

Project Name: TOLL PLAZA

Partner for Contact:
Order No.:
Company:
Customer No.:

Date: 03.01.2020
Operator: Abhishek Seth

Halonix Technologies Pvt Ltd

B-31, Phase-2, NoidaDist-Gautam Budh Nagar (UP)-201305

Operator Abhishek Seth
Telephone +918427771354
Fax +Fax +911204756101
e-Mail abhishek.seth@halonix.co.in

Table of contents

Project Name: TOLL PLAZA

Project Cover	1
Table of contents	2
TOLL PLAZA	
Planning data	3
Luminaires (coordinates list)	4
Sport Luminaires (Coordinates List)	6
Exterior Surfaces	
LHS TOLL PLAZA	
Value Chart (E, Perpendicular)	8
MIDDLE AREA TOLL PLAZA	
Value Chart (E, Perpendicular)	9
LHS TOLL PLAZA	
Value Chart (E, Perpendicular)	10
ROAD	
Planning data	11
Valuation Fields	
Valuation Field Roadway 1	
Value Chart (E)	12
Valuation Field Roadway 2	
Value Chart (E)	13

Halonix Technologies Pvt Ltd

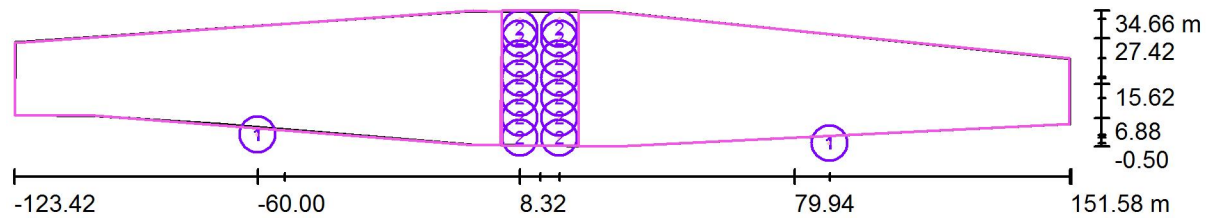
B-31, Phase-2, NoidaDist-Gautam Budh Nagar (UP)-201305

Operator Abhishek Seth

Telephone +918427771354

Fax +Fax +911204756101

e-Mail abhishek.seth@halonix.co.in

TOLL PLAZA / Planning data

Light loss factor: 0.85, ULR (Upward Light Ratio): 9.5%

Scale 1:1967

Luminaire Parts List

No.	Pieces	Designation (Correction Factor)	Φ (Luminaire) [lm]	Φ (Lamps) [lm]	P [W]
1	28	HALONIX 200W LED FLOOD LIGHT CWL (1.000)	22045	22045	200.0
2	14	Halonix 80W LED Canopy Light CWL (1.000)	8067	8067	80.0
Total:			730198	Total: 730198	6720.0

Halonix Technologies Pvt Ltd

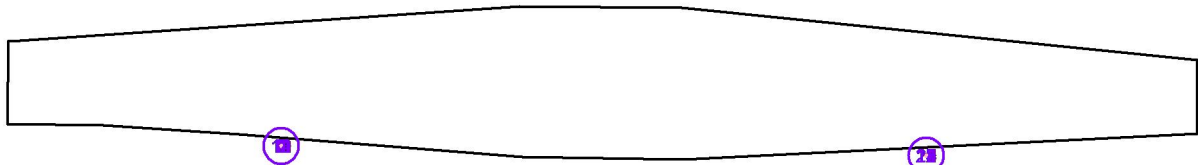
B-31, Phase-2, NoidaDist-Gautam Budh Nagar (UP)-201305

Operator Abhishek Seth
 Telephone +918427771354
 Fax +Fax +911204756101
 e-Mail abhishek.seth@halonix.co.in

TOLL PLAZA / Luminaires (coordinates list)

HALONIX 200W LED FLOOD LIGHT CWL (1.000)

22045 lm, 200.0 W, 1 x 1 x User defined (Correction Factor 1.000).



No.	Position [m]			Rotation [°]		
	X	Y	Z	X	Y	Z
1	-60.000	2.500	25.000	68.0	0.0	82.0
2	-60.000	2.500	25.000	68.0	0.0	77.0
3	-60.000	2.500	25.000	68.0	0.0	72.0
4	-60.000	2.500	25.000	68.0	0.0	67.0
5	-60.000	2.500	25.000	62.0	0.0	58.0
6	-60.000	2.500	25.000	55.0	0.0	45.0
7	-60.000	2.500	25.000	50.0	0.0	20.0
8	-60.000	2.500	25.000	50.0	0.0	-5.0
9	-60.000	2.500	25.000	55.0	0.0	-30.0
10	-60.000	2.500	25.000	62.0	0.0	-50.0
11	-60.000	2.500	25.000	70.0	0.0	-61.0
12	-60.000	2.500	25.000	70.0	0.0	-66.0
13	-60.000	2.500	25.000	68.0	0.0	-77.0
14	-60.000	2.500	25.000	68.0	0.0	-90.0
15	89.000	0.300	25.000	67.0	0.0	88.0
16	89.000	0.300	25.000	67.0	0.0	76.0
17	89.000	0.300	25.000	70.0	0.0	64.0
18	89.000	0.300	25.000	70.0	0.0	58.0
19	89.000	0.300	25.000	65.0	0.0	48.0
20	89.000	0.300	25.000	55.0	0.0	33.0
21	89.000	0.300	25.000	50.0	0.0	8.0
22	89.000	0.300	25.000	50.0	0.0	-17.0
23	89.000	0.300	25.000	55.0	0.0	-37.0
24	89.000	0.300	25.000	60.0	0.0	-55.0
25	89.000	0.300	25.000	68.0	0.0	-66.0
26	89.000	0.300	25.000	70.0	0.0	-72.0
27	89.000	0.300	25.000	70.0	0.0	-78.0
28	89.000	0.300	25.000	70.0	0.0	-84.0

Halonix Technologies Pvt Ltd

B-31, Phase-2, NoidaDist-Gautam Budh Nagar (UP)-201305

Operator Abhishek Seth

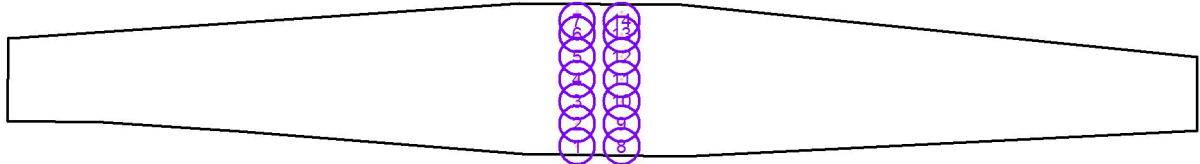
Telephone +918427771354

Fax +Fax +911204756101

e-Mail abhishek.seth@halonix.co.in

TOLL PLAZA / Luminaires (coordinates list)**Halonix 80W LED Canopy Light CWL (1.000)**

8067 lm, 80.0 W, 1 x 1 x User defined (Correction Factor 1.000).



No.	Position [m]			Rotation [°]		
	X	Y	Z	X	Y	Z
1	8.318	1.751	6.500	0.0	0.0	90.0
2	8.318	6.884	6.500	0.0	0.0	90.0
3	8.318	12.017	6.500	0.0	0.0	90.0
4	8.318	17.150	6.500	0.0	0.0	90.0
5	8.318	22.283	6.500	0.0	0.0	90.0
6	8.318	27.416	6.500	0.0	0.0	90.0
7	8.318	32.549	6.500	0.0	0.0	90.0
8	18.590	1.751	6.500	0.0	0.0	90.0
9	18.590	6.884	6.500	0.0	0.0	90.0
10	18.590	12.017	6.500	0.0	0.0	90.0
11	18.590	17.150	6.500	0.0	0.0	90.0
12	18.590	22.283	6.500	0.0	0.0	90.0
13	18.590	27.416	6.500	0.0	0.0	90.0
14	18.590	32.549	6.500	0.0	0.0	90.0

Halonix Technologies Pvt Ltd

B-31, Phase-2, NoidaDist-Gautam Budh Nagar (UP)-201305

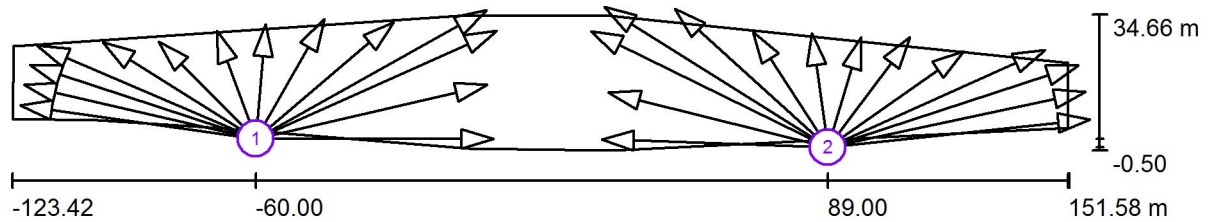
Operator Abhishek Seth

Telephone +918427771354

Fax +Fax +911204756101

e-Mail abhishek.seth@halonix.co.in

TOLL PLAZA / Sport Luminaires (Coordinates List)



Halonix Technologies Pvt Ltd

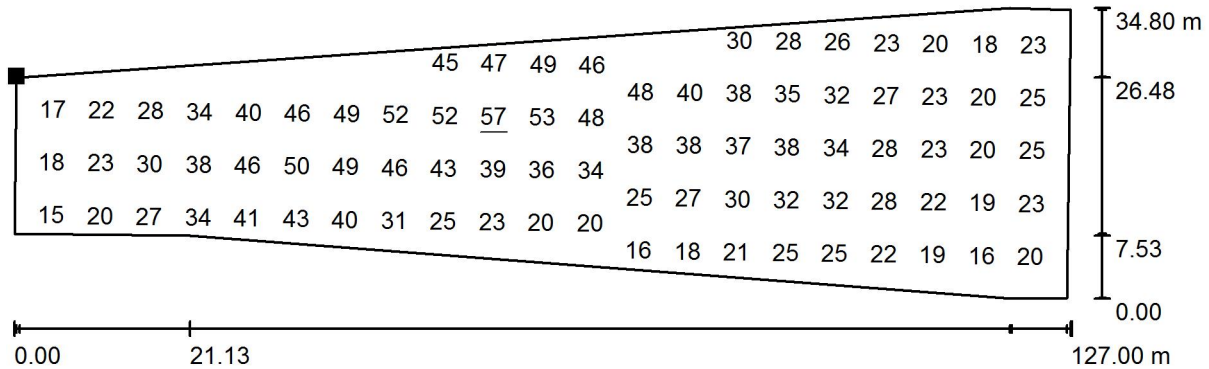
B-31, Phase-2, NoidaDist-Gautam Budh Nagar (UP)-201305

Operator Abhishek Seth

Telephone +918427771354

Fax +Fax +911204756101

e-Mail abhishek.seth@halonix.co.in


TOLL PLAZA / LHS TOLL PLAZA / Value Chart (E, Perpendicular)

Not all calculated values could be displayed.

Position of surface in external scene:

Marked point:

(-123.121 m, 26.422 m, 0.760 m)



Grid: 11 x 43 Points

 E_{av} [lx]
32

 E_{min} [lx]
13

 E_{max} [lx]
57

 u_0
0.405

 E_{min} / E_{max}
0.226

Halonix Technologies Pvt Ltd

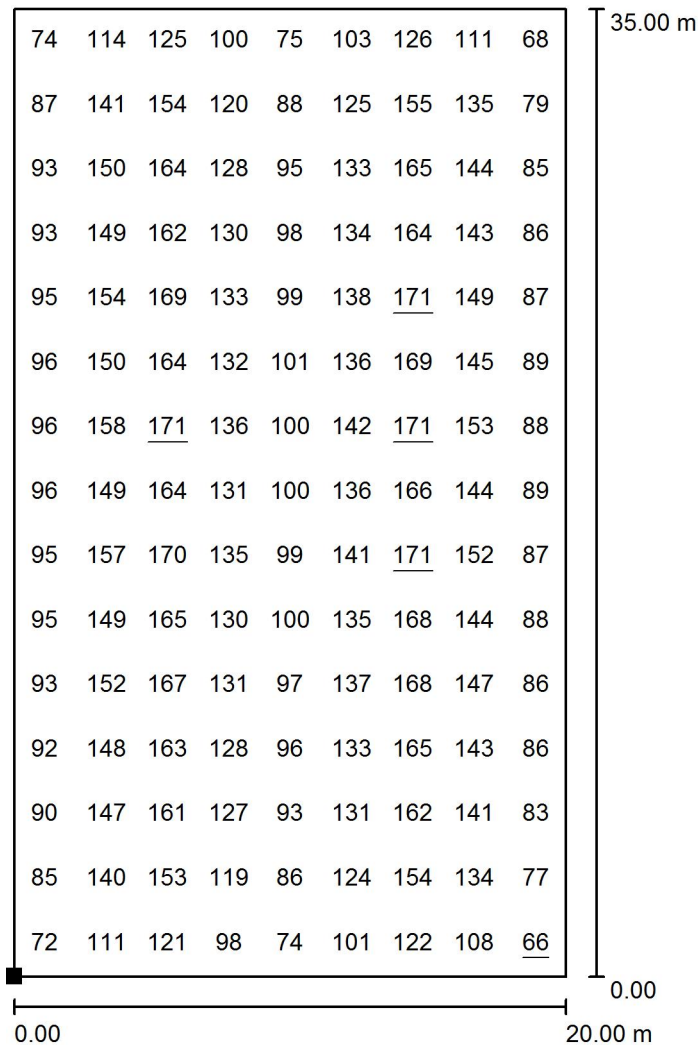
B-31, Phase-2, NoidaDist-Gautam Budh Nagar (UP)-201305

Operator Abhishek Seth

Telephone +918427771354

Fax +Fax +911204756101

e-Mail abhishek.seth@halonix.co.in


TOLL PLAZA / MIDDLE AREA TOLL PLAZA / Value Chart (E, Perpendicular)

Values in Lux, Scale 1 : 274

Position of surface in external scene:

Marked point:

(3.578 m, -0.387 m, 0.760 m)



Grid: 9 x 15 Points

 E_{av} [lx]
125

 E_{min} [lx]
66

 E_{max} [lx]
171

 u_0
0.527

 E_{min} / E_{max}
0.384

Halonix Technologies Pvt Ltd

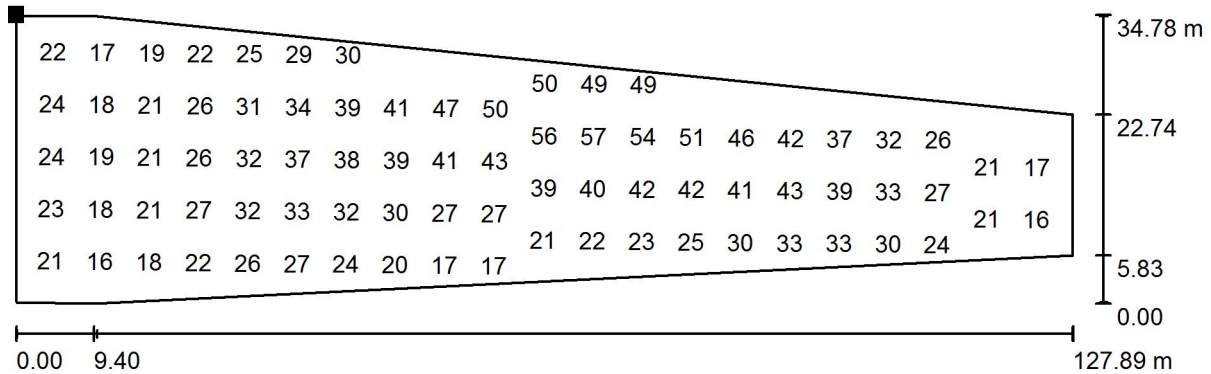
B-31, Phase-2, NoidaDist-Gautam Budh Nagar (UP)-201305

Operator Abhishek Seth

Telephone +918427771354

Fax +Fax +911204756101

e-Mail abhishek.seth@halonix.co.in


TOLL PLAZA / LHS TOLL PLAZA / Value Chart (E, Perpendicular)

Not all calculated values could be displayed.

Position of surface in external scene:

Marked point:

(23.617 m, 34.278 m, 0.760 m)



Grid: 43 x 11 Points

 E_{av} [lx]
31

 E_{min} [lx]
12

 E_{max} [lx]
59

 u_0
0.399

 E_{min} / E_{max}
0.207

Halonix Technologies Pvt Ltd

B-31, Phase-2, NoidaDist-Gautam Budh Nagar (UP)-201305

Operator Abhishek Seth

Telephone +918427771354

Fax +Fax +911204756101

e-Mail abhishek.seth@halonix.co.in

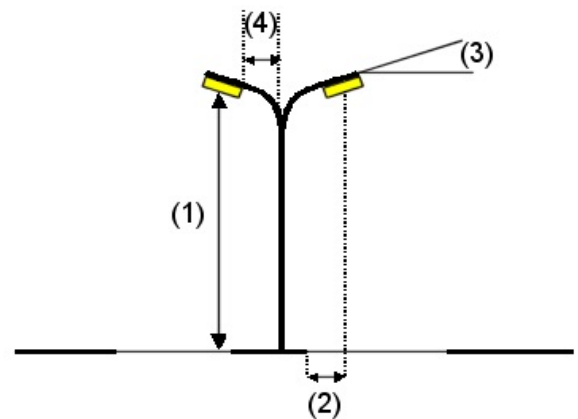
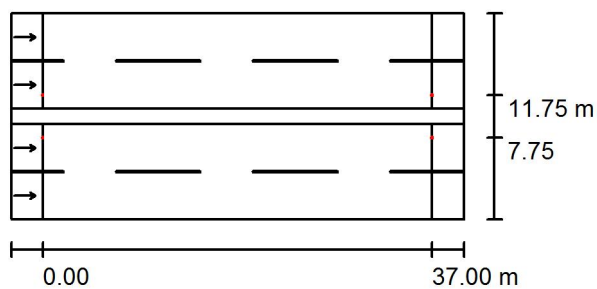
ROAD / Planning data**Street Profile**

Roadway 2 (Width: 9.000 m, Number of lanes: 2, tarmac: R3, q0: 0.070)

Median 1 (Width: 1.500 m, Height: 0.000 m)

Roadway 1 (Width: 9.000 m, Number of lanes: 2, tarmac: R3, q0: 0.070)

Light loss factor: 0.85

Luminaire Arrangements

Luminaire: HALONIX 210W LED STREET LIGHT CWL
 Luminous flux (Luminaire): 26348 lm
 Luminous flux (Lamps): 26362 lm
 Luminaire Wattage: 210.0 W
 Arrangement: on Median
 Pole Distance: 37.000 m
 Mounting Height (1): 10.000 m
 Height: 10.000 m
 Overhang (2): 1.500 m
 Boom Angle (3): 15.0 °
 Boom Length (4): 2.000 m

Maximum luminous intensities
 at 70°: 537 cd/klm
 at 80°: 122 cd/klm
 at 90°: 8.43 cd/klm

Any direction forming the specified angle from the downward vertical, with the luminaire installed for use.

Arrangement complies with luminous intensity class G2.

Arrangement complies with glare index class D.0.

Halonix Technologies Pvt Ltd

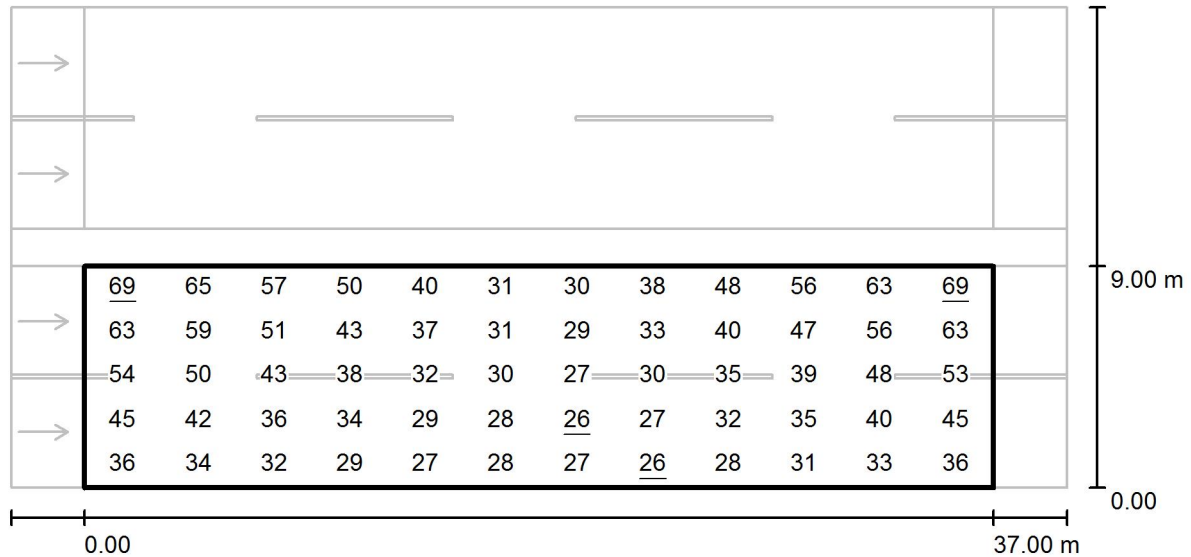
B-31, Phase-2, NoidaDist-Gautam Budh Nagar (UP)-201305

Operator Abhishek Seth

Telephone +918427771354

Fax +Fax +911204756101

e-Mail abhishek.seth@halonix.co.in

ROAD / Valuation Field Roadway 1 / Value Chart (E)

Values in Lux, Scale 1 : 308

Grid: 12 x 5 Points

 E_{av} [lx]
41

 E_{min} [lx]
26

 E_{max} [lx]
69

 $u0$
0.634

 E_{min} / E_{max}
0.375

Halonix Technologies Pvt Ltd

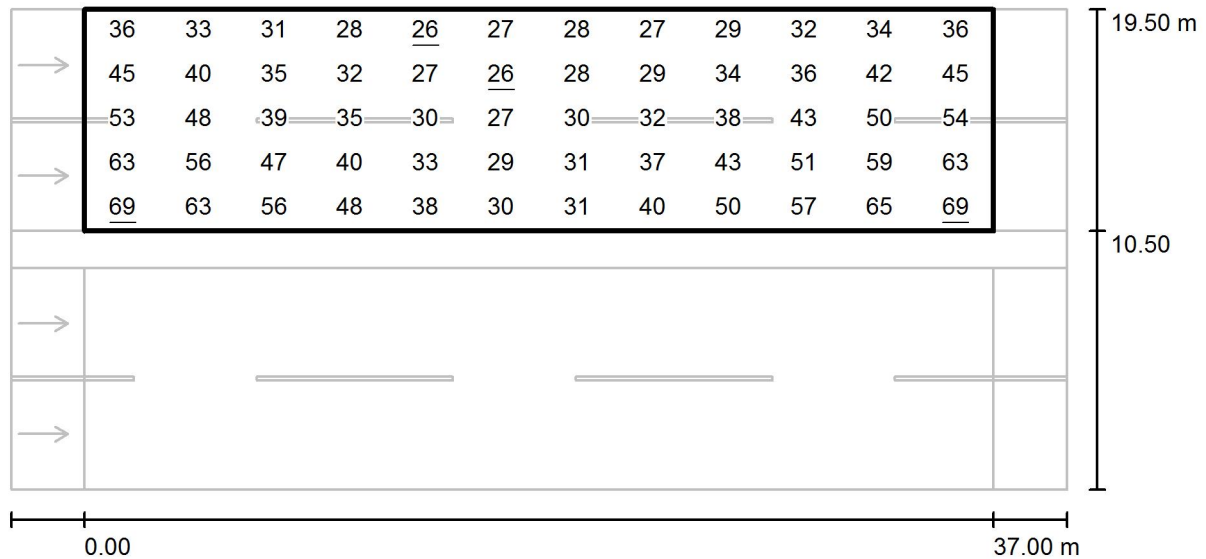
B-31, Phase-2, NoidaDist-Gautam Budh Nagar (UP)-201305

Operator Abhishek Seth

Telephone +918427771354

Fax +Fax +911204756101

e-Mail abhishek.seth@halonix.co.in

ROAD / Valuation Field Roadway 2 / Value Chart (E)

Values in Lux, Scale 1 : 308

Grid: 12 x 5 Points

 E_{av} [lx]
41

 E_{min} [lx]
26

 E_{max} [lx]
69

 $u0$
0.634

 E_{min} / E_{max}
0.375