

12W LED MOD DOWN LIGHT CW

Photometric & Electrical Measurement (As per IES LM 79-08 / IS 16106-12)

12W Energy Efficient LED Light

Issued by: Halonix Technologies Private Limited (NABL Certification No: TC-7634) 10/22/2019

HALONIX TECHNOLOGIES PRIVATE LIMITED HTPL LABORATORY (NABL Certificate No: TC-7634)

Plot-5, Sector-12, IIE, SIDCUL

Haridwar (Uttarakhand), PIN-249403, India

Contact:

Email: customercare@halonix.co.in

Fax:

Web: http://www.halonix.co.in

Test Report

Report Number: 22-10-2019 -003	Date:	22-10-2019	
Product Description: 12W Energy Efficient LED MOD Down Light			
Product Catalogue Reference: HLDLS-S06-12-CW	Brand	HALONIX	
Construction: Aluminum die cast housing, PMMA diffuser, etc.			
Test Details:	Document Referen	es/Standard:	
 Light intensity distribution Measurement Total Lumen output Measurement Electrical Parameters Measurement 	 IES-LM-79-08 "Electrical and Photometric Measurements of Solid-State Lighting Products" IS: 16106-2012 "Method of Electrical and Photometric solid state lighting (LED) Products" IS: 16105-2012 "Method of measurement of Lumen maintenance of solid state light sources" 		
Enclosures:			
Prepared By:	Approved By:		
Sanjay Sharma	Rajeev Chhabra		

HALONIX TECHNOLOGIES PRIVATE LIMITED HTPL LABORATORY (NABL Certificate No: TC-7634)

Photometric Test Report: (As Per IES LM 79-08)

Plot-5, Sector-12, IIE, SIDCUL

Haridwar (Uttarakhand), PIN-249403, India

Contact:

Email: customercare@halonix.co.in

Fax:

Web: http://www.halonix.co.in

Electrical & Photometric Test Report

Sample ID: 22-10-2019 -003					
Catalogue Reference:	HLDLS-S06-	HLDLS-S06-12-CW		22-10-2019	
Testing Agency:	HTPL Labora	HTPL Laboratory		HALONIX	
Equipment Used:		EVERFINE Brand Gonio Photometer (Type: GO - 2000B V1) and Globe Photometer (Type: PMS – 50/80) with Power Meter			
Ambient Temperature:	25±2°C	Relative Humidity:	65%		
Test Voltage:	240V	Frequency:	50Hz		
Stabilization Time:	30Min	Total Operating Time:	ting Time: 1.30Hours		
Rated Performance Parameters	•				
Rated Wattage :	12W	Rated Input Current:	0.058A		
Nomical CCT :	5700K	Nominal CRI:	>80		
Measured Electrical Parameters			1		
Supply Voltage:	240V	Input Current :	0.051A		
Frequency :	50Hz				
Total Power :	11.93W	Power Factor :	0.975		

Photometric Measurement Data:				
Total Measured Lumen :	1212.21lm	Luminaries Efficacy:	101.61lm/W	
CCT:	5831K	CRI:	82.7	
Light Intensity Distribution:		Attached (Refer to Page No. 4)		
Approved By: Rajeev Chhabra		Tested By: Sanjay Sharma		

HALONIX TECHNOLOGIES PRIVATE LIMITED HTPL LABORATORY (NABL Certificate No: TC-7634)

Plot-5, Sector-12, IIE, SIDCUL

Haridwar (Uttarakhand), PIN-249403, India


Contact:

Email: customercare@halonix.co.in

Fax:

Web: http://www.halonix.co.in

Light intensity Distribution Diagram

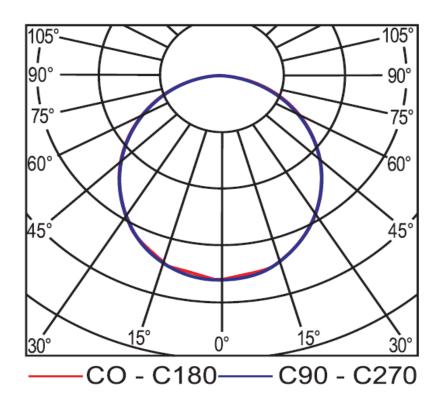

Catalogue Reference	HLDLS-S06-12-CW	Sample ID	22-10-2019 -003