



## **500W LED HW FLOOD LIGHT**

**Photometric & Electrical Measurement (As per IES LM 79-08 / IS 16106-12)**

**500W Energy Efficient LED Flood Light**

**Issued by: Halonix Technologies Private Limited (NABL Certification No: TC-7634)**

**01/31/2019**

**HALONIX TECHNOLOGIES PRIVATE LIMITED****HTPL LABORATORY (NABL Certificate No: TC-7634)**

Plot-5, Sector-12, IIE, SIDCUL

Haridwar (Uttarakhand), PIN-249403, India

Contact:

Email: [customercare@halonix.co.in](mailto:customercare@halonix.co.in)

Fax:

Web: <http://www.halonix.co.in>

---

**Test Report**

<b>Report Number:</b>	31-01-2019 -001	<b>Date:</b>	31-01-2019
<b>Product Description:</b> 500W Energy Efficient LED Flood Light			
<b>Product Catalogue Reference:</b>	HLFLD-ML10-500-CWL	<b>Brand:</b>	HALONIX
<b>Construction:</b> Pressure die casted aluminum housing with aluminum extruded heat sink, Glass front visor, SMD LED, Electronic driver etc.			
<b>Test Details:</b>		<b>Document References/Standard:</b>	
<ul style="list-style-type: none"><li>• Light intensity distribution Measurement</li><li>• Total Lumen output Measurement</li><li>• Electrical Parameters Measurement</li></ul>		<ul style="list-style-type: none"><li>• IES-LM-79-08 "Electrical and Photometric Measurements of Solid-State Lighting Products"</li><li>• IS : 16106-2012 "Method of Electrical and Photometric solid state lighting (LED) Products"</li><li>• IS : 16105-2012 "Method of measurement of Lumen maintenance of solid state light sources"</li></ul>	
<b>Enclosures:</b>			
<b>Prepared By:</b>		<b>Approved By:</b>	
Sanjay Sharma		Rajeev Chhabra	

**HALONIX TECHNOLOGIES PRIVATE LIMITED**  
**HTPL LABORATORY (NABL Certificate No: TC-7634)**

Plot-5, Sector-12, IIE, SIDCUL

Haridwar (Uttarakhand), PIN-249403, India

Contact:

Email: [customercare@halonix.co.in](mailto:customercare@halonix.co.in)

Fax:

Web: <http://www.halonix.co.in>

---

**Electrical & Photometric Test Report**

<b>Photometric Test Report:</b> (As Per IES LM 79-08)			
<b>Sample ID:</b> 31-01-2019 -001			
<b>Catalogue Reference:</b>	HLFLD-ML10-500-CWL	<b>Testing Date:</b>	31-01-2019
<b>Testing Agency:</b>	HTPL Laboratory	<b>Brand:</b>	HALONIX
<b>Equipment Used:</b>	EVERFINE Brand Gonio Photometer (Type: GO - 2000B V1) and Globe Photometer (Type: PMS – 50/80) with Power Meter		

<b>Ambient Temperature:</b>	25±2°C	<b>Relative Humidity:</b>	65%
<b>Test Voltage:</b>	240V	<b>Frequency:</b>	50Hz
<b>Stabilization Time:</b>	30Min	<b>Total Operating Time:</b>	1.30Hours

<b>Rated Performance Parameters:</b>			
<b>Rated Wattage :</b>	500W	<b>Rated Input Current :</b>	2.303A
<b>Nomical CCT :</b>	5700K	<b>Nominal CRI :</b>	>70

<b>Measured Electrical Parameters:</b>			
<b>Supply Voltage :</b>	240V	<b>Input Current :</b>	2.109A
<b>Frequency :</b>	50Hz		
<b>Total Power :</b>	498.51W	<b>Power Factor :</b>	0.985

<b>Photometric Measurement Data:</b>			
<b>Total Measured Lumen :</b>	51271.75lm	<b>Luminaries Efficacy :</b>	102.85lm/W
<b>CCT :</b>	5783K	<b>CRI :</b>	71.9
<b>Light Intensity Distribution:</b>	Attached (Refer to Page No. 4)		
<b>Approved By:</b> Rajeev Chhabra	<b>Tested By:</b> Sanjay Sharma		

**HALONIX TECHNOLOGIES PRIVATE LIMITED**

**HTPL LABORATORY (NABL Certificate No: TC-7634)**

Plot-5, Sector-12, IIE, SIDCUL

Haridwar (Uttarakhand), PIN-249403, India


Contact:

Email: [customercare@halonix.co.in](mailto:customercare@halonix.co.in)

Fax:

Web: <http://www.halonix.co.in>

**Light intensity Distribution Diagram**

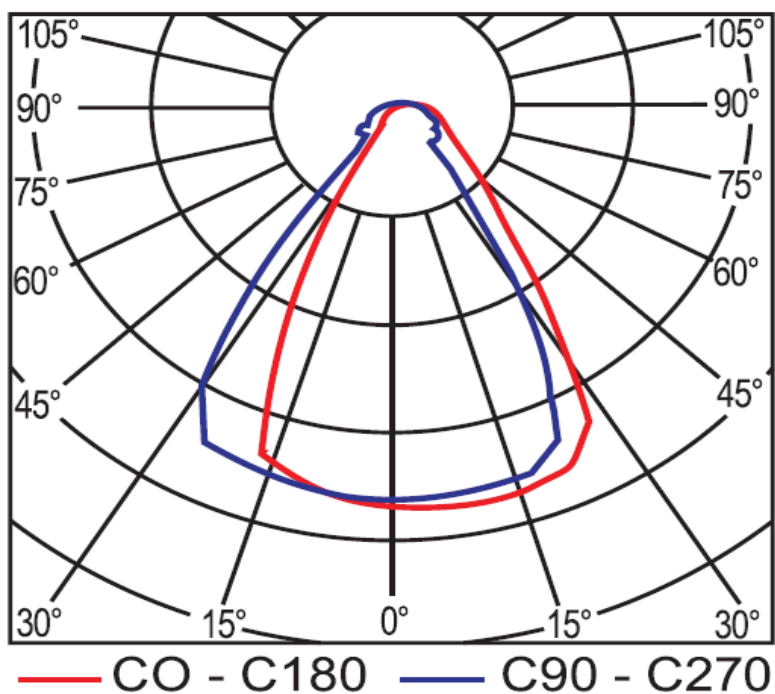

Catalogue Reference	HLFLD-ML10-500-CWL	Sample ID	31-01-2019 -001
---------------------	--------------------	-----------	-----------------