

## **LED 45W HW Street Light**

### **HLSLD-15-45-CWL-R**

As per IS 10322 (Part-5/Sec-3) & IEC 60598-1




**Product Description:** Energy efficient 45W LED Street Light

### **Technical Specifications:**

Main Housing / Heat Sink Material:	Aluminium PDC
Front Cover:	Clear toughened glass
Lens:	Suitable high efficient secondary lens
LED:	LM80 certified LED
Lumen Maintenance:	50000 hours @ L70
Control Gear:	Isolated, Electronic, CC Driver
Internal Wiring:	Insulated Cu wire
Hardware:	SS & MS Zinc plated and passivated
Ingress Protection:	IP66
Impact Resistance:	IK05
Operating Voltage Range:	90V~ 300V
Operating Temperature:	-10°C~ 55°C

### **GA Drawing:**

A: 375mm  
 B: 145mm  
 C: 70mm  
 Ø: 45mm

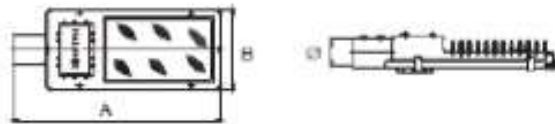

All dimensions in mm (Tolerance: ±5mm)

### **Electrical & Photometry Parameters:**

Rated Voltage & Frequency	System Wattage	System Current	Power Factor	System Lumen Efficacy	CCT (As per ANSI)	CRI	THD	Driver Efficiency
240V, 50Hz	45W±10%	<217mA	≥0.95	≥100lm/W	5700K	≥70	≤10%	≥85%

### **System Protections:**

Open & Short circuit protection, reverse polarity protection, high voltage cut off at 300V±10V, surge protection of 5KV internal + 10KV SPD.

### **Application:**

Street and road lighting, city squares, periphery lighting, complex boundry lighting, outdoor lighting, etc.

### **Mounting:**

Pole mounting, suitable up to 40mm OD pipe bracket.

Note: Due to continuous efforts in developing products, improvement M/s Halonix Technologies Pvt Ltd reserves the right to make changes in the design and data and withdraw the luminaries without any prior notice.	Prepared by :	MK/NK	Industrial Luminaire :
	Checked by :	AS	Cat. Ref. : HLSLD-15-45-CWL-R
	Approved by :	RL	Document No : HWR-R-2019-KLI

As improvement in design & method of manufacturing is a continuous process, the product supplied may differ in details from above given data.