



## **70W LED HW STREET LIGHT**

**Photometric & Electrical Measurement (As per IES LM 79-08 / IS 16106-12)**

**70W Energy Efficient LED Street Light**

**Issued by: Halonix Technologies Private Limited (NABL Certification No: TC-7634)**

**11/05/2019**

**HALONIX TECHNOLOGIES PRIVATE LIMITED****HTPL LABORATORY (NABL Certificate No: TC-7634)**

Plot-5, Sector-12, IIE, SIDCUL

Haridwar (Uttarakhand), PIN-249403, India

Contact:

Email: [customercare@halonix.co.in](mailto:customercare@halonix.co.in)

Fax:

Web: <http://www.halonix.co.in>

---

**Test Report**

<b>Report Number:</b>	05-11-2019 -001	<b>Date:</b>	05-11-2019
<b>Product Description:</b> 70W Energy Efficient LED Street Light			
<b>Product Catalogue Reference:</b>		<b>Brand:</b>	HALONIX
<b>Construction:</b> Pressure die casted aluminum housing, PC front visor, SMD LED, Electronic driver etc.			
<b>Test Details:</b>		<b>Document References/Standard:</b>	
Light intensity distribution Measurement Total Lumen output Measurement Electrical Parameters Measurement		IES-LM-79-08 "Electrical and Photometric Measurements of Solid-State Lighting Products" IS : 16106-2012 "Method of Electrical and Photometric solid state lighting (LED) Products" IS : 16105-2012 "Method of measurement of Lumen maintenance of solid state light sources"	
<b>Enclosures:</b>			
<b>Prepared By:</b>		<b>Approved By:</b>	
Sanjay Sharma		Rajeev Chhabra	

**HALONIX TECHNOLOGIES PRIVATE LIMITED****HTPL LABORATORY (NABL Certificate No: TC-7634)**

Plot-5, Sector-12, IIE, SIDCUL

Haridwar (Uttarakhand), PIN-249403, India

Contact:

Email: [customercare@halonix.co.in](mailto:customercare@halonix.co.in)

Fax:

Web: <http://www.halonix.co.in>

---

**Electrical & Photometric Test Report****Photometric Test Report: (As Per IES LM 79-08)****Sample ID:** 05-11-2019 -001

<b>Catalogue Reference:</b>		<b>Testing Date:</b>	05-11-2019
<b>Testing Agency:</b>	HTPL Laboratory	<b>Brand:</b>	HALONIX
<b>Equipment Used:</b>	EVERFINE Brand Gonio Photometer (Type: GO - 2000B V1) and Globe Photometer (Type: PMS – 50/80) with Power Meter		

<b>Ambient Temperature:</b>	25±2°C	<b>Relative Humidity:</b>	65%
<b>Test Voltage:</b>	240V	<b>Frequency:</b>	50Hz
<b>Stabilization Time:</b>	30Min	<b>Total Operating Time:</b>	1.30Hours

**Rated Performance Parameters:**

<b>Rated Wattage :</b>	70W	<b>Rated Input Current :</b>	0.338A
<b>Nomical CCT :</b>	6000K	<b>Nominal CRI :</b>	>70

**Measured Electrical Parameters:**

<b>Supply Voltage :</b>	240V	<b>Input Current :</b>	0.299A
<b>Frequency :</b>	50Hz		
<b>Total Power :</b>	69.95W	<b>Power Factor :</b>	0.975

**Photometric Measurement Data:**

<b>Total Measured Lumen :</b>	7142.59lm	<b>Luminaries Efficacy :</b>	102.11lm/W
<b>CCT :</b>	5899K	<b>CRI :</b>	72.1
<b>Light Intensity Distribution:</b>	Attached (Refer to Page No. 4)		
<b>Approved By: Rajeev Chhabra</b>	<b>Tested By: Sanjay Sharma</b>		

**HALONIX TECHNOLOGIES PRIVATE LIMITED**

**HTPL LABORATORY (NABL Certificate No: TC-7634)**

Plot-5, Sector-12, IIE, SIDCUL

Haridwar (Uttarakhand), PIN-249403, India


Contact:

Email: [customercare@halonix.co.in](mailto:customercare@halonix.co.in)

Fax:

Web: <http://www.halonix.co.in>

**Light intensity Distribution Diagram**

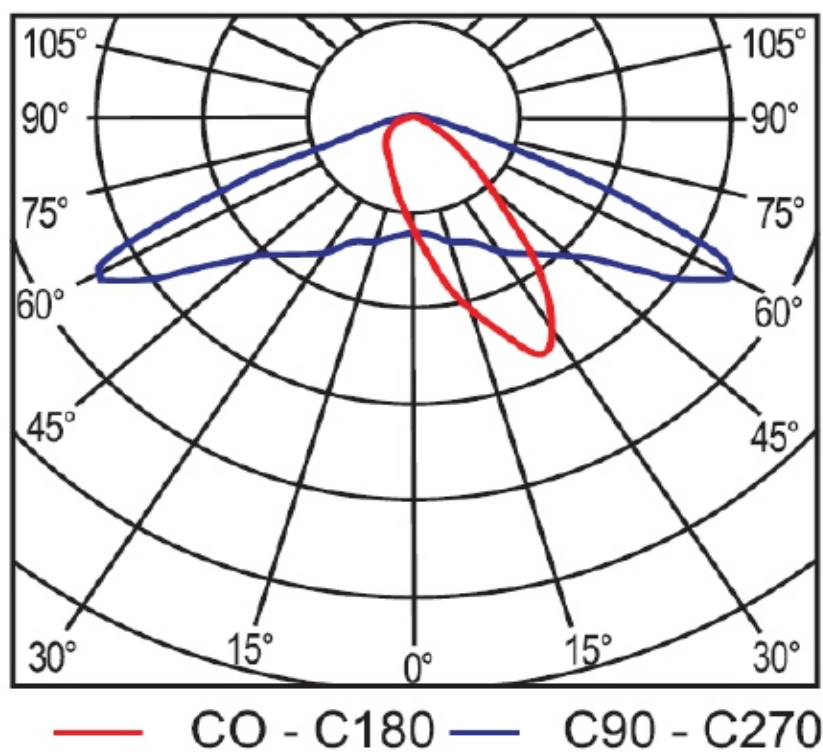

Catalogue Reference		Sample ID	05-11-2019 -001
---------------------	--	-----------	-----------------