

36W 1'X4' LED PANEL LIGHT CW

Photometric & Electrical Measurement (As per IES LM 79-08 / IS 16106-12)

36W Energy Efficient LED Light

Issued by: Halonix Technologies Private Limited (NABL Certification No: TC-7634) 12/14/2018

HALONIX TECHNOLOGIES PRIVATE LIMITED HTPL LABORATORY (NABL Certificate No: TC-7634)

Plot-5, Sector-12, IIE, SIDCUL

Haridwar (Uttarakhand), PIN-249403, India

Contact:

Email: customercare@halonix.co.in

Fax:

Web: http://www.halonix.co.in

Test Report

Report Number: 14-12-2018 -002	Date	: 14-12-2018	
Product Description: 36W Energy Efficient 1'X4' LED Panel			
Product Catalogue Reference: HLFPS14-06-36-CW	Branc	I: HALONIX	
Construction: CRCA housing, PMMA diffuser, etc.			
Test Details:	Document Refere	ces/Standard:	
 Light intensity distribution Measurement Total Lumen output Measurement Electrical Parameters Measurement 	 IES-LM-79-08 "Electrical and Photometric Measurements of Solid-State Lighting Products" IS: 16106-2012 "Method of Electrical and Photometric solid state lighting (LED) Products" IS: 16105-2012 "Method of measurement of Lumen maintenance of solid state light sources" 		
Enclosures:			
Prepared By:	Approve	d By:	
Sanjay Sharma	Rajeev Ch	habra	

HALONIX TECHNOLOGIES PRIVATE LIMITED HTPL LABORATORY (NABL Certificate No: TC-7634)

Plot-5, Sector-12, IIE, SIDCUL

Haridwar (Uttarakhand), PIN-249403, India

Contact:

Email: customercare@halonix.co.in

Fax:

Web: http://www.halonix.co.in

Electrical & Photometric Test Report

Photometric Test Report: (As Per IES LM 79-08)					
Sample ID: 14-12-2018 -002					
Catalogue Reference:	HLFPS14-06-36-CW	Testing Date:	14-12-2018		
Testing Agency:	HTPL Laboratory	Brand:	HALONIX		
Equipment Used:	uipment Used: EVERFINE Brand Gonio Photometer (Type: GO - 2000B V1) and Globe				
	Photometer (Type: PMS – 50/80) with Power Meter				
	05.200 B.L.: 11 111	CE0/			

Ambient Temperature:	25±2°C	Relative Humidity:	65%
Test Voltage:	240V	Frequency:	50Hz
Stabilization Time:	30Min	Total Operating Time:	1.30Hours

Rated Performance Parameters:			
Rated Wattage :	36W	Rated Input Current:	0.174A
Nomical CCT :	6500K	Nominal CRI:	>80

Measured Electrical Parameters:			
Supply Voltage:	240V	Input Current :	0.152A
Frequency:	50Hz		
Total Power :	35.92W	Power Factor :	0.985

Photometric Measurement Data:			
Total Measured Lumen :	3669.23lm	Luminaries Efficacy:	102.15lm/W
CCT:	6405K	CRI:	82.2
Light Intensity Distribution:		Attached (Refer to Page No. 4)	
Approved By: Rajeev Chhabra		Tested By: Sanjay Sharma	

HALONIX TECHNOLOGIES PRIVATE LIMITED HTPL LABORATORY (NABL Certificate No: TC-7634)

Plot-5, Sector-12, IIE, SIDCUL

Haridwar (Uttarakhand), PIN-249403, India


Contact:

Email: customercare@halonix.co.in

Fax:

Web: http://www.halonix.co.in

Light intensity Distribution Diagram

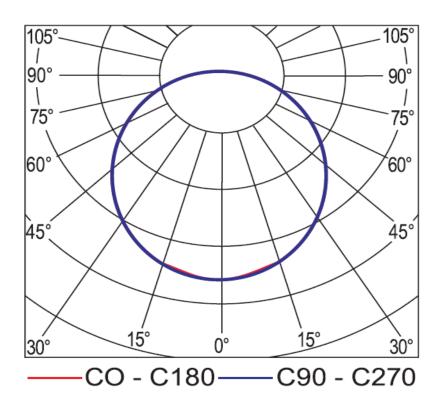

Catalogue Reference	HLFPS14-06-36-CW	Sample ID	14-12-2018 -002