

### 40W 2'X2' LED PANEL LIGHT CW

Photometric & Electrical Measurement (As per IES LM 79-08 / IS 16106-12)

**40W Energy Efficient LED Light** 

Issued by: Halonix Technologies Private Limited (NABL Certification No: TC-7634) 01/10/2019

# HALONIX TECHNOLOGIES PRIVATE LIMITED HTPL LABORATORY (NABL Certificate No: TC-7634)

Plot-5, Sector-12, IIE, SIDCUL

Haridwar (Uttarakhand), PIN-249403, India

Contact:

Email: customercare@halonix.co.in

Fax:

Web: http://www.halonix.co.in

#### **Test Report**

Report Number: 10-01-20	019 -003		Date:	10-01-2019
<b>Product Description:</b> 40W Energy Efficient 2'X2' LED Pane				
Product Catalogue Reference:	HLFPR22-02-40-CW-R		Brand:	HALONIX
Construction: CRCA housing, PMMA diffuser, etc.				
Test Detail	s:	Document I	Reference	s/Standard:
<ul> <li>Light intensity distribution Measurement</li> <li>Total Lumen output Measurement</li> <li>Electrical Parameters Measurement</li> </ul>		<ul> <li>IES-LM-79-08 "Electrical and Photometric Measurements of Solid-State Lighting Products"</li> <li>IS: 16106-2012 "Method of Electrical and Photometric solid state lighting (LED) Products"</li> <li>IS: 16105-2012 "Method of measurement of Lumen maintenance of solid state light sources"</li> </ul>		
Enclosures:				
Prepared By:		A	pproved B	y:
Sanjay Sharma		Rajeev Chhabra		

# HALONIX TECHNOLOGIES PRIVATE LIMITED HTPL LABORATORY (NABL Certificate No: TC-7634)

Plot-5, Sector-12, IIE, SIDCUL

Haridwar (Uttarakhand), PIN-249403, India

Contact:

Email: customercare@halonix.co.in

Fax:

Web: http://www.halonix.co.in

#### **Electrical & Photometric Test Report**

Photometric Test Report: (As	Per IES LM 79-08)			
Sample ID: 10-01-2019 -003				
Catalogue Reference:	HLFPR22-02	HLFPR22-02-40-CW-R		10-01-2019
Testing Agency:	HTPL Labor	HTPL Laboratory		HALONIX
Equipment Used:	EVERFINE B	EVERFINE Brand Gonio Photometer (Type: GO - 2000B V1) and Globe		
	Photomete	Photometer (Type: PMS – 50/80) with Power Meter		
Ambient Temperature:	25±2°C	Relative Humidity:	65%	
Test Voltage:	240V	Frequency:	50Hz	
Stabilization Time:	30Min	Total Operating Time:	1.30Hours	
		•	_	
Rated Performance Parameters	s:			
Rated Wattage :	40W	Rated Input Current:	0.193A	
Nomical CCT :	6500K	Nominal CRI:	>80	

Measured Electrical Parameters:				
Supply Voltage:	240V	Input Current :	0.169A	
Frequency:	50Hz			
Total Power :	39.88W	Power Factor :	0.983	

Photometric Measurement Data:				
Total Measured Lumen :	4075.34lm	Luminaries Efficacy:	102.19lm/W	
CCT:	6408K	CRI:	81.9	
Light Intensity Distribution:		Attached (Refer to Page No. 4)		
Approved By: Rajeev Chhabra		Tested By: Sanjay Sharma		

### HALONIX TECHNOLOGIES PRIVATE LIMITED HTPL LABORATORY (NABL Certificate No: TC-7634)

Plot-5, Sector-12, IIE, SIDCUL

Haridwar (Uttarakhand), PIN-249403, India


Contact:

Email: customercare@halonix.co.in

Fax:

Web: http://www.halonix.co.in

#### **Light intensity Distribution Diagram**

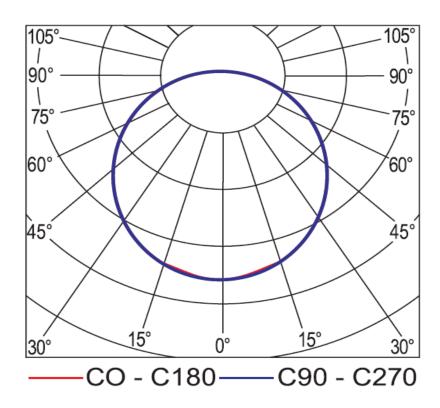

Catalogue Reference	HLFPR22-02-40-CW-R	Sample ID	10-01-2019 -003