

## LED 20W Down Light

### HLDLR-31-20-CW

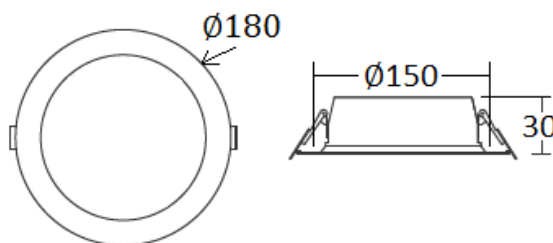
As per IS 10322 &amp; IEC 60598-1


**Product Description:** Energy efficient 20W LED Down Light

### Technical Specifications:

Main Housing / Heat Sink Material:	Duly powder coated Aluminium PDC
Front Cover:	PMMA
LED:	LM80 certified LED
Control Gear:	External CC driver
Internal Wiring:	Insulated Cu wire
Hardware:	SS & MS Zinc plated and passivated
Ingress Protection:	IP20
Operating Voltage:	120V~300V
Operating Temperature:	-10°C~ 50°C

### GA Drawing:


 All dimensions in mm (Tolerance:  $\pm 5$ mm)

### Electrical & Photometry Parameters:

Rated Voltage & Frequency	System Wattage	System Current	Power Factor	System Lumen Efficacy	CCT (As per ANSI)	CRI	THD	Driver Efficiency
240V, 50Hz	20W $\pm 10\%$	<96mA	>0.95	$\geq 90$ lm/W	6500K	$\geq 80$	$\leq 10\%$	$\geq 85\%$

### System Protections:

Open &amp; Short circuit protection, reverse polarity protection, surge protection of 3.0KV internal.

### Application:

Offices, commercial complexes, showrooms, retail outlets, malls, reception lobbies, hotel lobbies, high roof Indoor lighting applications, etc.

### Mounting:

Recessed mounting.

Note: Due to continuous efforts in developing products, improvement M/s Halonix Technologies Pvt Ltd reserves the right to make changes in the design and data and withdraw the luminaires without any prior notice.	Prepared by :	MK/NK	Industrial Luminaire :
	Checked by :	AS	Cat. Ref. : HLDLR-31-20-CW
	Approved by :	RL	Document No :

As improvement in design &amp; method of manufacturing is a continuous process, the product supplied may differ in details from above given data.