

## LED 32W Linear Light

**HLLL-P42-32-NW-AL-03-0.8M**

As per IS 10322 & IEC 60598-1




**Product Description:** Energy efficient 32 LED Linear Light

### Technical Specifications:

Main Housing:	Epoxy powder coated Aluminum extruded
Front Cover:	PC
LED:	LM80 certified LED
Lumen Maintenance:	50000 hours @ L70
Control Gear:	Isolated, Electronic, CC Driver
Internal Wiring:	Insulated Cu wire
Hardware:	SS & MS Zinc plated and passivated
Ingress Protection:	IP20
Operating Voltage Range:	140V~270V
Operating Temperature:	-10°C~ 50°C

### GA Drawing:

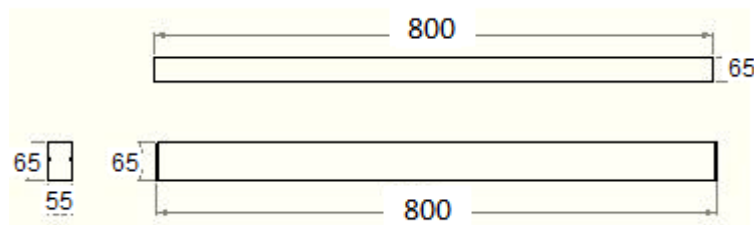

All dimensions are in mm (Tolerance:  $\pm 5$ mm)

### Electrical & Photometry Parameters:

Rated Voltage & Frequency	System Wattage	System Current	Power Factor	System Lumen Efficacy	CCT (As per ANSI)	CRI	THD	Driver Efficiency
240V, 50Hz	32W $\pm 10\%$	<154mA	$\geq 0.95$	$\geq 100\text{lm/W}$	4000K	$\geq 80$	$\leq 10\%$	$\geq 85\%$

### System Protections:

Open & Short circuit protection, reverse polarity protection, surge protection of 3KV internal.

### Application:

Office space, conference room, general area, etc.

### Mounting:

Suspended.

Note: Due to continuous efforts in developing products, improvement M/s Halonix Technologies Pvt. Ltd. reserves the right to make changes in the design and data and withdraw the luminaries without any prior notice.

Prepared by :	MK/NK	Industrial Luminaire :
Checked by :	AS	Cat. Ref. : HLLL-P42-32-NW-AL-03-0.8M
Approved by :	RL	Document No : ELI- 2019

As improvement in design & method of manufacturing is a continuous process, the product supplied may differ in details from above given data.