



36W 1'X4' LED PANEL LIGHT CW

Photometric & Electrical Measurement (As per IES LM 79-08 / IS 16106-12)

36W Energy Efficient LED Light

Issued by: Halonix Technologies Private Limited (NABL Certification No: TC-7634)

09/05/2019

HALONIX TECHNOLOGIES PRIVATE LIMITED
HTPL LABORATORY (NABL Certificate No: TC-7634)

Plot-5, Sector-12, IIE, SIDCUL

Haridwar (Uttarakhand), PIN-249403, India

Contact:

Email: customercare@halonix.co.in

Fax:

Web: <http://www.halonix.co.in>

Test Report

| | | | |
|---|----------------------|--|------------|
| Report Number: | 05-09-2019 -003 | Date: | 05-09-2019 |
| Product Description: 36W Energy Efficient 1'X4' LED Panel | | | |
| Product Catalogue Reference: | HLFPR14-06-36-CW-HL1 | Brand: | HALONIX |
| Construction: CRCA housing, PMMA diffuser, etc. | | | |
| Test Details: | | Document References/Standard: | |
| <ul style="list-style-type: none">• Light intensity distribution Measurement• Total Lumen output Measurement• Electrical Parameters Measurement | | <ul style="list-style-type: none">• IES-LM-79-08 "Electrical and Photometric Measurements of Solid-State Lighting Products"• IS : 16106-2012 "Method of Electrical and Photometric solid state lighting (LED) Products"• IS : 16105-2012 "Method of measurement of Lumen maintenance of solid state light sources" | |
| Enclosures: | | | |
| Prepared By: | | Approved By: | |
| Sanjay Sharma | | Rajeev Chhabra | |

HALONIX TECHNOLOGIES PRIVATE LIMITED
HTPL LABORATORY (NABL Certificate No: TC-7634)
 Plot-5, Sector-12, IIE, SIDCUL
 Haridwar (Uttarakhand), PIN-249403, India
 Contact:
 Email: customercare@halonix.co.in
 Fax:
 Web: <http://www.halonix.co.in>

Electrical & Photometric Test Report

| | | | |
|---|---|----------------------|------------|
| Photometric Test Report: (As Per IES LM 79-08) | | | |
| Sample ID: 05-09-2019 -003 | | | |
| Catalogue Reference: | HLFPR14-06-36-CW-HL1 | Testing Date: | 05-09-2019 |
| Testing Agency: | HTPL Laboratory | Brand: | HALONIX |
| Equipment Used: | EVERFINE Brand Gonio Photometer (Type: GO - 2000B V1) and Globe Photometer (Type: PMS – 50/80) with Power Meter | | |

| | | | |
|-----------------------------|--------|------------------------------|-----------|
| Ambient Temperature: | 25±2°C | Relative Humidity: | 65% |
| Test Voltage: | 240V | Frequency: | 50Hz |
| Stabilization Time: | 30Min | Total Operating Time: | 1.30Hours |

| | | | |
|--------------------------------------|-------|------------------------------|--------|
| Rated Performance Parameters: | | | |
| Rated Wattage : | 36W | Rated Input Current : | 0.174A |
| Nomical CCT : | 6500K | Nominal CRI: | >80 |

| | | | |
|--|--------|------------------------|--------|
| Measured Electrical Parameters: | | | |
| Supply Voltage : | 240V | Input Current : | 0.153A |
| Frequency : | 50Hz | | |
| Total Power : | 35.87W | Power Factor : | 0.977 |

| | | | |
|--------------------------------------|---------------------------------|------------------------------|------------|
| Photometric Measurement Data: | | | |
| Total Measured Lumen : | 3980.85lm | Luminaries Efficacy : | 110.98lm/W |
| CCT : | 6401K | CRI : | 81.6 |
| Light Intensity Distribution: | Attached (Refer to Page No. 4) | | |
| Approved By: Rajeev Chhabra | Tested By: Sanjay Sharma | | |

HALONIX TECHNOLOGIES PRIVATE LIMITED

HTPL LABORATORY (NABL Certificate No: TC-7634)

Plot-5, Sector-12, IIE, SIDCUL

Haridwar (Uttarakhand), PIN-249403, India


Contact:

Email: customercare@halonix.co.in

Fax:

Web: <http://www.halonix.co.in>

Light intensity Distribution Diagram

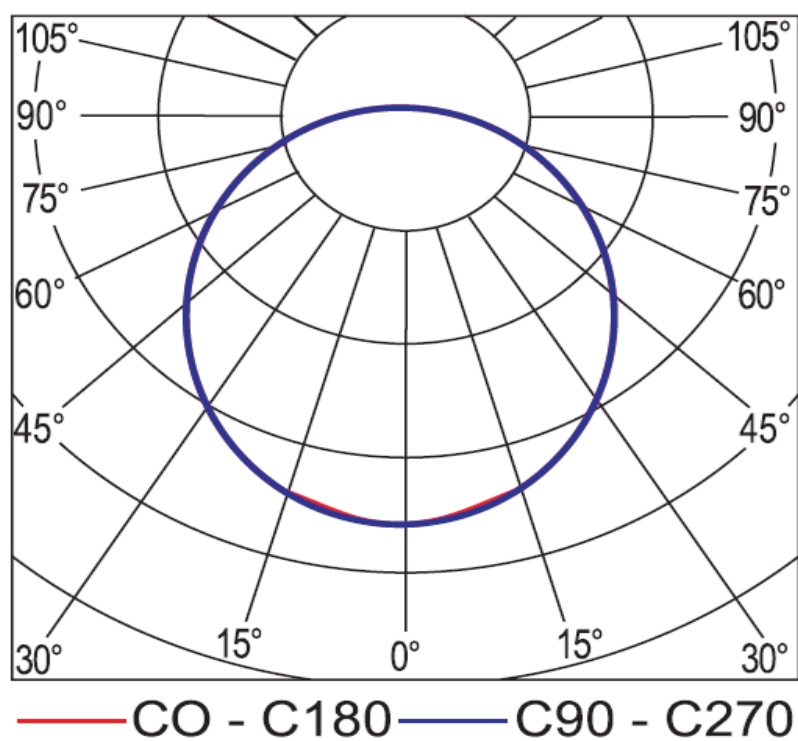

| | | | |
|---------------------|----------------------|-----------|-----------------|
| Catalogue Reference | HLFPR14-06-36-CW-HL1 | Sample ID | 05-09-2019 -003 |
|---------------------|----------------------|-----------|-----------------|