

18W LED PL LAMP CW

Photometric & Electrical Measurement (As per IES LM 79-08 / IS 16106-12)

18W Energy Efficient LED Light

Issued by: Halonix Technologies Private Limited (NABL Certification No: TC-7634) 03/08/2019

HALONIX TECHNOLOGIES PRIVATE LIMITED HTPL LABORATORY (NABL Certificate No: TC-7634)

Plot-5, Sector-12, IIE, SIDCUL

Haridwar (Uttarakhand), PIN-249403, India

Contact:

Email: customercare@halonix.co.in

Fax:

Web: http://www.halonix.co.in

Test Report

Report Number: 08-03-2019 -001		Date:	08-03-2019
Product Description: 18W Energy Efficient LED PL Lamp			
Product Catalogue Reference: HLLL-01-18-CW		Brand:	HALONIX
Aluminum housing, PC diffuser, etc.			
Test Details:	Document References/Standard:		
 Light intensity distribution Measurement Total Lumen output Measurement Electrical Parameters Measurement 	 IES-LM-79-08 "Electrical and Photometric Measurements of Solid-State Lighting Products" IS: 16106-2012 "Method of Electrical and Photometric solid state lighting (LED) Products" IS: 16105-2012 "Method of measurement of Lumen maintenance of solid state light sources" 		
Enclosures:			
Prepared By:	Prepared By: Approved By:		y:
Sanjay Sharma	Rajeev Chhabra		

HALONIX TECHNOLOGIES PRIVATE LIMITED HTPL LABORATORY (NABL Certificate No: TC-7634)

Plot-5, Sector-12, IIE, SIDCUL

Haridwar (Uttarakhand), PIN-249403, India

Contact:

Email: customercare@halonix.co.in

Fax:

Web: http://www.halonix.co.in

Electrical & Photometric Test Report

Photometric Test Report: (As Per	r IES LM 79-08)				
Sample ID: 08-03-2019 -001					
Catalogue Reference:	HLLL-01-18-CV	V	Testing Date:	08-03-2019	
Testing Agency:	HTPL Laborato	ory	Brand:	HALONIX	
Equipment Used: EVERFINE Brand Gonio Photometer (Type: GO - 2000B V1) and Globe					
	Photometer (Type: PMS – 50/80) with Power Meter				
	10-100		0-04		

Ambient Temperature:	25±2°C	Relative Humidity:	65%
Test Voltage:	240V	Frequency:	50Hz
Stabilization Time:	30Min	Total Operating Time:	1.30Hours

Rated Performance Parameters:				
Rated Wattage :	18W	Rated Input Current:	0.092A	
Nomical CCT :	6500K	Nominal CRI:	>80	

Measured Electrical Parameters:				
Supply Voltage:	240V	Input Current :	0.077A	
Frequency:	50Hz			
Total Power :	17.91W	Power Factor :	0.969	

Photometric Measurement Data:			
Total Measured Lumen :	1819.48lm	Luminaries Efficacy:	101.59lm/W
CCT:	6395K	CRI:	82.5
Light Intensity Distribution: Attached (Refer to Page No. 4)		. 4)	
Approved By: Rajeev Chhabra	ved By: Rajeev Chhabra Tested By: Sanjay Sharma		

HALONIX TECHNOLOGIES PRIVATE LIMITED HTPL LABORATORY (NABL Certificate No: TC-7634)

Plot-5, Sector-12, IIE, SIDCUL

Haridwar (Uttarakhand), PIN-249403, India


Contact:

Email: customercare@halonix.co.in

Fax:

Web: http://www.halonix.co.in

Light intensity Distribution Diagram

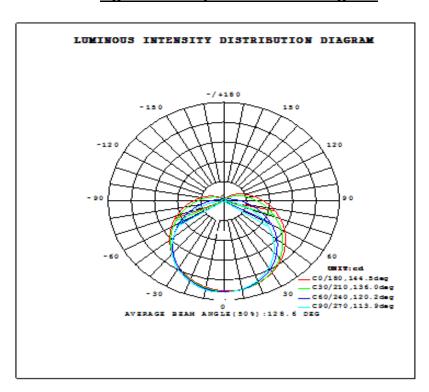

Catalogue Reference	HLLL-01-18-CW	Sample ID	08-03-2019 -001