

150W LED HW BAY LIGHT

Photometric & Electrical Measurement (As per IES LM 79-08 / IS 16106-12)

150W Energy Efficient LED Bay Light

Issued by: Halonix Technologies Private Limited (NABL Certification No: TC-7634) 10/18/2019

HALONIX TECHNOLOGIES PRIVATE LIMITED HTPL LABORATORY (NABL Certificate No: TC-7634)

Plot-5, Sector-12, IIE, SIDCUL

Haridwar (Uttarakhand), PIN-249403, India

Contact:

Email: customercare@halonix.co.in

Fax:

Web: http://www.halonix.co.in

Test Report

Report Number: 18-10-2019	9 -002		Date:	18-10-2019
Product Description: 150W Energy Efficient LED Bay Light				
Product Catalogue Reference:	HLBLD-ML07-150-CWL-	R-60D-HL2	Brand:	HALONIX
Construction:				
Pressure die casted aluminum housing,	Glass front visor, SMD L	ED, Electronic driver	etc.	
Test Details:		Document	References	s/Standard:
 Light intensity distribution Measurement Total Lumen output Measurement Electrical Parameters Measurement 		 IES-LM-79-08 "Electrical and Photometric Measurements of Solid-State Lighting Products" IS: 16106-2012 "Method of Electrical and Photometric solid state lighting (LED) Products" IS: 16105-2012 "Method of measurement of Lumen maintenance of solid state light sources" 		
Enclosures:				
Prepared By:	Prepared By: Approved By:		y:	
Sanjay Sharma		Ra	jeev Chhal	ora

HALONIX TECHNOLOGIES PRIVATE LIMITED HTPL LABORATORY (NABL Certificate No: TC-7634)

Plot-5, Sector-12, IIE, SIDCUL

Haridwar (Uttarakhand), PIN-249403, India

Contact:

Email: customercare@halonix.co.in

Fax:

Web: http://www.halonix.co.in

Electrical & Photometric Test Report

Photometric Test Report: (As Per IES LM 79-08)					
Sample ID: 18-10-2019 -002					
Catalogue Reference:	HLBLD-ML07-150-CWL-R-60D-HL2	Testing Date:	18-10-2019		
Testing Agency:	HTPL Laboratory	Brand:	HALONIX		
Equipment Used:	EVERFINE Brand Gonio Photometer (Type: GO - 2000B V1) and Globe				
	Photometer (Type: PMS – 50/80) with Power Meter				

Ambient Temperature:	25±2°C	Relative Humidity:	65%
Test Voltage:	240V	Frequency:	50Hz
Stabilization Time:	30Min	Total Operating Time:	1.30Hours

Rated Performance Parameters:			
Rated Wattage :	150W	Rated Input Current:	0.691A
Nomical CCT :	5700K	Nominal CRI:	>70

Measured Electrical Parameters:			
Supply Voltage:	240V	Input Current :	0.637A
Frequency:	50Hz		
Total Power :	149.65W	Power Factor :	0.979

Photometric Measurement Data:			
Total Measured Lumen :	18163.02lm	Luminaries Efficacy:	121.37lm/W
CCT:	5771K	CRI:	72.1
Light Intensity Distribution:		Attached (Refer to Page No. 4)	
Approved By: Rajeev Chhabra		Tested By: Sanjay Sharma	

HALONIX TECHNOLOGIES PRIVATE LIMITED HTPL LABORATORY (NABL Certificate No: TC-7634)

Plot-5, Sector-12, IIE, SIDCUL

Haridwar (Uttarakhand), PIN-249403, India


Contact:

Email: customercare@halonix.co.in

Fax:

Web: http://www.halonix.co.in

Light intensity Distribution Diagram

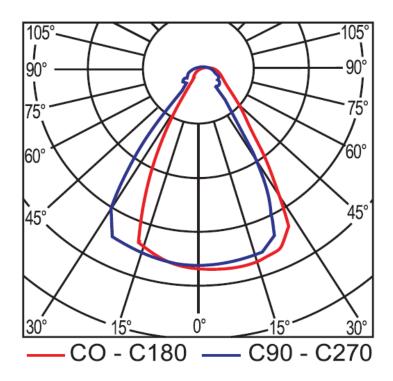

Catalogue Reference	HLBLD-ML07-150-CWL-R-60D-HL2	Sample ID	18-10-2019 -002