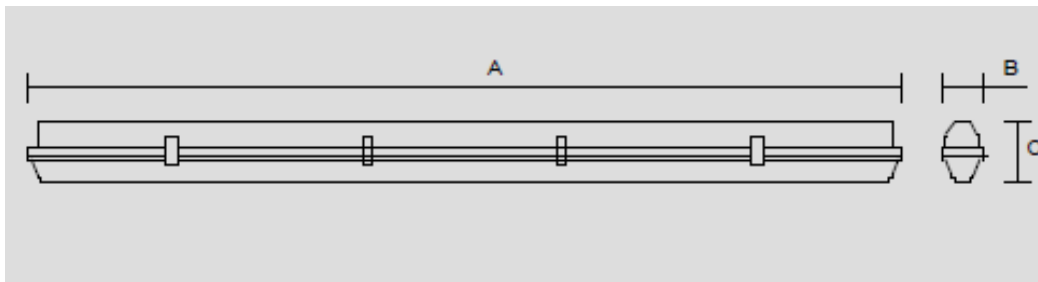


**Antirust Batten with Tube****HIJ02 220 T8 LED WT HL1**As per IS 10322 & IEC 60598-1**Product Description:** Antirust LED Batten with 2 nos Aluminium T8 Tubelight 20W**Technical Specifications:**

Main Housing and cover:	Poly carbonate
Lamp:	T8 LED TUBELIGHT 20W with 120 lm/w
Lamp holder:	Rotary, G13 lamp holder
Internal Wiring:	Single strand PVC insulated Cu wire
Hardwares:	MS Zinc plated and passivated
Ingress Protection:	IP65

**GA Drawing:**All dimensions in mm (Tolerance:  $\pm 5\text{mm}$ )**Electrical & Photometry Parameters:**

Rated Voltage & Frequency	System Wattage	System Current	Power Factor	System Lumen Efficacy	CCT (As per ANSI)	CRI	THD	Driver Efficiency
240V, 50Hz	2Nos.x20W $\pm 10\%$	<193mA	$\geq 0.95$	$\geq 110\text{lm/W}$	6500K	$\geq 80$	$\leq 15\%$	$\geq 85\%$

**System Protections:**

Open &amp; Short circuit protection, reverse polarity protection, surge protection of 3KV internal.

**Application:**

MES, industries, offices, hospitals, retails, railway, institutions, banks, etc.

**Mounting:**

Surface or Pendent mounting.

Note: Due to continuous efforts in developing products, improvement M/s Halonix Technologies Pvt Ltd reserves the right to make changes in the design and data and withdraw the luminaries without any prior notice.

Prepared by :

MK./NK

Industrial Luminaire :

Checked by :

AS

Cat. Ref. : HIJ02 218 T8 LED WT HL1

Approved by :

RL

Document No : BRE-2019

As improvement in design & method of manufacturing is a continuous process, the product supplied may differ in details from above given data.