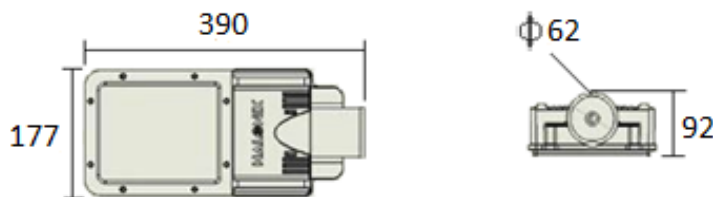


**LED 60W HW Street Light****HLSLD-10-60-CWL-I**

As per IS 10322 (Part-5/Sec-3) &amp; IEC 60598-1

**Product Description:** Energy efficient 60W LED Street Light**Technical Specifications:**

Housing Material:	Aluminum PDC, Top maintainable
Front Cover:	Clear toughened glass
Lens:	Suitable high efficient secondary lens
LED:	LM80 certified LED
LED Lumen Maintenance:	50,000 hours @ L70
Control Gear:	Isolated, Electronic, CC driver
Internal Wiring:	Insulated Cu wire
Hardware:	SS & MS Zinc plated and passivated
Ingress Protection:	IP66
Impact Resistance:	IK05
Operating Voltage:	140V~270V
Operating Temperature:	-10°C~ 50°C

**GA Drawing:**All dimensions in mm (Tolerance:  $\pm 5$ mm)**Electrical & Photometry Parameters:**

Rated Voltage & Frequency	System Wattage	System Current	Power Factor	System Lumen Efficacy	CCT (As per ANSI)	CRI	THD	Driver Efficiency
240V, 50Hz	60W $\pm 10\%$	<289mA	$\geq 0.95$	$\geq 100\text{lm/W}$	5700K	$\geq 70$	$\leq 10\%$	$\geq 85\%$

**System Protections:**Open & Short circuit protection, reverse polarity protection, high voltage cut off at 300V $\pm 10$ V, surge protection of 5KV internal+ 10KV SPD external.**Application:**

Street and road lighting, city squares, periphery lighting, complex boundary lighting, outdoor lighting, etc.

**Mounting:**

Pole mounting, suitable up to 60mm pipe bracket.

Note: Due to continuous efforts in developing products, improvement M/s Halonix Technologies Pvt. Ltd. reserves the right to make changes in the design and data and withdraw the luminaires without any prior notice.	Prepared by :	MK/NK	Industrial Luminaire :
	Checked by :	AS	Cat. Ref. : HLSLD-10-60-CWL-I
	Approved by :	RL	Document No : KON-2019

*As improvement in design & method of manufacturing is a continuous process, the product supplied may differ in details from above given data.*