

50W LED HW STREET LIGHT

Photometric & Electrical Measurement (As per IES LM 79-08 / IS 16106-12)

50W Energy Efficient LED Street Light

Issued by: Halonix Technologies Private Limited (NABL Certification No: TC-7634) 01/22/2019

HALONIX TECHNOLOGIES PRIVATE LIMITED HTPL LABORATORY (NABL Certificate No: TC-7634)

Plot-5, Sector-12, IIE, SIDCUL

Haridwar (Uttarakhand), PIN-249403, India

Contact:

Email: customercare@halonix.co.in

Fax:

Web: http://www.halonix.co.in

Test Report

Report Number: 22-01-2019 -001		Date:	22-01-2019	
Product Description: 50W Energy Efficient LED Street Light				
Product Catalogue Reference:		Brand:	HALONIX	
Construction:	CMD LED EL			
Pressure die casted aluminum housing, Glass front visor	, SMD LED, Electronic driver (etc.		
Test Details:	Document F	Document References/Standard:		
 Light intensity distribution Measurement Total Lumen output Measurement Electrical Parameters Measurement 	Measurements of Products" IS: 16106-2012 Photometric solit Products" IS: 16105-2012	 IES-LM-79-08 "Electrical and Photometric Measurements of Solid-State Lighting Products" IS: 16106-2012 "Method of Electrical and Photometric solid state lighting (LED) Products" IS: 16105-2012 "Method of measurement of Lumen maintenance of solid state light 		
Enclosures:				
Prepared By:	Aj	Approved By:		
Sanjay Sharma	Raj	Rajeev Chhabra		

HALONIX TECHNOLOGIES PRIVATE LIMITED HTPL LABORATORY (NABL Certificate No: TC-7634)

Plot-5, Sector-12, IIE, SIDCUL

Haridwar (Uttarakhand), PIN-249403, India

Contact:

Email: customercare@halonix.co.in

Fax:

Web: http://www.halonix.co.in

Electrical & Photometric Test Report

Photometric Test Report: (As Pe	r IES LM 79-08)					
Sample ID: 22-01-2019 -001						
Catalogue Reference:			Testing Date:	22-01-2019		
Testing Agency:	HTPL Laborat	HTPL Laboratory		HALONIX		
Equipment Used:	EVERFINE Bra	EVERFINE Brand Gonio Photometer (Type: GO - 2000B V1) and Globe				
	Photometer	Photometer (Type: PMS – 50/80) with Power Meter				
Ambient Temperature:	25±2°C	Relative Humidity:	65%			
Test Voltage:	240V	Frequency:	50Hz			
Stabilization Time:	30Min	Total Operating Time:	1.30Hours			
Rated Performance Parameters:						
Rated Wattage :	50W	Rated Input Current:	0.241A			
Nomical CCT :	5700K	Nominal CRI:	>70			
Measured Electrical Parameters:						
Supply Voltage:	240V	Input Current :	0.213A			
Frequency:	50Hz					
Total Power :	49.95W	Power Factor :	0.977			
Photometric Measurement Data:						
Total Measured Lumen:	5053.44lm	Luminaries Efficacy:	101.17lm/W			
сст :	5801K	CRI:	71.2			
Light Intensity Distribution:	nsity Distribution: Attached (Refer to Page No. 4)		No. 4)			
Approved By: Rajeev Chhabra		Tested By: Sanjay Sharma				

HALONIX TECHNOLOGIES PRIVATE LIMITED HTPL LABORATORY (NABL Certificate No: TC-7634)

Plot-5, Sector-12, IIE, SIDCUL

Haridwar (Uttarakhand), PIN-249403, India


Contact:

Email: customercare@halonix.co.in

Fax:

Web: http://www.halonix.co.in

Light intensity Distribution Diagram

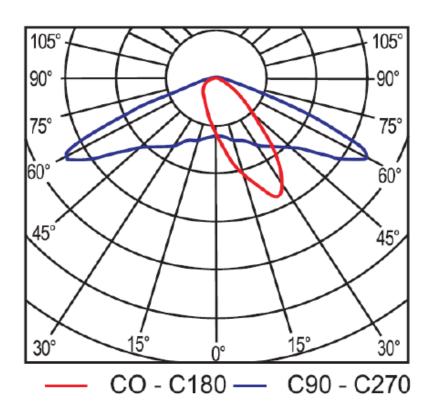

Catalogue Reference	Sample ID	22-01-2019 -001