

### **48W LED CLEAN ROOM LIGHT CW**

Photometric & Electrical Measurement (As per IES LM 79-08 / IS 16106-12)

**48W Energy Efficient LED Light** 

Issued by: Halonix Technologies Private Limited (NABL Certification No: TC-7634) 07/06/2019

# HALONIX TECHNOLOGIES PRIVATE LIMITED HTPL LABORATORY (NABL Certificate No: TC-7634)

Plot-5, Sector-12, IIE, SIDCUL

Haridwar (Uttarakhand), PIN-249403, India

Contact:

Email: customercare@halonix.co.in

Fax:

Web: http://www.halonix.co.in

### **Test Report**

<b>Report Number:</b> 06-07-2019 -001	•		Date:	06-07-2019
<b>Product Description:</b> 48W Energy Efficient LED Clean Room Light				
Product Catalogue Reference: HLC	R22-B001-48-CW		Brand:	HALONIX
Construction: CRCA housing, PMMA diffuser, etc.				
Test Details:		Document	Reference	s/Standard:
<ul> <li>Light intensity distribution Measurement</li> <li>Total Lumen output Measurement</li> <li>Electrical Parameters Measurement</li> </ul>		<ul> <li>IES-LM-79-08 "Electrical and Photometric Measurements of Solid-State Lighting Products"</li> <li>IS: 16106-2012 "Method of Electrical and Photometric solid state lighting (LED) Products"</li> <li>IS: 16105-2012 "Method of measurement of Lumen maintenance of solid state light sources"</li> </ul>		
Enclosures:				
Prepared By:		A	pproved B	y:
Sanjay Sharma		Rajeev Chhabra		

# HALONIX TECHNOLOGIES PRIVATE LIMITED HTPL LABORATORY (NABL Certificate No: TC-7634)

Plot-5, Sector-12, IIE, SIDCUL

Haridwar (Uttarakhand), PIN-249403, India

Contact:

Email: customercare@halonix.co.in

Fax:

Web: http://www.halonix.co.in

#### **Electrical & Photometric Test Report**

D	11470.00)			
Photometric Test Report: (As Per IES	LM 79-08)			
Sample ID: 06-07-2019 -001				
Catalogue Reference:	HLCR22-BO01-48-CW		<b>Testing Date:</b>	06-07-2019
Testing Agency:	HTPL Laborato	HTPL Laboratory		HALONIX
Equipment Used:	EVERFINE Brand Gonio Photometer (Type: GO - 2000B V1) and Globe			
	Photometer (Type: PMS – 50/80) with Power Meter			
Ambient Temperature:	25±2°C	Relative Humidity:	65%	
Test Voltage:	240V	Frequency:	50Hz	
Stabilization Time:	30Min	<b>Total Operating Time:</b>	1.30Hours	

Rated Performance Parameters:				
Rated Wattage :	48W	Rated Input Current:	0.232A	
Nomical CCT :	6500K	Nominal CRI:	>80	

Measured Electrical Parameters:				
Supply Voltage:	240V	Input Current :	0.204A	
Frequency:	50Hz			
Total Power :	47.91W	Power Factor :	0.979	

Photometric Measurement Data:				
Total Measured Lumen :	4844.66lm	Luminaries Efficacy:	101.12lm/W	
CCT:	6351K	CRI:	81.5	
Light Intensity Distribution:		Attached (Refer to Page No. 4)		
Approved By: Rajeev Chhabra		Tested By: Sanjay Sharma		

### HALONIX TECHNOLOGIES PRIVATE LIMITED HTPL LABORATORY (NABL Certificate No: TC-7634)

Plot-5, Sector-12, IIE, SIDCUL

Haridwar (Uttarakhand), PIN-249403, India


Contact:

Email: customercare@halonix.co.in

Fax:

Web: http://www.halonix.co.in

#### **Light intensity Distribution Diagram**

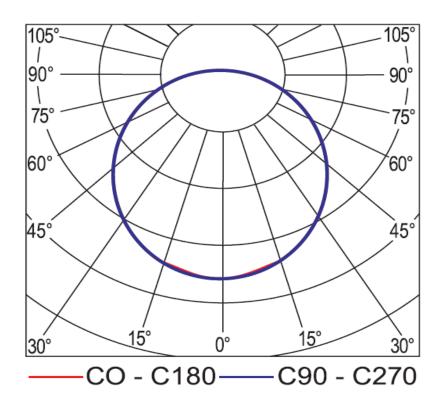

Catalogue Reference	HLCR22-BO01-48-CW	Sample ID	06-07-2019 -001