

36W 2'X2' LED PANEL LIGHT CW

Photometric & Electrical Measurement (As per IES LM 79-08 / IS 16106-12)

36W Energy Efficient LED Light

Issued by: Halonix Technologies Private Limited (NABL Certification No: TC-7634) 02/21/2019

HALONIX TECHNOLOGIES PRIVATE LIMITED HTPL LABORATORY (NABL Certificate No: TC-7634)

Plot-5, Sector-12, IIE, SIDCUL

Haridwar (Uttarakhand), PIN-249403, India

Contact:

Email: customercare@halonix.co.in

Fax:

Web: http://www.halonix.co.in

Test Report

Report Number: 21-02-201	9 -001		Date:	21-02-2019
Product Description: 36W Energy Efficient 2'X2' LED Panel				
Product Catalogue Reference:	HLFPU22-02-36-CW		Brand:	HALONIX
Construction: Aluminum housing, PC/PMMA diffuser	r, etc.			
Test Details:		Document	Reference	s/Standard:
 Light intensity distribution Measurement Total Lumen output Measurement Electrical Parameters Measurement 		 IES-LM-79-08 "Electrical and Photometric Measurements of Solid-State Lighting Products" IS: 16106-2012 "Method of Electrical and Photometric solid state lighting (LED) Products" IS: 16105-2012 "Method of measurement of Lumen maintenance of solid state light sources" 		
Enclosures:				
Prepared By:		A	pproved B	y:
Sanjay Sharma		Rajeev Chhabra		

HALONIX TECHNOLOGIES PRIVATE LIMITED HTPL LABORATORY (NABL Certificate No: TC-7634)

Plot-5, Sector-12, IIE, SIDCUL

Haridwar (Uttarakhand), PIN-249403, India

Contact:

Email: customercare@halonix.co.in

Fax:

Web: http://www.halonix.co.in

Electrical & Photometric Test Report

Photometric Test Report: (As Per	IES LM 79-08)				
Sample ID: 21-02-2019 -001					
Catalogue Reference:	HLFPU22-02-36-CW	Testing Date:	21-02-2019		
Testing Agency:	HTPL Laboratory	Brand:	HALONIX		
Equipment Used: EVERFINE Brand Gonio Photometer (Type: GO - 2000B V1) and Globe					
	Photometer (Type: PMS – 50/80) with Power Meter				
A	25,200 5,421 - 11 - 241	CE0/			

Ambient Temperature:	25±2°C	Relative Humidity:	65%
Test Voltage:	240V	Frequency:	50Hz
Stabilization Time:	30Min	Total Operating Time:	1.30Hours

Rated Performance Parameters:			
Rated Wattage :	36W	Rated Input Current:	0.174A
Nomical CCT :	6500K	Nominal CRI:	>80

Measured Electrical Parameters:				
Supply Voltage:	240V	Input Current :	0.152A	
Frequency:	50Hz			
Total Power :	35.87W	Power Factor :	0.983	

Photometric Measurement Data:			
Total Measured Lumen :	2973.98lm	Luminaries Efficacy:	82.91lm/W
CCT:	6441K	CRI:	82.6
Light Intensity Distribution:		Attached (Refer to Page No. 4)	
Approved By: Rajeev Chhabra		Tested By: Sanjay Sharma	

HALONIX TECHNOLOGIES PRIVATE LIMITED HTPL LABORATORY (NABL Certificate No: TC-7634)

Plot-5, Sector-12, IIE, SIDCUL

Haridwar (Uttarakhand), PIN-249403, India


Contact:

Email: customercare@halonix.co.in

Fax:

Web: http://www.halonix.co.in

Light intensity Distribution Diagram

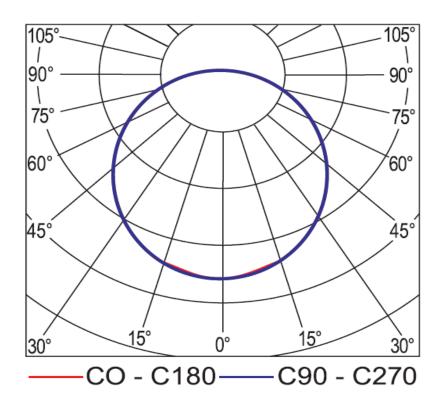

Catalogue Reference	HLFPU22-02-36-CW	Sample ID	21-02-2019 -001