

10W LED BATTEN CW

Photometric & Electrical Measurement (As per IES LM 79-08 / IS 16106-12)

10W Energy Efficient LED Light

Issued by: Halonix Technologies Private Limited (NABL Certification No: TC-7634) 01/11/2019

HALONIX TECHNOLOGIES PRIVATE LIMITED HTPL LABORATORY (NABL Certificate No: TC-7634)

Plot-5, Sector-12, IIE, SIDCUL

Haridwar (Uttarakhand), PIN-249403, India

Contact:

Email: customercare@halonix.co.in

Fax:

Web: http://www.halonix.co.in

Test Report

Report Number: 11-01-2019 -001	Date:	11-01-2019	
Product Description: 10W Energy Efficient LED Batten			
Product Catalogue Reference: HLB-03-10-CW-AL	Brand:	HALONIX	
Construction: Aluminum housing, PC diffuser, etc.			
Test Details:	Document References	s/Standard:	
 Light intensity distribution Measurement Total Lumen output Measurement Electrical Parameters Measurement 	 IES-LM-79-08 "Electrical and Photometric Measurements of Solid-State Lighting Products" IS: 16106-2012 "Method of Electrical and Photometric solid state lighting (LED) Products" IS: 16105-2012 "Method of measurement of Lumen maintenance of solid state light sources" 		
Enclosures:			
Prepared By:	Approved By:		
Sanjay Sharma	Rajeev Chhabra		

HALONIX TECHNOLOGIES PRIVATE LIMITED HTPL LABORATORY (NABL Certificate No: TC-7634)

Plot-5, Sector-12, IIE, SIDCUL

Haridwar (Uttarakhand), PIN-249403, India

Contact:

Email: customercare@halonix.co.in

Fax:

Web: http://www.halonix.co.in

Total Measured Lumen:

Light Intensity Distribution:

Approved By: Rajeev Chhabra

CCT:

Electrical & Photometric Test Report

Photometric Test Report: (As F	Per IES LM 79-08)				
Sample ID: 11-01-2019 -001					
Catalogue Reference:	HLB-03-10-	HLB-03-10-CW-AL		11-01-2019	
Testing Agency:	HTPL Labor	HTPL Laboratory		HALONIX	
Equipment Used:	EVERFINE B	EVERFINE Brand Gonio Photometer (Type: GO - 2000B V1) and Globe Photometer (Type: PMS – 50/80) with Power Meter			
	Photomete				
Ambient Temperature:	25±2°C	Relative Humidity:	65%		
Test Voltage:	240V	Frequency:	50Hz		
Stabilization Time:	30Min	30Min Total Operating Time:		1.30Hours	
	-		-		
Rated Performance Parameters:					
Rated Wattage :	10W	Rated Input Current:	0.051A		
Nomical CCT :	6500K	Nominal CRI:	>80		
		•			
Measured Electrical Parameters	:				
Supply Voltage:	240V	Input Current :	0.042A		
Frequency:	50Hz				
Total Power :	9.85W	Power Factor :	0.977		
	,	•			
Photometric Measurement Data	n:				

1007.16lm

6471K

Luminaries Efficacy:

Attached (Refer to Page No. 4) **Tested By:** Sanjay Sharma

CRI:

102.25lm/W

HALONIX TECHNOLOGIES PRIVATE LIMITED HTPL LABORATORY (NABL Certificate No: TC-7634)

Plot-5, Sector-12, IIE, SIDCUL

Haridwar (Uttarakhand), PIN-249403, India


Contact:

Email: customercare@halonix.co.in

Fax:

Web: http://www.halonix.co.in

Light intensity Distribution Diagram

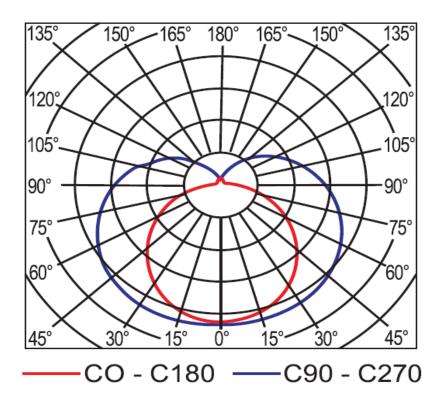

Catalogue Refe	rence	HLB-03-10-CW-AL	Sample ID	11-01-2019 -001