Imbera®

VERTICAL COOLER
FVC20

ESTABLISHING A NEW STANDARD IN THE COMERCIAL REFRIGERATION INDUSTRY

Wide and versatile cooler, its four doors allow easy access to the interior. Ideal for head of gondola, with improved capacity and excellent visibility of the product at the point of sale due to its NGD doors.



KEY FEATURES



ECO-FRIENDLY HC NATURAL REFRIGERANT

New R290 HFC-free refrigerant gas that reduces environmental impact and increases efficiency.



NEWLY DESIGNED CONDENSER

New condenser featuring a joints reduction down to zero increasing long term refrigeration reliability and safeguarding against any system leaks.




ELECTRONIC TEMPERATURE CONTROLLER

Electronic controller assures optimal refrigeration performance through precision temperature control, and intelligent control for defrost cycle, compressor & other component functions.



ELECTRONIC FAN MOTORS

Enhances performance and efficiency. Uses only a fraction of the energy and offers longer life expectancy than industry standard shaded-pole motors.



LED EFFICIENCY +220 LUX MINIMUM OUTPUT

New 5th generation constant power ultra-high efficiency LED uses lowest energy possible, with highest light output.



SPARK-FREE REFRIGERATION COMPONENTS

All HC models will have spark free refrigeration components for optimal safety, per UL requirements.

DOE

1925 Shiloh Road, Building #2 Kennesaw, GA 30144 678-504-6835 I www.imberacooling.com

Imbera

VERTICAL COOLER
FVC20

TECHNICAL SPECIFICATIONS

Exterior dimensions	Internal dimensions	Usable interior capacity
H: 55 1/5" (140cm)	H: 44 9/10"(114cm)	H: 44 9/10"(114cm)
W: 36 3/10"(92cm)	W: 28 1/2" (73cm)	W: 27 1/2" (70cm)
D: 31 3/10"(79cm)	D: 26" (66cm)	D: 18 3/10"(46cm)

Usable volume	13.06 ft³ (369.74 lts)
Doors	4
Door construction	Plastic frame
Shelves	4
Shelf size	W: 28" (71cm) D: 20 1/10"(51cm)
External material	Pre-painted steel
Internal material	Pre-painted steel


DATA CAPACITY**

355 ml (12 oz) can capacity


Total:	303
Front:	11
Display:	44

PRODUCT VIEWS


Front view

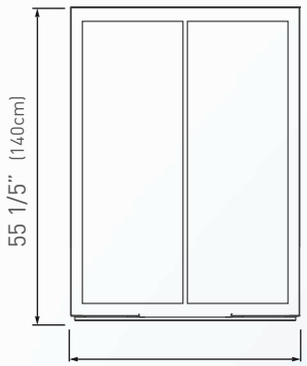

Side view

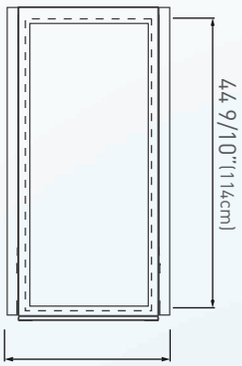

Top view



REFRIGERATION PERFORMANCE DATA

Refrigerant	R290 2.2oz (0.062 kg)	
Energy consumption	2.643 kwh / 24 h	
Compressor power	1/5 HP 222 watts	
Condenser	Finless	
Thermostat setting default	Cut-out 32°F (0°C)	Cut-in 44.6°F (7°C)

ELECTRICAL DATA

Power supply	115V / 60 Hz
Amps	3.1
Length of cord	118" (300cm)
Lighting	16 modules 96 total LED's
Plug type	NEMA 5-15P
Controller	ETC1H

LOGISTIC DATA

Trailer loads	20': 12 40': 28 53': 36
Unit weight w/packaging	339.51 lb (154kg)
Dimensions w/packaging	H: 56 4/5" (144cm) W: 37" (94cm) D: 33 2/5" (85cm)

*Energy consumption based on C condition
*BMAD System (Low maintenance high performance)
*Dimensions rounded up to the nearest inch or millimeter
*Specifications subject to change without notice
*H: Heigth, W: Width, D: Depth
**Product capacity expressed at its highest level

Customer service and warranty

Operators must follow installation and operational guidelines per Imbera Users Manual
Each cooler must be connected directly to a single power supply, otherwise warranty will be voided

11/09/2020