Imbera®

Vertical Cooler VR08

ESTABLISHING A NEW STANDARD IN THE COMMERCIAL REFRIGERATION INDUSTRY

Energy efficient, eco-friendly HC refrigerant with low charge, spark-free components, and the lowest utility costs in its category.



KEY FEATURES



ECO-FRIENDLY HC NATURAL REFRIGERANT

New R290 HFC-free refrigerant gas that reduces environmental impact and increases efficiency.



NEWLY DESIGNED CONDENSER

New condenser featuring a joints reduction down to zero increasing long term refrigeration reliability and safeguarding against any system leaks.



ELECTRONIC TEMPERATURE CONTROLLER

Electronic controller assures optimal refrigeration performance through precision temperature control, and intelligent control for defrost cycle, compressor & other component functions.



ELECTRONIC FAN MOTORS

Enhances performance and efficiency. Uses only a fraction of the energy and offers longer life expectancy than industry standard shaded-pole motors.



LED EFFICIENCY +220 LUX MINIMUM OUTPUT

New 5th generation constant power ulta-high efficiency LED uses lowest energy possible, with highest light output.



SPARK-FREE REFRIGERATION COMPONENTS

All HC models will have spark free refrigeration components for optimal safety, per UL requirements.

1925 Shiloh Road, Building #2 Kennesaw, GA 30144 678-504-6835 I www.imberacooling.com

Imbera®

Vertical Cooler
VR08

TECHNICAL SPECIFICATIONS

Exterior dimensions	Internal dimensions	Usable int. capacity
H: 71 7/9" (182cm)	H: 53" (135cm)	H: 44 7/8" (114cm)
W: 20 1/4" (51cm)	W: 15 6/7" (40cm)	W: 14 7/8" (38cm)
D: 22 3/5" (57cm)	D: 16 2/3" (42cm)	D: 14" (36cm)

Usable volume	5.55 ft³ (157.28 lts)
Doors	1
Door construction	Plastic frame
Shelves	5
Shelf size	W: N/A D: N/A
External material	Pre-painted steel
Internal material	Pre-painted steel

CAPACITY DATA

20 oz (590 ml) bottle capacity

Total:	125
Front:	5
Display:	25

12 oz (350 ml) can capacity

Total:	125
Front:	5
Display:	25

REFRIGERATION PERFORMANCE DATA

Refrigerant	R600 1.58oz (0.045 kg)
Energy consumption	1.15 kwh / 24 h
Compressor power	1/8 HP 115 watts
Condenser	Dynamic
Thermostat setting default	Cut-out Cut-in 32°F (0°C) 44.6°F (7°C)

ELECTRICAL DATA


Power supply	115V / 60 Hz
Amps	1.8
Length of cord	118" (300cm)
Lighting	N/A
Plug type	N/A
Controller	ETC1H

LOGISTIC DATA

Trailer loads	20': 40 40': 84 53': 112
Unit weight w/packaging	181.99 lb (82.55 kg)
Dimensions w/packaging	H: 75" (191cm) W: 21 3/4" (55cm) D: 22 4/9" (57cm)

PRODUCT VIEWS

Front view

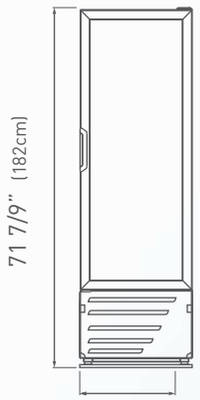


20 1/4" (51cm)

Side view



22 3/5" (57cm)

Top view



*BMAD System (Low maintenance high performance)
*Dimensions rounded up to the nearest inch or centimeter
*Images for reference only.

*Specifications subject to change without notice
*H: Heigth, W: Width, D: Depth

Customer service and warranty

- Three year limited warranty, includes parts and labor
- An additional two year warranty is issued on the compressor (USA & Canada only)
- Operators must follow installation and operational guidelines per Imbera Users Manual
- Each cooler must be connected directly to a single power supply, otherwise warranty will be voided
- Customer service: 866.548.5770