Imbera®

# VERTICAL COOLER
# EVC1.5

## ESTABLISHING A NEW STANDARD IN THE COMMERCIAL REFRIGERATION INDUSTRY

Energy efficient, environmentally friendly, featuring spark-free components, low refrigerant charge and the most attractive product display.



## KEY FEATURES



### ECO-FRIENDLY HC NATURAL REFRIGERANT

New R290 HFC-free refrigerant gas that reduces environmental impact and increases efficiency.



### NEWLY DESIGNED CONDENSER

New condenser featuring a joints reduction down to zero increasing long term refrigeration reliability and safeguarding against any system leaks.




### ELECTRONIC TEMPERATURE CONTROLLER

Electronic controller assures optimal refrigeration performance through precision temperature control, and intelligent control for defrost cycle, compressor & other component functions.



### ELECTRONIC FAN MOTORS

Enhances performance and efficiency. Uses only a fraction of the energy and offers longer life expectancy than industry standard shaded-pole motors.



### LED EFFICIENCY +220 LUX MINIMUM OUTPUT

New 5th generation constant power ultra-high efficiency LED uses lowest energy possible, with highest light output.



### SPARK-FREE REFRIGERATION COMPONENTS

All HC models will have spark free refrigeration components for optimal safety, per UL requirements.

UL DOE ENERGY STAR

1925 Shiloh Road, Building #2 Kennesaw, GA 30144 678-504-6835 I www.imberacooling.com

# Imbera

# VERTICAL COOLER
# EVC1.5

## TECHNICAL SPECIFICATIONS

| Exterior dimensions | Internal dimensions | Usable interior capacity |
|---|---|---|
| H: 29 1/2" | H: 23 5/8" | H: 23 5/8" |
| W: 14 1/8" | W: 10 7/8" | W: 9 7/8" |
| D: 18 7/8" | D: 12 3/8" | D: 11 1/8" |

| | |
|---|---|
| Usable volume | 1.86 ft³ |
| Doors | 1 |
| Door construction | Plastic frame |
| Shelves | 2 |
| Shelf size | W: 9 7/8"<br>D: 11 1/8" |
| External material | Pre-painted steel |
| Internal material | Pre-painted steel |

## DATA CAPACITY**

8 oz can capacity

Total: 48

Facings per shelf: 4

Total facings: 12

## REFRIGERATION PERFORMANCE DATA

| | | |
|---|---|---|
| Refrigerant | R600 0.7oz | |
| Energy consumption | 0.489 kwh / 24 h | |
| Compressor power | 1/10 HP 56.3 watts | |
| Condenser | Static | |
| Thermostat setting default | Cut-out 32°F | Cut-in 44.6°F |

## ELECTRICAL DATA


| | |
|---|---|
| Power supply | 115V / 60 Hz |
| Amps | 1.7 |
| Length of cord | 128" |
| Lighting | 2 modules 12 total LED's |
| Plug type | NEMA 5-15P |
| Controller | ETC1H |

## LOGISTIC DATA


| | |
|---|---|
| Trailer loads | 20': 96<br>40': 210<br>53': 284 |
| Unit weight w/packaging | 78.48 lb |
| Dimensions w/packaging | H: 33 1/4"<br>W: 17 3/8"<br>D: 23 3/2" |

## PRODUCT VIEWS


Front view

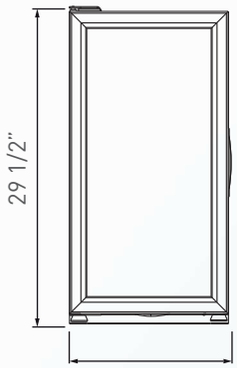


Side view

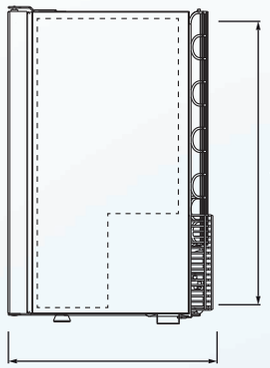


Top view




*Energy consumption based on C condition
*BMAD System (Low maintenance high performance)
*Dimensions rounded up to the nearest inch or millimeter
*Specifications subject to change without notice
*H: Heigth, W: Width, D: Depth
**Product capacity expressed at its highest level

**Customer service and warranty**

Operators must follow installation and operational guidelines per Imbera Users Manual
Each cooler must be connected directly to a single power supply, otherwise warranty will be voided

04/23/2021