Imbera

VERTICAL COOLER
VR11

ESTABLISHING A NEW STANDARD IN THE COMERCIAL REFRIGERATION INDUSTRY

Energy efficient, environmentally friendly, featuring spark-free components, low refrigerant charge and the most attractive product display



KEY FEATURES



ECO-FRIENDLY HC NATURAL REFRIGERANT

New R290 HFC-free refrigerant gas that reduces environmental impact and increases efficiency.



NEWLY DESIGNED CONDENSER

New condenser featuring a joints reduction down to zero increasing long term refrigeration reliability and safeguarding against any system leaks.



ELECTRONIC TEMPERATURE CONTROLLER

Electronic controller assures optimal refrigeration performance through precision temperature control, and intelligent control for defrost cycle, compressor & other component functions.



ELECTRONIC FAN MOTORS

Enhances performance and efficiency. Uses only a fraction of the energy and offers longer life expectancy than industry standard shaded-pole motors.



LED Efficiency +220 LUX MINIMUM OUTPUT

New 5th generation constant power ultra-high efficiency LED uses lowest energy possible, with highest light output.



SPARK-FREE REFRIGERATION COMPONENTS

All HC models will have spark free refrigeration components for optimal safety, per UL requirements

Imbera

VERTICAL COOLER
VR11

TECHNICAL SPECIFICATIONS

Exterior dimensions	Internal dimensions	Usable interior capacity
H: 54 5/8" (139 cm)	H: 50 1/4" (128 cm)	H: 45 7/8" (117 cm)
W: 25 3/8" (64 cm)	W: 21 7/8" (56 cm)	W: 20 7/8" (53 cm)
D: 24 7/8" (63 cm)	D: 18 7/8" (48 cm)	D: 16 3/4" (43 cm)

Usable volume	9.31 ft³ (263.65 lts)	
Doors	1	
Door construction	Plastic frame	
Shelves	5	
Shelf size	W: 20 7/8" (53 cm) D: 16 3/4" (43 cm)	W: 21 1/4" (54 cm) D: 6 3/4" (17 cm)
External material Internal material	Pre-painted steel Pre-painted steel	

DATA CAPACITY**

8 Oz (255 ml) bottle slim capacity

Total: 430

Front: 10

Depth: 8

Display: 60

REFRIGERATION PERFORMANCE DATA

Refrigerant	R-290 1.8 Oz. (0.050 kg)	
Energy consumption	1.976 kwh / 24 h	
Compressor power	1/6 HP 104 watts	
Condenser	Dynamic	
Thermostat setting default	Cut-out 32°F (0°C)	Cut-in 44.6°F (7°C)

ELECTRICAL DATA


Power supply	115 / 60 Hz
Amps	2.4 A
Length of cord	128" (327 cm)
Lighting	3 modules 56 totales LED´S
Plug type	NEMA 5-15P
Controller	ETC1H

LOGISTIC DATA


Trailer loads	20': 24 40': 51 53': 69
Unit weight w/packaging	196 Lb (88.8 kg)
Dimensions w/packaging	H: 58" (148cm) W: 27" (67cm) D: 26" (62 cm)

PRODUCT VIEWS


Front View

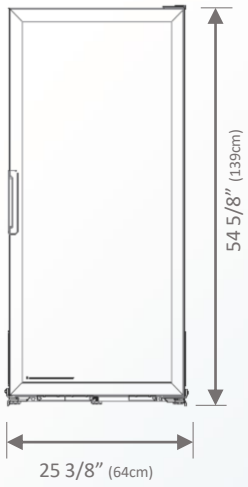

Side View

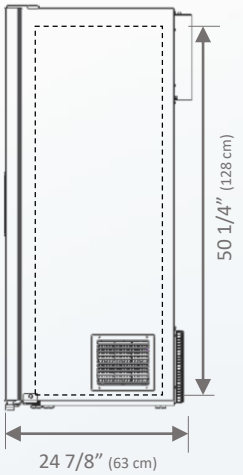

Top View

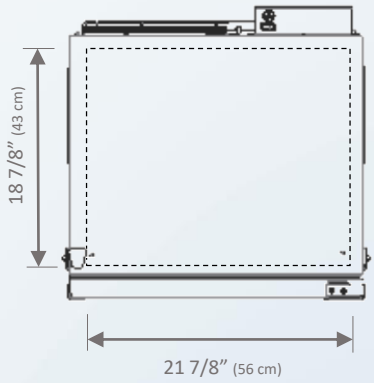

*Energy consumption based on C condition
*BMAD System (Low maintenance high performance)
*Dimensions rounded up to the nearest inch or millimeter
*Specifications subject to change without notice
*H: Heigth, W: Width, D: Depth
**Product capacity expressed at its highest level

Customer service and warranty

Operators must follow installation and operational guidelines per Imbera Users Manual

Each cooler must be connected directly to a single power supply, otherwise warranty will be voided

25/08/2023