Imbera


VERTICAL COOLER VR11

ESTABLISHING A NEW STANDARD IN THE COMERCIAL REFRIGERATION INDUSTRY

Energy efficient, eco-friendly HC refrigerant with low charge, spark-free components, and the lowest utility costs in it´s category.



KEY FEATURES



NEWLY DESIGNED CONDENSER

New condenser featuring a joints reduction down to zero increasing long term refrigeration reliability and safeguarding against any system leaks.



ELECTRONIC TEMPERATURE CONTROLLER

Electronic controller assures optimal refrigeration performance through precision temperature control, and intelligent control for defrost cycle, compressor & other component functions.



ELECTRONIC FAN MOTORS

Enhances performance and efficiency. Uses only a fraction of the energy and offers longer life expectancy than industry standard shaded-pole motors.



LED EFFICIENCY +220 LUX

Minimum Output

New 5th generation constant power ultra-high efficiency LED uses lowest energy possible, with highest light output.



SPARK-FREE REFRIGERATION COMPONENTS

All HC models will have spark free refrigeration components for optimal safety, per UL requirements.

C_5H_{10}

CYCLOPENTANE INSULATING FOAM

It is ecological since it does not contain CFCs or HFCs and it is a highly efficient insulator.



HC NATURAL REFRIGERANT

Alternative refrigerant gases that do not contain HFCs and therefore reduce environmental impact.

VERTICAL COOLER VR11

TECHNICAL SPECIFICATIONS

Exterior dimensions	Internal dimensions	Usable interior capacity
H: 54 7/8” W: 25 7/8” D: 25 1/8”	H: 50 1/4“ W: 21 7/8“ D: 18 7/8“	H: 35 7/8“ W: 20 7/8“ D: 16 3/4“

Usable volume	11.9 ft³ (336.97 lts)
Doors	1
Door construction	Plastic frame
Shelves	4
Shelf size	W: 20 7/8“ D: 17 3/8“
External material Internal material	Pre-painted steel Pre-painted steel

DATA CAPACITY**

8 oz can capacity	
Total:	292
Facings per shelf:	9
Total facings:	56

REFRIGERATION PERFORMANCE DATA

Refrigerant	R900 1.8 o.z	(0.050 kg)
Energy consumption	1.340 kwh / 24 h	
Compressor power	1/6 HP 104 watts	
Condenser	Dynamic	
Thermostat setting default	Cut-out 32°F (0°C)	Cut-in 44.6°F (7°C)

ELECTRICAL DATA


Power supply	115 V / 60 Hz
Amps	2.4 A
Length of cord	128”
Lighting	3 modules 56 totales LED´S
Plug type	B
Controller	ETC1H

LOGISTIC DATA


Trailer loads		20’: 24 40’: 51 53’: 69
Unit weight	w/packaging	H: 58 1/8“
Dimensions	w/packaging	W: 26 5/8“ D: 26 5/8“

PRODUCT VIEWS


Front view

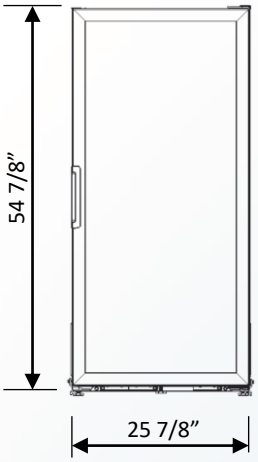

Side view

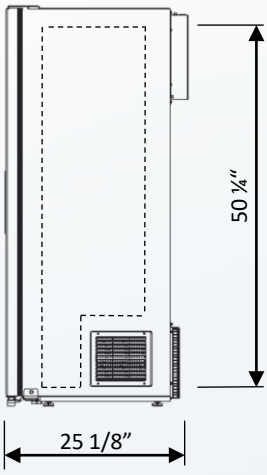

Top view



*Energy consumption based on C condition
*BMAD System (Low maintenance high performance)
*Dimensions rounded up to the nearest inch or millimeter
*Specifications subject to change without notice
*H: Heigth, W: Width, D: Depth
**Product capacity expressed at its highest level

Customer service and warranty
Operators must follow installation and operational guidelines per Imbera Users Manual
Each cooler must be connected directly to a single power supply, otherwise warranty will be voided

24/05/2023