
Imbera®

VERTICAL COOLER
VR27

ESTABLISHING A NEW STANDARD IN THE COMERCIAL REFRIGERATION INDUSTRY

Energy efficient, environmentally friendly, featuring spark-free components, low refrigerant charge and the most attractive product display.

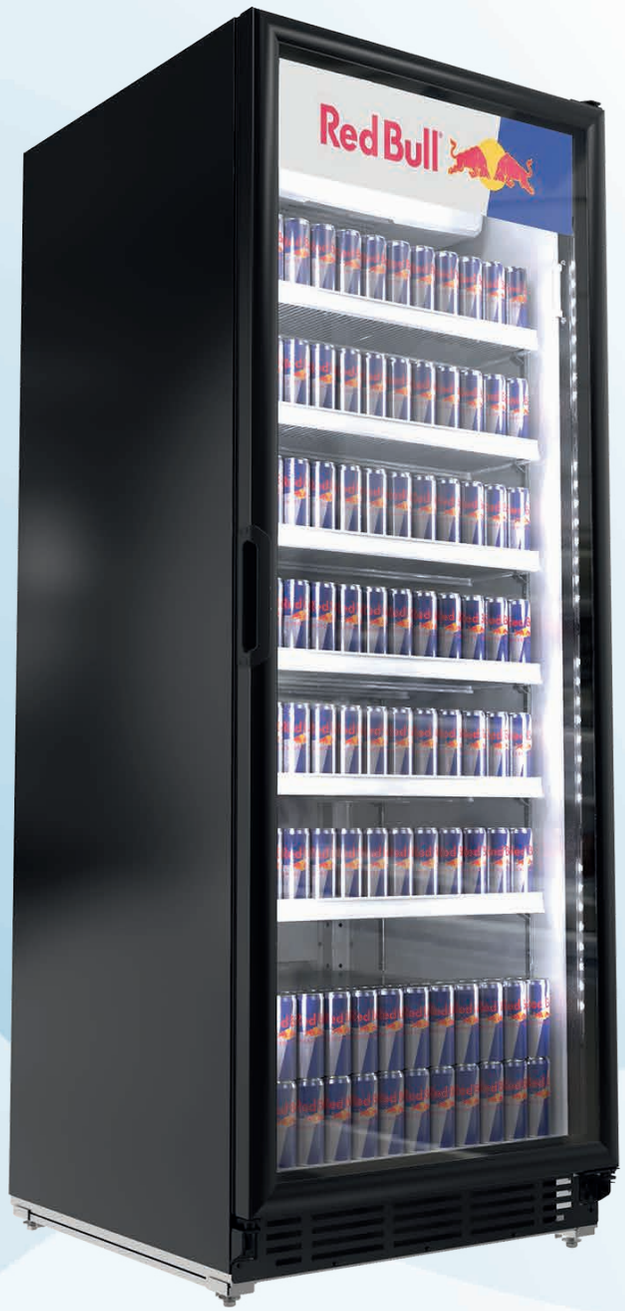

KEY FEATURES



ECO-FRIENDLY HC NATURAL REFRIGERANT

New R290 HFC-free refrigerant gas that reduces environmental impact and increases efficiency.



NEWLY DESIGNED CONDENSER

New condenser featuring a joints reduction down to zero increasing long term refrigeration reliability and safeguarding against any system leaks.



ELECTRONIC TEMPERATURE CONTROLLER

Electronic controller assures optimal refrigeration performance through precision temperature control, and intelligent control for defrost cycle, compressor & other component functions.



ELECTRONIC FAN MOTORS

Enhances performance and efficiency. Uses only a fraction of the energy and offers longer life expectancy than industry standard shaded-pole motors.



LED EFFICIENCY +220 LUX MINIMUM OUTPUT

New 5th generation constant power ultra-high efficiency LED uses lowest energy possible, with highest light output.



SPARK-FREE REFRIGERATION COMPONENTS

All HC models will have spark free refrigeration components for optimal safety, per UL requirements.

1925 Shiloh Road, Building #2 Kennesaw, GA 30144 678-504-6835 I www.imberacooling.com

VERTICAL COOLER
VR27

TECHNICAL SPECIFICATIONS

Exterior dimensions	Internal dimensions	Usable interior capacity
H: 79 1/10" (201cm)	H: 70 1/2" (179cm)	H: 63" (160cm)
W: 30" (76cm)	W: 26 7/10" (68cm)	W: 25 9/10" (66cm)
D: 33 7/10" (86cm)	D: 28" (71cm)	D: 23" (58cm)

Usable volume	26 ft³ (736.2 lts)
Doors	1
Door construction	Plastic frame
Shelves	6
Shelf size	W: 25 9/10" (66cm) D: 23" (58cm)
External material	Stainless steel
Internal material	Stainless steel

DATA CAPACITY**

236 ml (8 oz) Red Bull can capacity		600 ml (20 oz) bottle capacity	
Total:	1200	Total:	387
Front:	24	Front:	9
Display:	132	Display:	45

355 ml (12 oz) Red Bull can capacity

Total:	880
Front:	20
Display:	120

REFRIGERATION PERFORMANCE DATA

Refrigerant	R290 2.3oz (0.065 kg)	
Energy consumption	2.450 kwh / 24 h	
Compressor power	1/3 HP 322 watts	
Condenser	Finless	
Thermostat setting default	Cut-out 32°F (0°C)	Cut-in 44.6°F (7°C)

ELECTRICAL DATA


Power supply	115V / 60 Hz
Amps	4.3
Length of cord	128" (327cm)
Lighting	2 modules 28 total LED's
Plug type	NEMA 5-15P
Controller	ETC1H

LOGISTIC DATA


Trailer loads	20': 12 40': 26 53': 54
Unit weight w/packaging	332 lb (150.6kg)
Dimensions w/packaging	H: 83 1/10" (211cm) W: 33 9/10" (86cm) D: 35 2/5" (90cm)

PRODUCT VIEWS


Front view

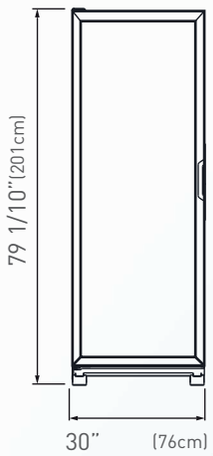

Side view

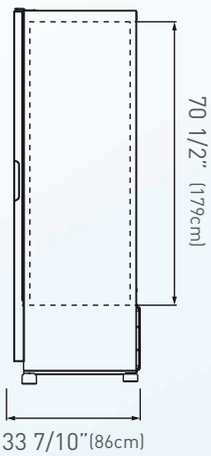

Top view



*Energy consumption based on D condition
*BMAD System (Low maintenance high performance)
*Dimensions rounded up to the nearest inch or millimeter
*Specifications subject to change without notice
*H: Heigth, W: Width, D: Depth
**Product capacity expressed at its highest level

Customer service and warranty

Operators must follow installation and operational guidelines per Imbera Users Manual
Each cooler must be connected directly to a single power supply, otherwise warranty will be voided

03/07/2020