Imbera®

VERTICAL COOLER
VRD41-48

ESTABLISHING A NEW STANDARD IN THE COMMERCIAL REFRIGERATION INDUSTRY

Energy efficient, environmentally friendly, featuring spark-free components, low refrigerant charge and the most attractive product display.



KEY FEATURES



ECO-FRIENDLY HC NATURAL REFRIGERANT

New R290 HFC-free refrigerant gas that reduces environmental impact and increases efficiency.



NEWLY DESIGNED CONDENSER

New condenser featuring a joint reduction down to zero increasing long term refrigeration reliability and safeguarding against any system leaks.




ELECTRONIC TEMPERATURE CONTROLLER

Electronic controller assures optimal refrigeration performance through precision temperature control, and intelligent control for defrost cycle, compressor & other component functions.



ELECTRONIC FAN MOTORS

Enhances performance and efficiency. Uses only a fraction of the energy and offers longer life expectancy than industry standard shaded-pole motors.



LED EFFICIENCY +220 LUX MINIMUM OUTPUT

New 5th generation constant power ultra-high efficiency LED uses lowest energy possible, with highest light output.



SPARK-FREE REFRIGERATION COMPONENTS

All HC models will have spark free refrigeration components for optimal safety, per UL requirements.

1925 Shiloh Road, Building #2 Kennesaw, GA 30144 678-504-6835 I www.imberacooling.com

Imbera

VERTICAL COOLER
VRD41-48

TECHNICAL SPECIFICATIONS

Exterior dimensions	Internal dimensions	Usable interior capacity
H: 54 1/8"	H: 40 1/4"	H: 31 7/8"
W: 47 1/4"	W: 43 1/8"	W: 35 3/8"
D: 21 3/4"	D: 19 1/2"	D: 14 3/8"

Usable volume	19.5 ft³
Doors	2
Door construction	Plastic frame
Shelves	6
Shelf size	W: 20 1/4" D: 14 5/8"
External material	Pre-painted steel
Internal material	Pre-painted steel

CAPACITY DATA**

20 oz bottle capacity

Total:	180
Facings per shelf:	6
Total facings:	36

12 oz can capacity

Total:	360
Facings per shelf:	12
Total facings:	72

REFRIGERATION PERFORMANCE DATA

Refrigerant	R290 1.9oz	
Energy consumption	1.710 kwh / 24 h	
Compressor power	1/4 HP 225 watts	
Condenser	Dynamic	
Thermostat setting default	Cut-out 32°F	Cut-in 44.6°F

ELECTRICAL DATA


Power supply	115V / 60 Hz
Amps	3.2
Length of cord	128"
Lighting	2 modules 32 total LED's
Plug type	NEMA 5-15P
Controller	ETC1H

LOGISTIC DATA


Trailer loads	20': 13 40': 27 53': 36
Unit weight w/packaging	288.6 lb
Dimensions w/packaging	H: 57 1/2" W: 50 5/8" D: 26 7/8"

PRODUCT VIEWS


Front view

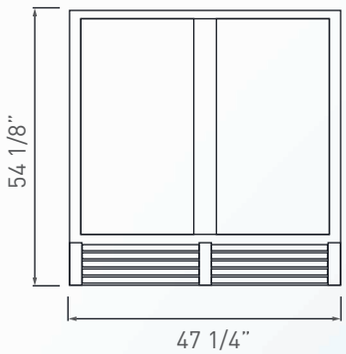

Side view

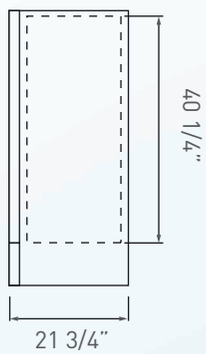

Top view

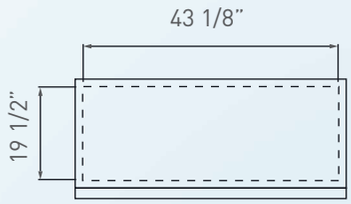

*Energy consumption based on C condition
*BMAD System (Low maintenance high performance)
*Dimensions rounded up to the nearest inch or millimeter
*Specifications subject to change without notice
*H: Height, W: Width, D: Depth
**Product capacity expressed at its highest level

Customer service and warranty

Operators must follow installation and operational guidelines per Imbera Users Manual
Each cooler must be connected directly to a single power supply, otherwise warranty will be voided

05/28/2021

1925 Shiloh Road, Building #2 Kennesaw, GA 30144 678-504-6835 I www.imberacooling.com