VRD43 HC BW
VERTICAL COOLER

ESTABLISHING A NEW STANDARD IN THE FOODSERVICE INDUSTRY.

Energy efficient, eco-friendly HC refrigerant with low charge, spark-free components, and the lowest utility costs in its category.



KEY FEATURES



• Eco-Friendly Refrigerant
Environmentally friendly hydrocarbon refriger ant has low Global Warming Potential (GWP). Meets all USA & California refrigerant & energy standards.



• Electronic Temperature Controller
Patented ETC1H electronic controller assures optimal refrigeration performance through precision temperature control, and intelligent control for defrost cycle, compressor & other component functions.



• High Power Reliable Refrigeration System
Fast pull down, optimal internal air circulation and reliable refrigeration, maintaining colder temperatures for food preservation.



• Newly Designed Condenser
New condenser featuring a joints reduction down to zero increasing long term refrigeration reliability and safeguarding against any system leaks.



• Standard LED Lighting System
Ultra bright low energy interior LED illumina tion system provides optimal merchandise display visibility. Low profile, door mounted, clip-in LED design.



• Spark-Free Refrigeration Components
All Reach-In models will have spark free refrigeration components for optimal safety, per UL requirements.

DOE


IMBERA | 1925 Shiloh Road, Building #2 Kennesaw, GA 30144 USA
P: 678.504.6835 | www.imberacooling.com


VRD43 HC BW
VERTICAL COOLER

ESTABLISHING A **NEW STANDARD** IN THE FOODSERVICE INDUSTRY.

PRODUCT VIEWS

TOP VIEW




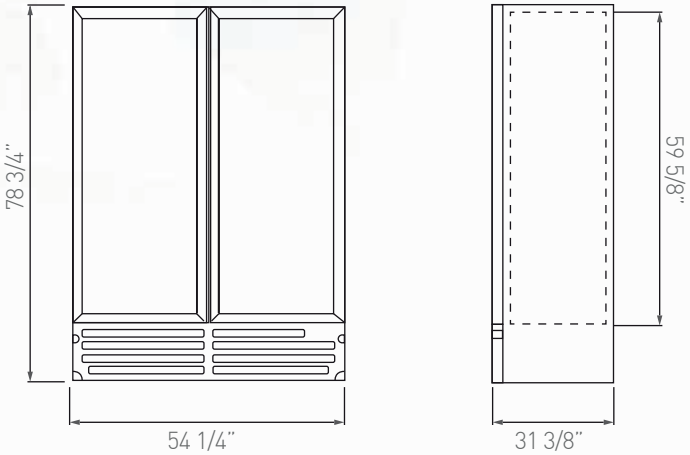

ADDITIONAL FEATURES



> Lock options with different capabilities available



> Gravity, sandwich trays and extra shelves available with this model



> Casters and legs available

Customer service and warranty

Three year limited warranty, includes parts and labor.
An additional two year warranty is issued on the compressor (USA & Canada only).
Operators must follow installation and operational guidelines per Imbera Users Manual.
Each cooler must be connected directly to a single power supply, otherwise warranty will be voided.
Customer service: 866.548.5770

TECHNICAL SPECIFICATIONS

Exterior Dimensions			Interior Dimensions		
H:	78 3/4"	200 cm	H:	59 5/8"	152 cm
W:	54 1/4"	138 cm	W:	50 1/8"	127 cm
D:	31 3/8"	80 cm	D:	24 7/8"	63 cm

Usable Interior Capacity			Usable Volume
H:	52 1/8"	132 cm	41.7 ft³
W:	47 3/8"	120 cm	1180 lts
D:	19 1/8"	49 cm	

Doors	Door construction	Shelves	Shelves Size		
2	V7 Plastic frame	10	W:	24 1/4"	62 cm
			D:	19 3/4"	50 cm

External Material Pre-painted steel
Internal Material Pre-painted steel

REFRIGERATION PERFORMANCE DATA

Refrigerant	Energy Consumption
R290 3.4 Oz (0.095 kg)	3.290 kWh/24h

Compressor Power	Condenser
1/2+ HP	Finless (low maintenance)

Thermostat setting default	Cut-Out	Cut-In
	32°F (0°C)	44.6°F (7°C)

ELECTRICAL DATA

Power supply	AMPS	Lighting
115V/60 Hz	8.7 A	205.2 Lux Output 18 modules 8 LED per module

Plug Type	Controller	Cord lenght
NEMA 5-15P	ETC1H	128" (327 cm)

LOGISTIC DATA

Trailer Loads	Unit weight with packaging		Dimensions w/packaging		
40': 23	501.7 lb	227.6 kg	H:	82 1/4"	209 cm
53': 33	**without packaging**		W:	56 1/2"	143 cm
	466.2 lb	211.5 kg	D:	31 1/2"	80 cm

*Energy consumption based on ANSI/ASHRAE Standard 72-2005
*BMAD System (Low maintenance high performance)
*Dimensions rounded up to the nearest inch or centimeter
*Specifications subject to change without notice
*H: Height, W: Width, D: Depth
12/20/20