

Steps

Design Req.



Op. Points



Magnetic Builder



Summary

Continue

Tool menu

Settings

Change tool

Magnetic Builder



All exports



Shape Family

ETD

Shape

ETD 59/31/22

Manufacturer

TDK

Material

N87

Gap Info:

Type

Ungapped

Error in wire

Plot current
density

Nc

Yes

Winding 1

Winding 2

No. Turns

26

No. Parallels

1

Type

Litz


Standard

IEC 60317

Cond.

diameter

0.05 mm

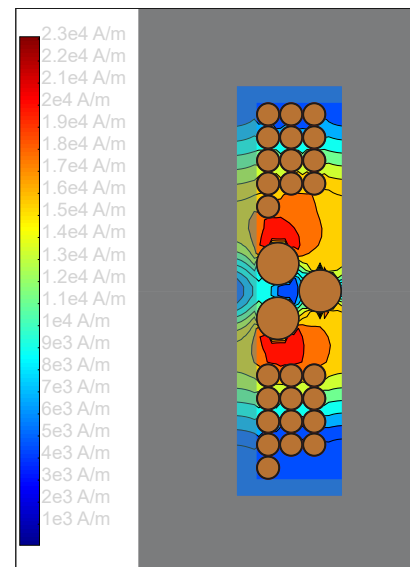

Hide H field

Exclude Fringing H field

Bobbin Wall Th.

1.8

mm

Bobbin Column Th.

2.16

mm

Section Interl.

Order

212

Fill.

59.9 %

Fill.

F_{height}

87 %

Winding losses 18.4 W

Inductance
Core Losses 3.37 W
Saturation Proportion 22.12 %

Advise
core

Customize

Load
core
from
library

No. Strands

1000

Eff. Current Density 5.56 A/mm²
Eff. Skin Depth 237.16 μ m
Outer Width 2.53 mm
Outer Height 2.53 mm
Turns Ratio 0.12

Advise
wire

Advise
all

Customize

Load
wire
from
library

Inductance /42.46 nH
Show alignment options
Show insulation options

Customize

[Home](#) [Cookie Policy](#) [Legal](#)

© 2022-2025 OpenMagnetics