



Steps

Design Req.



Op. Points



Magnetic Builder



Summary

Tool menu

Magnetic Summary



MAS Exports

Core Exports

Coil Exports

Circuit Simulators Exports

Core data

Core Shape

Name	E 70/33/32
No. Stacks	1
Effective length	0.15 m
Effective area	682.89 mm ²
Effective volume	102396.78 mm ³
Minimum Area	676.24 mm ²

Core Gapping

Type	Length	Height offset
Subtractive	0 m	0 m
Residual	5 µm	0 m
Residual	5 µm	0 m

Material Parameters

Name	N87	
Manufacturer	TDK	
	25°C	100°C
Permeance (AL value)	12.25 µH/(tu.) ²	20.15 µH/(tu.) ²
Initial Permeability (µ _i)	2304	3983
Eff. Permeability (µ _e)	2141	3520
Resistivity	10 Ωm	10 Ωm
Curie Temperature	210 °C	
Density	4.85 Mg/m ³	

Coil Global Parameters

No. Sections	4
No. Layers	6

Primary

No. turns	4
No. parallels	1
Wire	Litz undefined

Secondary

No. turns	35
No. parallels	1
Wire	Litz undefined

Simulation result per Operating Point

Op. Point No. 1

Core

Mag. Ind.	322.3 μ H
Core losses	0.48 W
Core temp.	102.08 $^{\circ}$ C
B peak	44.27 mT


Coil

Winding	DC Res.	Curr. Density	Wind. Loss	Leak. Ind.
Primary	823.88 $\mu\Omega$	7.59 A/mm ²	13.52 W	
Secondary	0.13 Ω	10.29 A/mm ²	20.45 W	480.18 nH

Coil Losses Breakdown

Winding	Ohmic Loss	Skin Loss	Prox. Loss
Primary	11.7 W	917.77 μ W	1.81 W
Secondary	15.76 W	3.34 mW	4.69 W

Core Coil

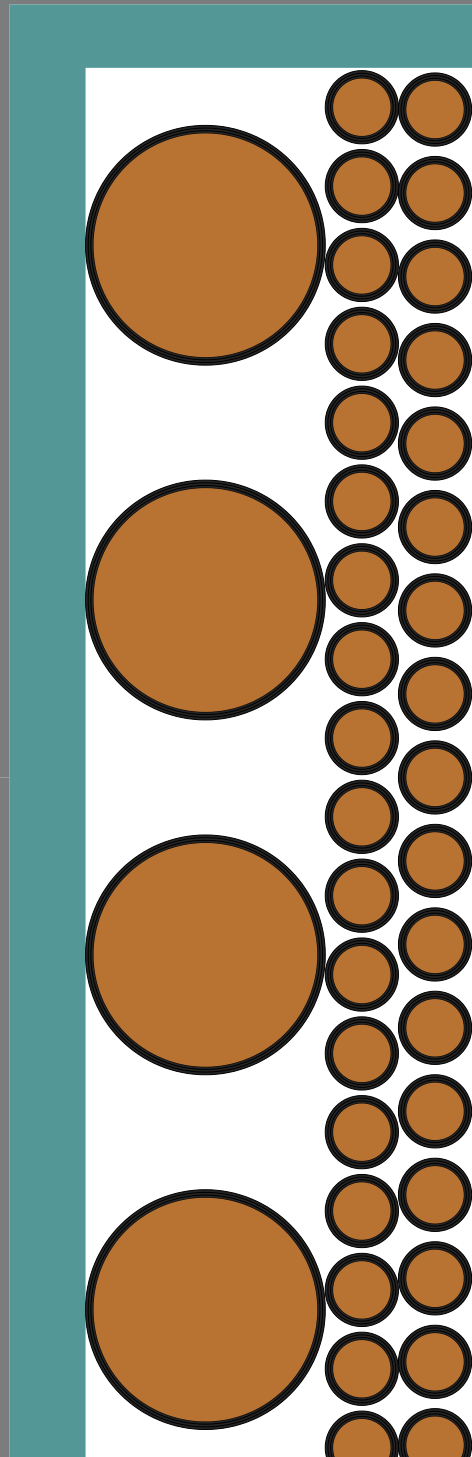

[Home](#) [Cookie Policy](#) [Legal](#)

© 2022-2025 OpenMagnetics

