




RHODES
ARCHITECTURAL
STONE
NATURAL STONE EXPERTS

RIVER BLACK SANDSTONE

Geologically rare, this exotic jet black sandstone captures the essence of the cosmic void. The absence of light gives this stone a magical, unusual, bottomless presence. Composed of billions of fine, individual grains of black gneiss, washed, compressed and welded together by hundreds of millions of years of heat and pressure, the result is without geologic parallel. Strong and durable, this stone withstands heavy weather and heavy foot traffic. Its dense structure retains carved detail and crisp arises with aplomb. Even when worked with hand-finishes, it will not refract light, so tool marks lend texture

but minimize color variation. We know of no other building stone with such magnificent characteristics. Like all sandstones, River Black is inert; it is unaffected by chlorine and will not discolor with pollution or acid rain. When wet, the stone displays an equally striking jet black sheen. River Black is often used as a border to highlight other materials, and brings out the depths of fountains and pools. Modernist architecture often draws on its pure color to contrast other legacy materials like glass and stainless steel. Whatever the form, whatever the shape or application, River Black Sandstone makes a timeless statement.

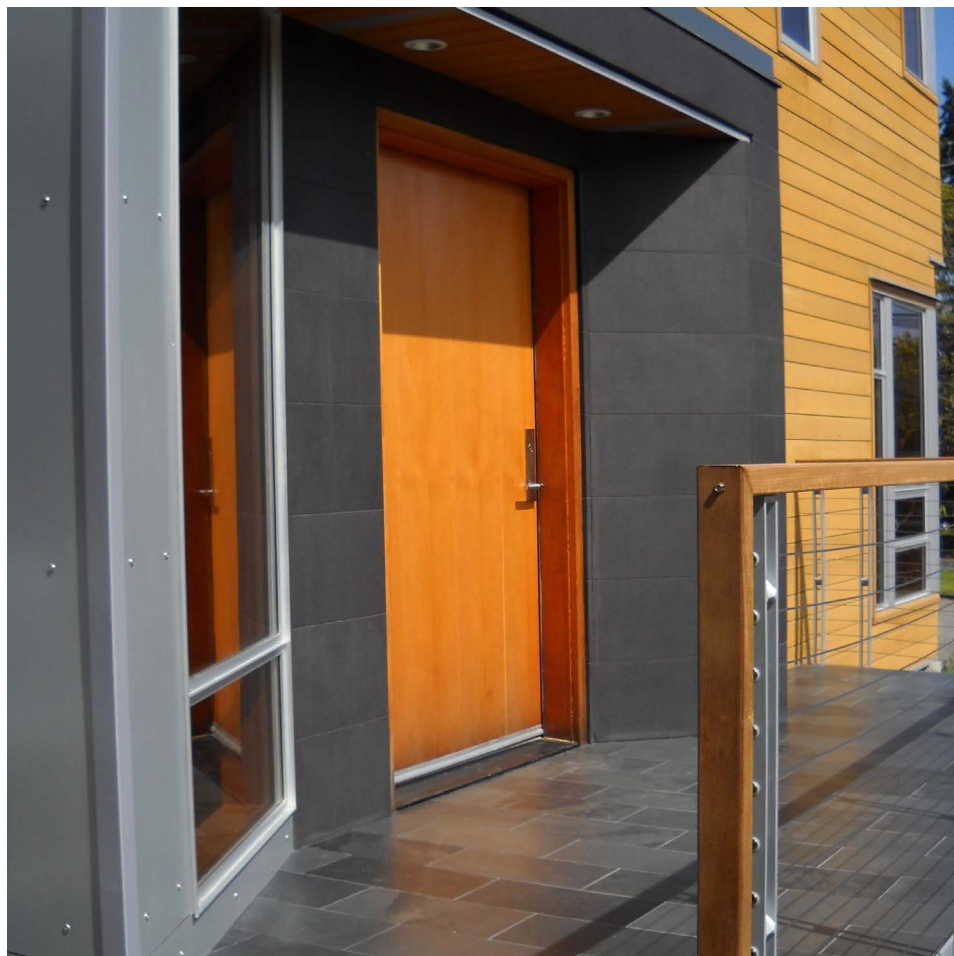

RECOMMENDED USES

PAVERS	CARVED OBJECTS
VENEER	COLUMNS
QUOINS	SINKS / TUBS
COPING / CAPS	SLABS
CURBS	COBBLESTONES
SILLS / LINTELS	DRAIN GRATES



58-74 STATION STREET
NUNAWADING VIC 3131, AUSTRALIA
TEL +61 3 8199-9555 FAX +61 3 9894-1804
www.rhodes.org

55 BELL STREET, SUITE 100
SEATTLE, WA 98121, USA
TEL 206.709.3000 FAX 206.709.3004

57 HU BIN BEI LU, XIAMEN
FUJIAN, CHINA
TEL +86 592-533-0273
FAX +86 592-537-6000 EXT. 93181




RIVER BLACK SANDSTONE




HONED
20 mm min thickness




FLAMED
20 mm min thickness




SAND RUBBED
20 mm min thickness



FINE ADZE
38 mm min thickness




COARSE ADZE
64 mm min thickness




BUSH HAMMERED
38 mm min thickness



2 POINT STALK
25 mm min thickness



PINEAPPLE
38 mm min thickness



SPLIT
75 mm min thickness



MATERIAL SPECIFICATIONS

COUNTRY OF ORIGIN : China

COLOR RANGE : black


STANDARD BLOCK SIZE : 1500 x 600 x 400 mm

MAX SPECIAL BLOCK SIZE : 2000 x 800 x 400 mm

STANDARD VENEER SIZES : 75 x 200 mm min to 400 x 650 mm max; 50 - 75 mm thick

STANDARD PAVING SIZES : 300 x 300 mm min to 600 x 750 mm max; 20 - 75 mm thick

TECHNICAL DATA		
ASTM C666	freeze thaw %	0.42
ASTM C97	absorption %	0.86
ASTM C97	bulk gravity kg/m ³	2,624
ASTM C99	mod. of rupture MPa	19.98
ASTM C880	flexural strength MPa	17.23
ASTM C170	compressive strength MPa	137.89
ASTM C241	abrasion resistance	12 Ha

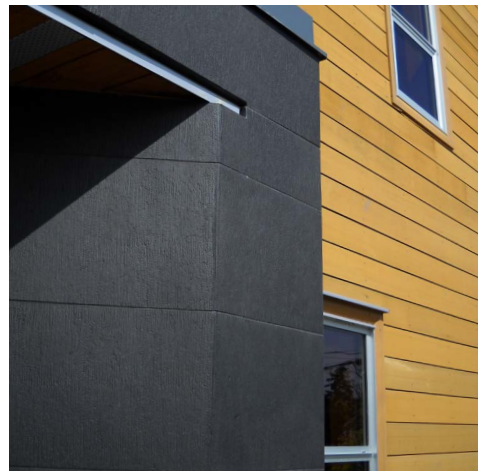

Imperial



Metric