



RHODES
ARCHITECTURAL
STONE
NATURAL STONE EXPERTS

GOLDEN DUNE GRANITE

Golden Dune Granite has long been prized for its durability and its warm tonality. Quarried in the coastal provinces of China, this large-grained stone has been the choice of Chinese builders for centuries. This granite's warm color varies with the depth of the quarry, ranging from a dark golden color to a near off-white, showing specks of cardinal, bright ochre, and black. Delightful color variations occur within individual pieces, especially those cut in extra-large formats. Our fine hand-finishes complement and enhance the


natural texture of the exposed minerals in this timeless and versatile material. Typically, tool marks lighten the stone, creating a cool ivory color that offers a striking contrast to the warmer, toasted, unmarked surface.

Golden Granite's most popular finishes are split-face, point stalk, and bush hammer. It is ideal for both large and small scale applications including paving, veneer, one-piece sinks and tubs, tabletops, and decorative pieces. Golden Granite pavers are often installed sand-set.



RECOMMENDED USES

PAVERS	DRAIN GRATES
veneer	CARVED OBJECTS
STAIR BLOCKS	COLUMNS
QUOINS	SINKS / TUBS
COPING / CAPS	SLABS
CURBS	COBBLESTONES
SILLS / LINTELS	

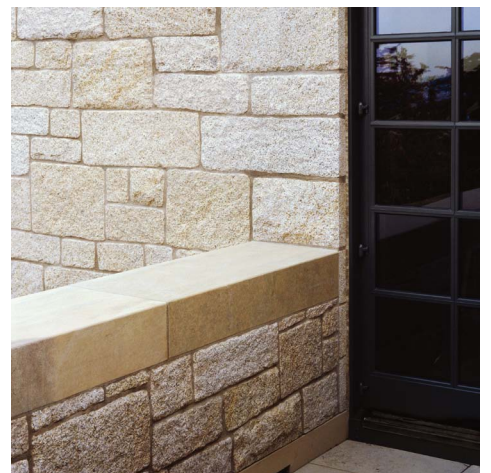

58-74 STATION STREET
NUNAWADING VIC 3131, AUSTRALIA
TEL +61 3 8199-9555 FAX +61 3 9894-1804
www.rhodes.org

55 BELL STREET, SUITE 100
SEATTLE, WA 98121, USA
TEL 206.709.3000 FAX 206.709.3004

57 HU BIN BEI LU, XIAMEN
FUJIAN, CHINA
TEL +86 592-533-0273
FAX +86 592-537-6000 EXT. 93181



GOLDEN DUNE GRANITE



HONED
20 mm min thickness



FINE ADZE
25 mm min thickness



COARSE ADZE
50 mm min thickness



MECHANICAL BUSH HAMMER
25 mm min thickness



SPLIT
75 mm min thickness



PINEAPPLE
75 mm min thickness

MATERIAL SPECIFICATIONS

COUNTRY OF ORIGIN : China



COLOR RANGE : golden color

STANDARD BLOCK SIZE : 1525 to 760 x 760 mm

MAX BLOCK SIZE : 2000 x 1320 x 760 mm

STANDARD VENEER SIZES : 75 x 200 mm min
to 400 x 650 mm max; 50 - 75 mm thick

STANDARD PAVING SIZES : 300 x 300 mm min
to 600 x 750 mm max; 20 - 75 mm thick;
100 x 100 mm; 60 - 100 mm thick cobblestones
200 x 100 mm; 60 - 100 mm thick cobblestones

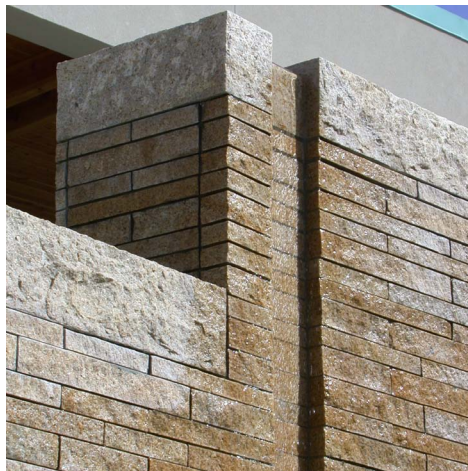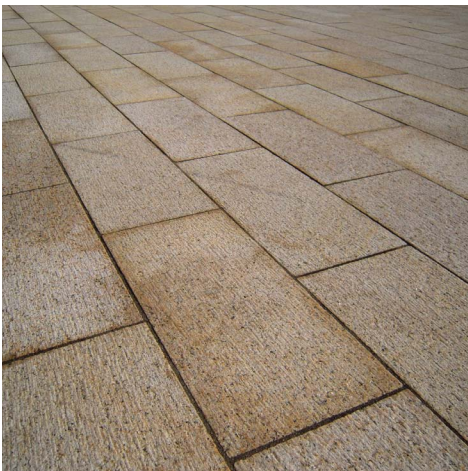

TECHNICAL DATA

ASTM C666	freeze thaw %	0.07
ASTM C97	absorption %	0.45
ASTM C97	bulk gravity kg/m ³	2,596
ASTM C99	mod. of rupture MPa	8.39
ASTM C170	compressive strength MPa	143.9
ASTM C880	flexural strength MPa	11.09
ASTM C241	abrasion resistance	31 Ha



Imperial



Metric