

OH Xceed

PREFORM COOLING EQUIPMENT FOR YOUR TOP ENTRY ROBOT SYSTEM.

FINE-TUNED PREFORM COOLING.

OH Xceed's advanced surface coating increases the service life of the preform cooling equipment, and OH Xceed enables faster block sleeve changes too. Productivity goes up because system downtime is considerably reduced. Preform cooling with OH Xceed can even shorten cycle times!

With PET preforms, post-cooling has to keep pace with the injection machine's cycle time. In order to match the cycle time and stay below the box temperature limits, preform cooling systems have to be accurately tuned. Preform cooling equipment from Otto Hofstetter delivers money-making operational advantages and money-saving maintenance benefits.

System components

Modernizing a preform cooling installation can mean replacing the take-out plate, transfer unit and cooling block. Robot parts from Otto Hofstetter feature close-contour water cooling paths, also for the bottom zone, and full aluminum protection to get the job done fast.

Making the heat transfer happen


The essential step for better preform cooling is to optimize the heat transfer between the preform and the cooling unit. Sleeve diameters of the take-out plate and the cooling block must always maintain maximum contact with the preform.

Since the preform undergoes shrinkage during the cooling process, the diameter of every successive cooling device must be smaller than the previous one. Otto Hofstetter's total process know-how ensures optimal cooling device sizing throughout this vital process step.

Otto Hofstetter's preform cooling solutions combine advanced designs and unrivaled manufacturing capabilities to create real, measurable improvements in preform cooling cycle time.



Cooling block in assembly state.

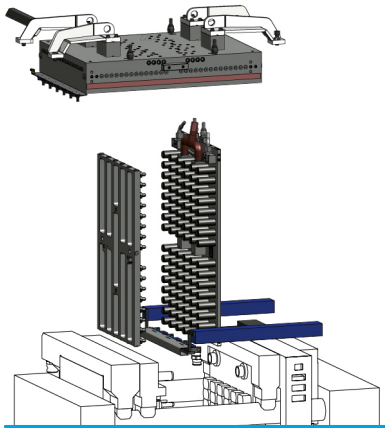

System components

OH cooling upgrades: The finishing touch

On all Otto Hofstetter equipment, the surfaces that come in contact with preforms are finely coated and perfectly finished. Along with supporting more efficient heat transfer, this high-grade finish ensures near friction-free preform sliding into and out of the cooling sleeves. Ovality is suppressed and the preform's surfaces remain free of marks.



Front-locking system on the take-out plate enables quick sleeve exchanges

Maintenance

Cooling water has different standards in different places. Our wet-surface coatings exceed industry norms. And when their service life has expired, individual cooling sleeves can be easily replaced. Last but not least, take-out plates from Otto Hofstetter have individual cooling tubes that can easily be removed and reinstalled from the front, once more saving time and money.

Return on Investment

- Field experience shows that PET lines with OH Xceed perform up to two additional production days per year from the second year onwards, and cooling blocks last up to two years longer (case dependent).

Advantages

OH Xceed systems can shorten cycle times and increase system availability, increasing the number of preforms produced. Wherever preform ovality limits the overall performance, cycle time reductions of 5 to 10% can be expected. If the existing equipment uses indirect cooling with a dry sleeve on a water-cooled base plate, cycle times can even reduce by 10 to 20%.

IS ROBOTIC EQUIPMENT A TROUBLEMAKER AT YOUR PLANT?

CONTACT US TO FIND OUT WHAT WE CAN DO.

WE MAKE THE COOLING PROCESS WORK FOR YOU.
