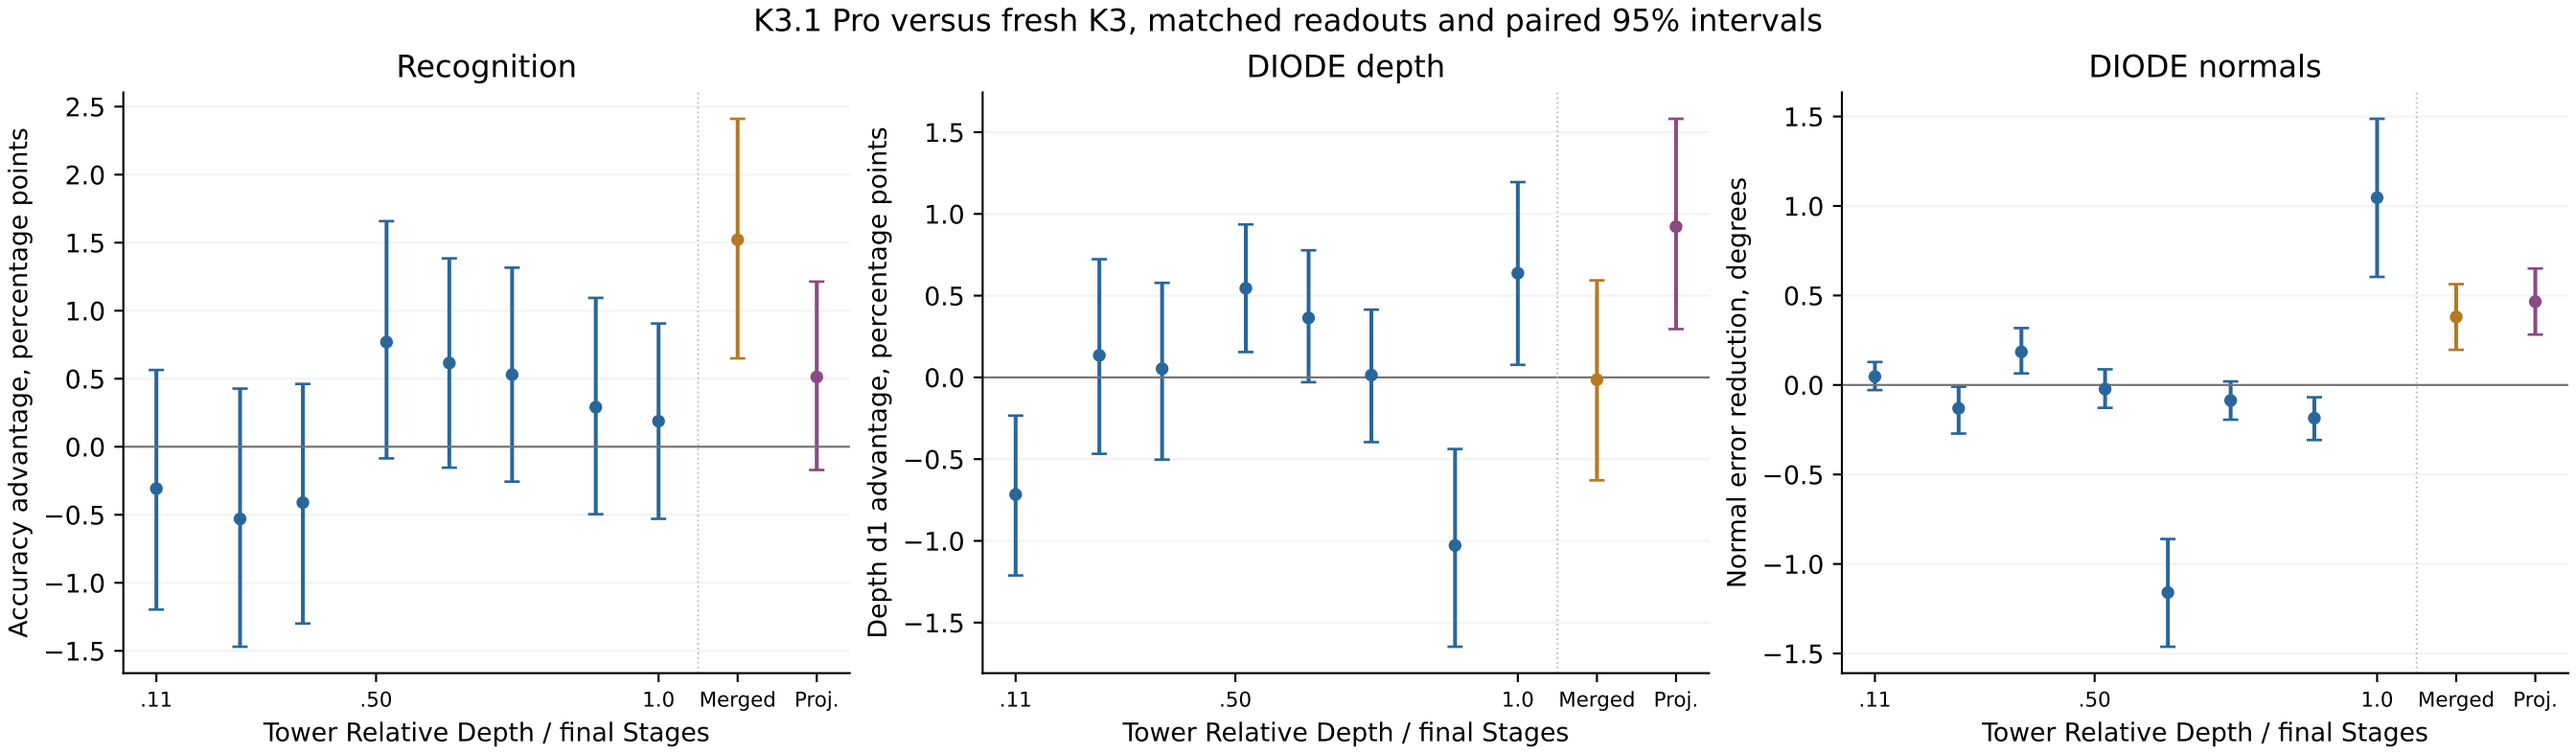
K3.1 Pro versus fresh K3, matched readouts and paired 95% intervals
Recognition
DIODE depth
DIODE normals
Accuracy advantage, percentage points
Depth d1 advantage, percentage points
Normal error reduction, degrees
2.5
2.0
1.5
1.0
0.5
0.0
−0.5
−1.0
−1.5
.11
.50
1.0
Merged
Proj.
Tower Relative Depth / final Stages