



# Arctic Lena

## Installation Guide

Arctic Lena with Shadowline Ceiling Channel

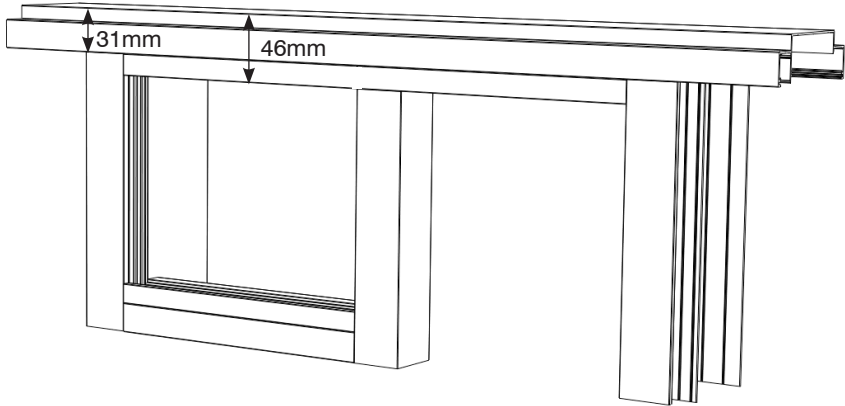

Arctic Lena with Ceiling Channel (No Shadowline)

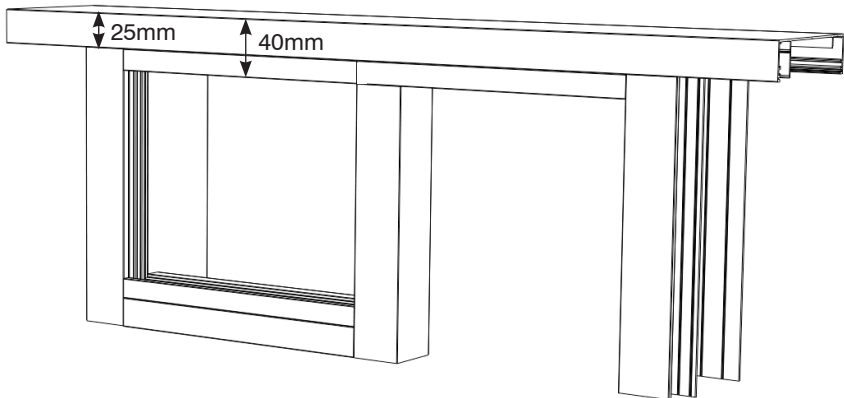

## Important Installation Consideration

Please read all of the instructions before installation.

Not using the drilling Jig provided may result in non accurate holes.

Not installing the Arctic roller mechanism correctly may cause damage - refer to Arctic installation instructions.

## Components



CI-P2211

Platinum 90 Ceiling Channel



CI-P2233

Platinum Offset Frame



CI-2221

Lena 90 Receiver Channel



CI-2254


Lena 90 Sill Section



CI-817410 & CI-817414

Lena 90 Bottom Plastic

Corner Stakes



CI-817412

Lena 90 Plastic Drilling Jig

CI-817042

Soft Close with Standard  
Plate

817020

Standard Roller with quick fix  
plates



CI-L2410

Linium 90 Ceiling Channel

No Shadowline)




CI-P4256

Offset & Double Glaze Sill Bead




CI-2234

Lena 90 Offset Glazing Frame



CI-2246

Lena 90 Offset Track



CI-817411

Lena 90 Receiver Channel

Plastic Cap



CI-P4260

Platinum 90 Pocket Filler



817026

Soft Close with  
Low Clearance

817022

Low Clearance

# Arctic Lena® Installation Instructions





## Step 1.

Mount the ceiling channel into place.

## Step 2.

Using the Lena 90 Plastic Drilling Jig, drill 2 holes into the **top** of the Platinum 90 Offset Frame using the holes marked "C".

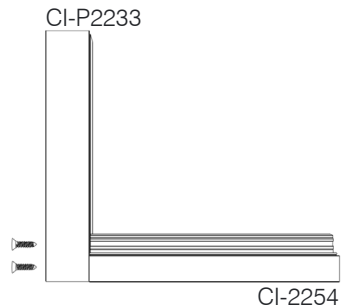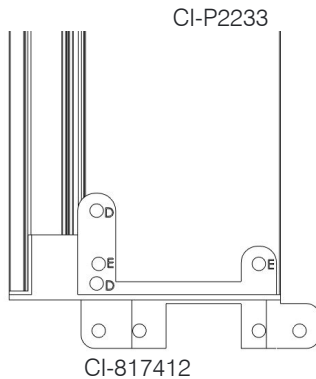



## Step 3.

Using the Lena 90 Plastic Drilling Jig, drill 2 holes into the **bottom** of the Platinum 90 Offset Frame using the holes marked "D".

## Step 4.

Screw together the Platinum 90 Offset Frame and the Lena 90 Sill Section.

# Arctic Lena® Installation Instructions

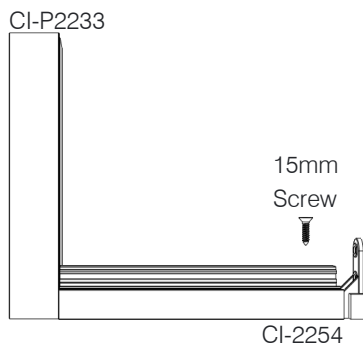
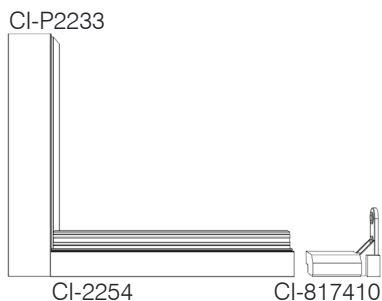


## Step 5.

Position the Lena 90 Plastic Corner Stake into the Lena 90 Sill Section, Depending on which way the partition is facing will decided if CI-817410 or CI-817414 will fit.

## Step 6.

Screw the Lena 90 Sill Section through the 'V' groove into the Lena 90 Plastic Corner Stake.

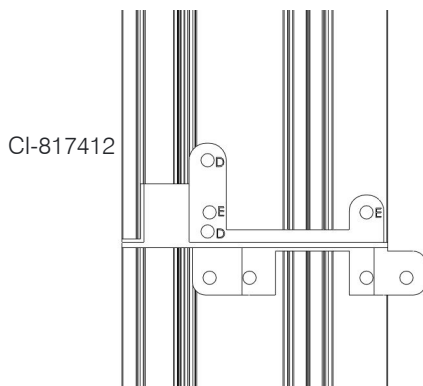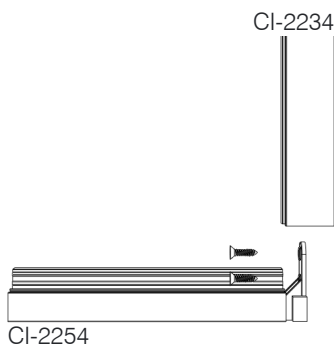


## Step 7.

Position the Lena 90 Offset Glazing Frame onto the vertical section of the Lena 90 Plastic Corner Stake and screw together.

## Step 8.

Measure and mark the position of the Lena 90 Offset Glazing Frame on the Lena 90 Offset Track, use the Lena 90 Plastic Drilling Jig at this measurement and drill two holes using the holes marked "D".

# Arctic Lena® Installation Instructions

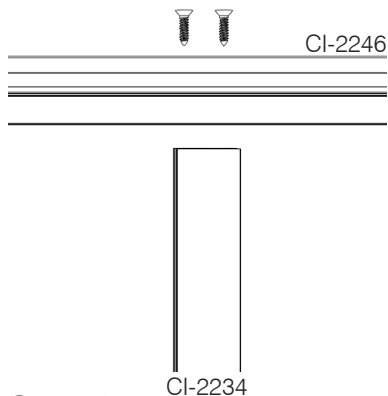


## Step 9.

Screw the Lena 90 Offset Track to the Lena 90 Offset Frame using the two holes drilled in the previous step.




## Step 10.

Screw the Platinum 90 Offset Frame to the Lena 90 Offset Track using the holes drilled in step 2.

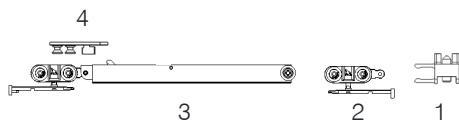

## Step 11.



Load the track with Arctic roller mechanism. Please refer to Arctic Instructions.



## Step 12.


Clip the semi assembled frame into the ceiling channel by positioning the frame on an angle. If using a shadowline ceiling channel place a 6mm MDF packer above the track before fixing

# Arctic Lena® Installation Instructions

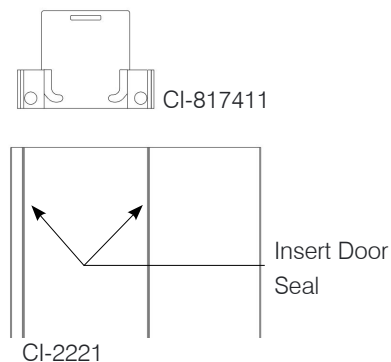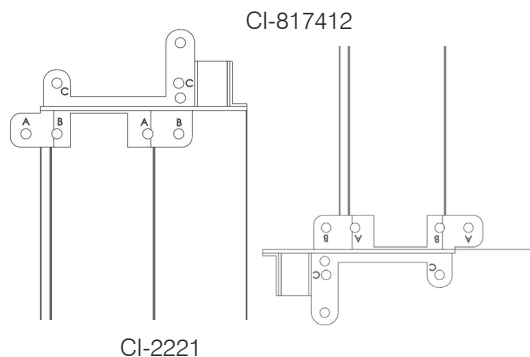


## Step 13.

Using the Lena 90 Plastic Drilling Jig, drill 2 holes into the Lena 90 Receiver Channel using the holes marked "A or B" depending on which way the Lena 90 Receiver Channel is facing.

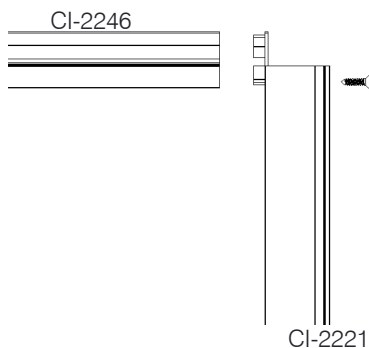

## Step 14.

Insert the Lena 90 Receiver Channel Plastic Cap into the top of the Lena 90 Receiver Channel.

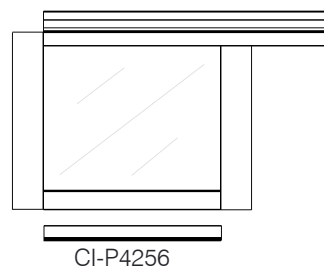


## Step 15.

Screw together the Lena 90 Offset Track and Lena 90 Receiver Channel using the holes drilled from the previous step.

## Step 16.


Glaze window using the Platinum 90 Sill Bead.

## Arctic Lena® Installation Instructions

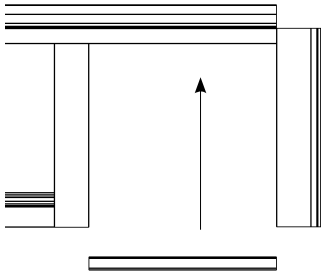

### Step 17.

Clip in the Platinum 90 Pocket Filler into the glazing pocket over door opening.

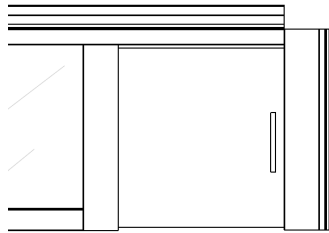

### Step 18.

Hang the door using the Arctic Roller Set. Refer to Arctic instructions.

## Important Considerations

This product is covered by a 10 year replacement product warranty and spare parts.

- This warranty will apply only under all of the following conditions:
- The item has been installed by a licensed and registered builder/installer.
- The installation of the product is in accordance with the instructions provided
- Failure is due to a fault in the manufacture of the product.
- Proof of purchase (including the date of purchase) is provided.
- This warranty does not include faults caused by: Unsuitable or improper use.
- Incorrect installation or installation not in accordance with the instructions provided.
- Installation or part installation by the purchaser or any person other than a licensed and registered builder/installer.
- Normal wear and tear.

**For more information visit:**

**[www.criterionindustries.com.au/lena](http://www.criterionindustries.com.au/lena)**

### **VIC**

15 Corporate Place  
Broadmeadows, VIC, 3047  
T: 03 9355 0700

[sales@criterionindustries.com.au](mailto:sales@criterionindustries.com.au)

### **NSW**

95 Victoria Street  
Smithfield, NSW, 2164  
T: 02 9355 0700

[sales.nsw@criterionindustries.com.au](mailto:sales.nsw@criterionindustries.com.au)

### **WA**

58 Tacoma Circuit  
Canning Vale WA 6155  
T: 08 9355 0700

[sales.wa@criterionindustries.com.au](mailto:sales.wa@criterionindustries.com.au)

## **Technical Specifications:**

- Arctic Roller Set

- Cycle Tested

Ensure the item has been installed by a licensed and registered builder/installer.