

Multi PCSM

IEC

Easy maintenance.


Integrated MV solution in the same enclosure.

Up to 4 independent DC inputs.

Advanced grid support.

Compatible with all battery technologies.




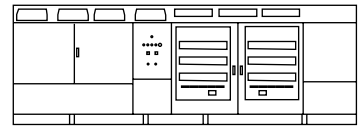

REFERENCES	FP4010MH2	FP4010MH4	FP4105MH2	FP4105MH4	
AC	AC Output Power (kVA/kW) @40 °C ^[1]	4010	4105		
	AC Output Power (kVA/kW) @50 °C ^[1]	3720	3810		
	Operating Grid Voltage (kV)	34.5 kV ±10%			
	Operating Grid Frequency (Hz)	60 Hz			
DC	DC Voltage Range ^[3]	891 V - 1500 V		913 V - 1500 V	
	Max. DC Continuous Current per Input (A)	2295	1148	2295	1148
	Number of Separate DC Inputs	2	4	2	4
EFFICIENCY & AUX. SUPPLY	Efficiency (Max) (η) (preliminary)	97.75% including MV transformer		97.76% including MV transformer	
	Euroeta (η) (preliminary)	97.48% including MV transformer		97.50% including MV transformer	
ENVIRONMENT	Max. Altitude (above sea level)	2000 m			
COMMON FEATURES					
AC	Current Harmonic Distortion (THDi)	<3% per IEEE 519			
	Power Factor (cos phi) ^[2]	0.5 leading ... 0.5 lagging			
	Reactive Power Compensation	Four quadrant operation			
	Overload Capability ^[7]	166% - 100 ms / 150% - 5 s / 120% - 8 s / 110% - 15 s			
DC	Maximum DC Voltage	1500 V			
	DC Voltage Ripple	<3%			
	Max. DC Short Circuit Current per Input (kA)	500 kA with a time constant of 1 ms			
	Battery Technology	All type of batteries (BMS required)			
CABINET	Dimensions [WxDxH] (ft)	21.3 x 6.5 x 7.5			
	Dimensions [WxDxH] (m)	6.5 x 2.0 x 2.3			
	Weight (lbs)	30865			
	Weight (kg)	14000			
	Type of Ventilation	Forced air cooling			
ENVIRONMENT	Degree of Protection	IP55			
	Operating Temperature Range ^[4]	From -40 °C to +60 °C, >40 °C power derating			
	Operating Relative Humidity Range	From 4% to 100%			
	Storage Temperature Range	From -40 °C to +60 °C			
CONTROL	Communication Protocol	Modbus TCP			
	Power Plant Controller	Optional. Third party SCADA systems supported.			
	Keyed ON/OFF Switch	Standard			
PROTECTIONS	Ground Fault Protection	Insulation monitoring device			
	Humidity Control	Active heating			
	General AC Protection & Disconn.	36 kV MV switchgear (2L+V)			
	General DC Protection & Disconn.	High-speed fuses, Motorized DC disconnect switches ^[6]			
	Overvoltage Protection	Type II for AC and Type I+II for DC			
STANDARDS	Safety	IEC 62109-1 / IEC 62109-2 / IEC 62477-2			

NOTES


- [1] Values at 1.00-Vac nom and cosφ=1. Consult Power Electronics for derating curves.
[2] Consult P-Q charts available: $Q(kVar) = \sqrt{(S(kVA))^2 - P(kW)^2}$.
[3] Consult Power Electronics for derating curves. In the event of overvoltage in the grid, the minimum DC voltage will vary proportionally with the AC voltage.
[4] Optional available for temperatures below -25 °C.
[5] Consult Power Electronics for altitudes above 1000 m.
[6] Battery short circuit disconnection must be done on the battery side.
[7] Available from January 2027.

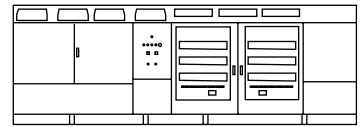

REFERENCES		FP4200MH2	FP4200MH4	FP4203MH2	FP4203MH4
AC	AC Output Power (kVA/kW) @40 °C ^[1]	4200			
	AC Output Power (kVA/kW) @50 °C ^[1]	3900			
	Operating Grid Voltage (kV)	34.5 kV ±10%		33 kV ±10%	
	Operating Grid Frequency (Hz)	60 Hz		50 Hz	
DC	DC Voltage Range ^[3]	934 V - 1500 V			
	Max. DC Continuous Current per Input (A)	2295	1148	2295	1148
	Number of Separate DC Inputs	2	4	2	4
EFFICIENCY & AUX. SUPPLY	Efficiency (Max) (η) (preliminary)	97.80% including MV transformer			
	Euroeta (η) (preliminary)	97.51% including MV transformer			
ENVIRONMENT	Max. Altitude (above sea level) ^[5]	2000 m		1000 m	
COMMON FEATURES					
AC	Current Harmonic Distortion (THDi)	<3% per IEEE 519			
	Power Factor (cos phi) ^[2]	0.5 leading ... 0.5 lagging			
	Reactive Power Compensation	Four quadrant operation			
	Overload Capability ^[7]	166% - 100 ms / 150% - 5 s / 120% - 8 s / 110% - 15 s			
DC	Maximum DC Voltage	1500 V			
	DC Voltage Ripple	<3%			
	Max. DC Short Circuit Current per Input (kA)	500 kA with a time constant of 1 ms			
	Battery Technology	All type of batteries (BMS required)			
CABINET	Dimensions [WxDxH] (ft)	21.3 x 6.5 x 7.5			
	Dimensions [WxDxH] (m)	6.5 x 2.0 x 2.3			
	Weight (lbs)	30865			
	Weight (kg)	14000			
	Type of Ventilation	Forced air cooling			
ENVIRONMENT	Degree of Protection	IP55			
	Operating Temperature Range ^[4]	From -40 °C to +60 °C, >40 °C power derating			
	Operating Relative Humidity Range	From 4% to 100%			
	Storage Temperature Range	From -40 °C to +60 °C			
	Communication Protocol	Modbus TCP			
CONTROL	Power Plant Controller	Optional. Third party SCADA systems supported.			
	Keyed ON/OFF Switch	Standard			
PROTECTIONS	Ground Fault Protection	Insulation monitoring device			
	Humidity Control	Active heating			
	General AC Protection & Disconn.	36 kV MV switchgear (2L+V)			
	General DC Protection & Disconn.	High-speed fuses, Motorized DC disconnect switches ^[6]			
	Overvoltage Protection	Type II for AC and Type I+II for DC			
STANDARDS	Safety	IEC 62109-1 / IEC 62109-2 / IEC 62477-2			

NOTES

- [1] Values at 1.00-Vac nom and cosφ=1. Consult Power Electronics for derating curves.
[2] Consult P-Q charts available: $Q(kVar) = \sqrt{(S(kVA))^2 - P(kW)^2}$.
[3] Consult Power Electronics for derating curves. In the event of overvoltage in the grid, the minimum DC voltage will vary proportionally with the AC voltage.
[4] Optional available for temperatures below -25 °C.
[5] Consult Power Electronics for altitudes above 1000 m.
[6] Battery short circuit disconnection must be done on the battery side.
[7] Available from January 2027.



REFERENCES		FP4207MH2	FP4207MH4
AC	AC Output Power (kVA/kW) @40 °C ^[1]	4200	
	AC Output Power (kVA/kW) @50 °C ^[1]	3900	
	Operating Grid Voltage (kV)	33 kV ±10%	
	Operating Grid Frequency (Hz)	50 Hz	
DC	DC Voltage Range ^[3]	934 V - 1500 V	
	Max. DC Continuous Current per Input (A)	2295	1148
	Number of Separate DC Inputs	2	4
EFFICIENCY & AUX. SUPPLY	Efficiency (Max) (η) (preliminary)	97.80% including MV transformer	
	Euroeta (η) (preliminary)	97.51% including MV transformer	
ENVIRONMENT	Max. Altitude (above sea level) ^[5]	2000 m	
COMMON FEATURES			
AC	Current Harmonic Distortion (THDi)	<3% per IEEE 519	
	Power Factor (cos phi) ^[2]	0.5 leading ... 0.5 lagging	
	Reactive Power Compensation	Four quadrant operation	
	Overload Capability ^[7]	166% - 100 ms / 150% - 5 s / 120% - 8 s / 110% - 15 s	
DC	Maximum DC Voltage	1500 V	
	DC Voltage Ripple	<3%	
	Max. DC Short Circuit Current per Input (kA)	500 kA with a time constant of 1 ms	
	Battery Technology	All type of batteries (BMS required)	
CABINET	Dimensions [WxDxH] (ft)	21.3 x 6.5 x 7.5	
	Dimensions [WxDxH] (m)	6.5 x 2.0 x 2.3	
	Weight (lbs)	30865	
	Weight (kg)	14000	
ENVIRONMENT	Type of Ventilation	Forced air cooling	
	Degree of Protection	IP55	
	Operating Temperature Range ^[4]	From -40 °C to +60 °C, >40 °C power derating	
	Operating Relative Humidity Range	From 4% to 100%	
CONTROL	Storage Temperature Range	From -40 °C to +60 °C	
	Communication Protocol	Modbus TCP	
	Power Plant Controller	Optional. Third party SCADA systems supported.	
	Keyed ON/OFF Switch	Standard	
PROTECTIONS	Ground Fault Protection	Insulation monitoring device	
	Humidity Control	Active heating	
	General AC Protection & Disconn.	36 kV MV switchgear (2L+V)	
	General DC Protection & Disconn.	High-speed fuses, Motorized DC disconnect switches ^[6]	
STANDARDS	Overvoltage Protection	Type II for AC and Type I-II for DC	
	Safety	IEC 62109-1 / IEC 62109-2 / IEC 62477-2	

NOTES

- [1] Values at 1.00-Vac nom and cosφ=1. Consult Power Electronics for derating curves.
[2] Consult P-Q charts available: $Q(kVar) = \sqrt{(S(kVA))^2 - P(kW)^2}$.
[3] Consult Power Electronics for derating curves. In the event of overvoltage in the grid, the minimum DC voltage will vary proportionally with the AC voltage.
[4] Optional available for temperatures below -25 °C.
[5] Consult Power Electronics for altitudes above 1000 m.
[6] Battery short circuit disconnection must be done on the battery side.
[7] Available from January 2027.