


The **TP4056** module is a lithium-ion battery linear charger. This module is capable of charging single-cell batteries. Most importantly, it offers to charge modes with constant current and constant voltage. The TP4056 is also a battery charger with a 4.2-volt set charge voltage.

TP4056 Pinout

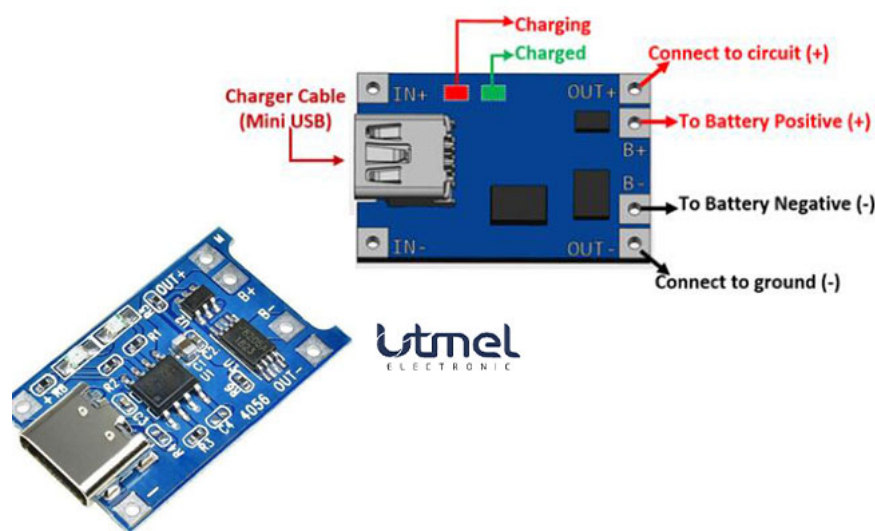

TP4056 Pinout

No:	Pin Name	Description
1	OUT +	These pins output the positive voltage from the battery. It should be connected to the circuit which has to be powered by the battery
2	B +	Outputs positive voltage from the USB cable to charge to the battery. It should be connected to the positive of the battery
3	B -	Outputs negative voltage from USB cable for charging the battery. It should be connected to the negative of the battery
4	OUT -	This pin outputs negative voltage from the battery. It should be connected to the ground of the circuit which has to be powered by the battery
5	IN +	Should provide +5V, can be used if charge cable not available
6	IN -	Should provide the ground of the +5V supply, can be used if charge cable not available
7	LED Red	This LED turns on while the battery is charging
8	LED Green	This LED turns on after the battery is fully charged

Specifications

TPOWER TP4056 technical specifications, attributes, parameters and parts with similar specifications to TPOWER TP4056.

Type	Parameter		
Package / Case	ESOP-8	Packaging ⓘ	Tape & Reel (TR)
RoHS Status ⓘ	RoHS Compliant		

TP4056 Features

- This module can charge and discharge Lithium batteries safely
- Suitable for 18650 cells and other 3.7V batteries
- Charging current – 1A (adjustable)
- Input Voltage: 4.5V to 5.5V
- Full charge voltage 4.2V
- Protects battery from overcharging and over-discharging
- No verse polarity protection

TP4056 Equivalentents


TP4056A (only charging), TP541

TP4056 Applications

- Solar Chargers
- Digital Cameras
- Portable Home Appliances
- Cell Phones & Tablets
- Charge and Discharge Lithium cells
- Commonly used with 18650 Li-ion batteries
- Power banks
- Used with 5V booster for powering Arduino projects

TP4056 Typical Applications

The charging current of the module is set to 1A by default. However, it can be changed by altering the **resistor** RPROG (R3 on the module) in the circuit diagram. The datasheet for the TP4056 datasheet may be seen below for more information.

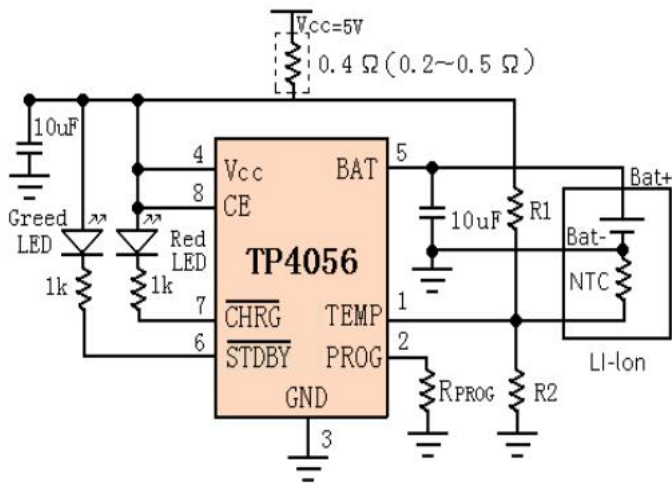

TP4056 Application Circuit

The module will automatically stop charging after the Lithium battery is fully charged, and the Red LED will turn off and the Green LED will turn on to signal completion. As illustrated in the pin diagram above, the circuit can now be connected to the Circuit (Load) that must be powered by this battery. The voltage of the battery will be monitored as it is consumed by the circuit by the module (load). When it falls below the crucial level (3.7V), the module will separate your battery from the load and safeguard it from over-discharge.

Where to Use TP4056

It is ideal for charging 18650 cells and other 3.7V batteries because of its capacity to supply 4.2V. Because it only requires a few external components, it can be used in portable applications. Mobile phones, tablets, laptops, cameras, power banks, and a variety of other electronic gadgets all consume batteries; hence this module is used to charge them. This module can also be utilized with a USB port and a wall adaptor.


How to use TP4056

The TP4056 module is powered by a 5V supply from a micro USB cable or the IN+ and IN- solder pads. For the charger to correctly charge a battery connected at the output terminals, a current of at least 1A is necessary. Connect the B+ and B- connections to the cell you want to charge. The battery's power is supplied through the OUT+ and OUT- pads. As a result, if you're running a load, you can attach it to these two pads. But remember to disconnect the load from the module if you're charging a cell.



TP4056 Connection Schematic

TP4056 Dimension

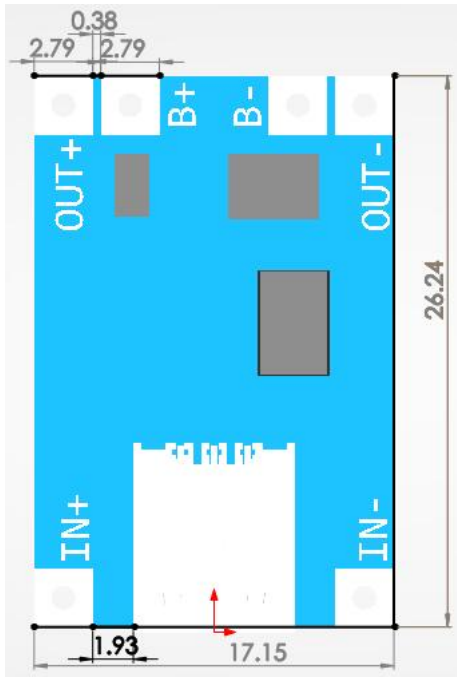

TP4056 Dimension

TP4056 Manufacturer

Share this post [f](#) [in](#) [t](#) [e](#)

.. Frequently Asked Questions

What does a TP4056 do?

The TP4056 chip is a lithium-ion battery charger for a single cell battery, protecting the cell from over and undercharging. It has two status outputs indicating charging in progress and charging complete. You can use it to charge batteries directly from a USB port since the working input voltage range is 4V ~ 8V.

How does TP4056 module work?

The charge voltage is fixed at 4.2V, and the charge current can be programmed externally with a single resistor. The TP4056 automatically terminates the charge cycle when the charge current drops to 1/10th the programmed value after the final float voltage is reached.

How many batteries can a TP4056 charge?

You can connect two lithium battery cells in parallel to form an equivalent single cell battery with a total capacity of twice that of the individual single cells, but we do not recommend connecting more than two cells at a time to this module.

What is output voltage of TP4056?

Output voltage: DC 4.2V. 4 chips, with a reasonable turn-off voltage, the charging circuit for each chipset 750mA, total 3A. Input connected two 5A Schottky diodes, 5V standard voltage input chip heat ideal (3.8V battery test).

Can TP4056 charge multiple batteries?

Don't. Just use one TP4056 and connect both cells in parallel after balancing them first. Don't connect batteries with more than 0.2V difference in parallel as this can risk fire and explosions (excessive charging current from one to another).

## // Related Articles




### LR44 vs. 357: Are LR44 and 357 cells interchangeable?

25 November 2021 121389

Although LR44 and 357 batteries look the same shape, they perform differently. The LR44 is an Alkaline Zinc Manganese button cell battery, whereas, the 357 is a silver oxide button cell battery. Today, this article is going to explain what differences lie in and whether they can interchangeable.

[Read More >](#)




### S8050 NPN Silicon Transistors: Datasheet, Pinout and Equivalent

30 August 2021 111974

S8050 is an NPN, a general-purpose transistor. This article mainly covers datasheet, pinout, equivalents, applications, and other details about S8050.

[Read More >](#)



### RP2040 VS ESP32[Video+FAQ]: Which one is better?

03 March 2022 92289

RP2040 and ESP32 are all microcontrollers. This article is going to talk about the differences between them.

[Read More >](#)



### CR2450 vs. CR2032: Are they interchangeable?

17 November 2021 73228

According to the COMSAR battery standard, the sizes of the CR2450 and CR2032 are different. CR refers to lithium manganese round batteries, 2032 means 20 mm in diameter and 3.2 mm in thickness, and 2450 means 24 mm in diameter and 5 mm in thickness. Although they are both lithium batteries, can they be...

[Read More >](#)



### LR44 Battery: Equivalent, Specifications and Replacements

05 November 2021 47894

LR44 is an alkaline manganese battery. This article will introduce LR44 battery equivalents, specifications, applications, and compare LR44 with 357 Battery to let you make a difference. Furthermore, there are huge in stock. Welcome your RFQ!

[Read More >](#)



**2000+**  
Daily average RFQ Volume



**30,000,000**  
Standard Product Unit



**2800+**  
Worldwide Manufacturers



## CONNECT WITH US

Hong Kong: +852-52658195

Canada: +1-4388377556

Email: [info@utmel.com](mailto:info@utmel.com)

## INFORMATION

[Contact Us](#)

[About Utmel](#)

[Privacy Policy](#)

[Cookies Policy](#)

[Term & Condition](#)

## SUPPORT

[Shipping & Delivering](#)

[Purchase Guide](#)

[Refund & Return](#)

## QUICK I

[Blog](#)

[Feedback](#)

[Refund &](#)

[Certificat](#)

## FOLLOW US



## PAYMENT



## SUBSCRIBE

Enter your email

[Subscribe](#)

## EXCELL

## CERTIFICATION