


## ENERGIZER NO. CR1225




### Industry Standard Dimensions

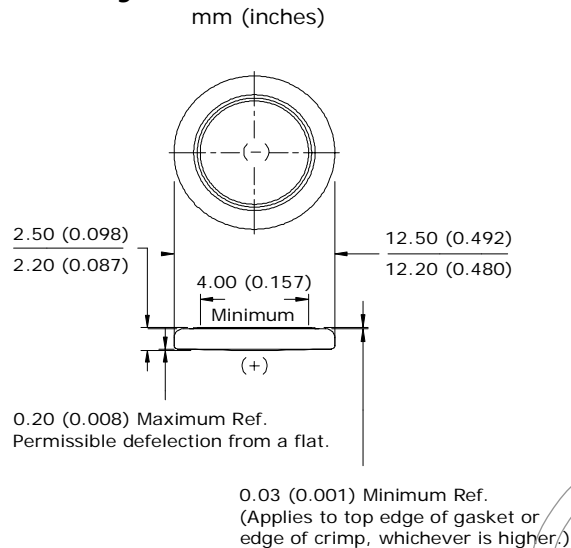


### Specifications

<b>Classification:</b>	"Lithium Coin"
<b>Chemical System:</b>	Lithium / Manganese Dioxide (Li/MnO <sub>2</sub> )
<b>Designation:</b>	ANSI-5020LC, IEC-CR1225
<b>Nominal Voltage:</b>	3.0 Volts
<b>Typical Capacity:</b>	50 mAh (to 2.0 volts) (Rated at 45K ohms at 21°C)
<b>Typical Weight:</b>	0.9 grams (0.02 oz.)
<b>Typical Volume:</b>	0.3 cubic centimeters (0.02 cubic inch)
<b>Max Rev Charge:</b>	1 microampere
<b>Energy Density:</b>	161 milliwatt hr/g, 518 milliwatt hr/cc
<b>Shipping:</b>	For complete details, please reference: Global (except US): Special Provision A45 of the International Air Transport Association Dangerous Goods Regulations United States: 49 CFR 173.185

### Cross Section

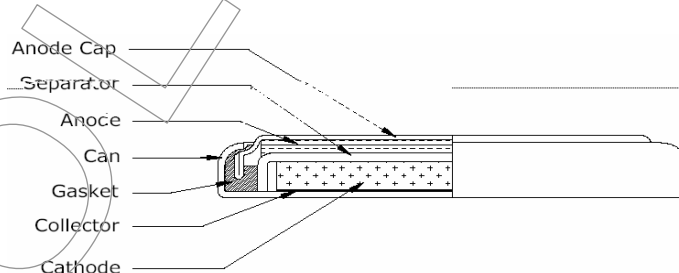

### Typical Discharge Characteristics

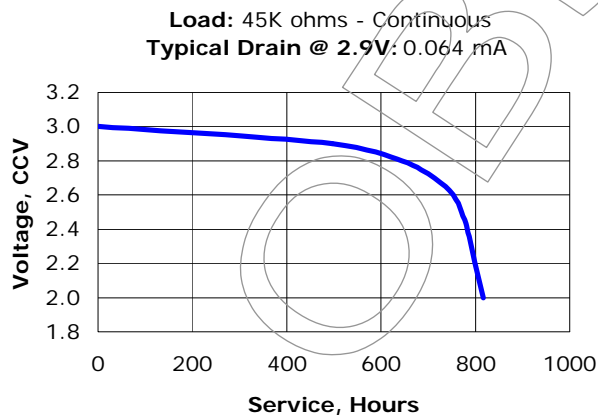

### Simulated Application test

Typical Performance at 21°C (70°F)

Schedule:	Typical Drains: at 2.9V (mA)	Load (ohms)	Cutoff 2.0V (hours)
Continuous	0.064	45,000	817

### Important Notice

This data sheet contains typical information specific to batteries manufactured at the time of its publication.

**Contents herein do not constitute a warranty.**

©Eveready Battery Company, Inc. - All Rights Reserved