Operating Systems

Isfahan University of Technology
Electrical and Computer Engineering Department

Zeinab Zali

Virtual Memory

Background

- Code needs to be in memory to execute, but entire program rarely used
  - **Error code, unusual routines, large data structures**
- Entire program code not needed at same time
- Consider ability to execute partially-loaded program
  - Program no longer constrained by limits of physical memory
  - Each program takes less memory while running -> more programs run at the same time
    - Increased CPU utilization and throughput with no increase in response time or turnaround time
  - Less I/O needed to load or swap programs into memory -> each user program runs faster

Background (Cont.)

- **Virtual memory – separation of user logical memory from physical memory**
  - Only part of the program needs to be in memory for execution
  - Logical address space can therefore be much larger than physical address space
  - Allows address spaces to be shared by several processes
  - Allows for more efficient process creation
  - More programs running concurrently
  - Less I/O needed to load or swap processes

Background (Cont.)

- **Virtual address space** – logical view of how process is stored in memory
  - Usually start at address 0, contiguous addresses until end of space
  - Meanwhile, physical memory organized in page frames
  - MMU must map logical to physical
- Virtual memory can be implemented via:
  - **Demand paging**
  - **Demand segmentation**

Virtual Memory That is Larger Than Physical Memory

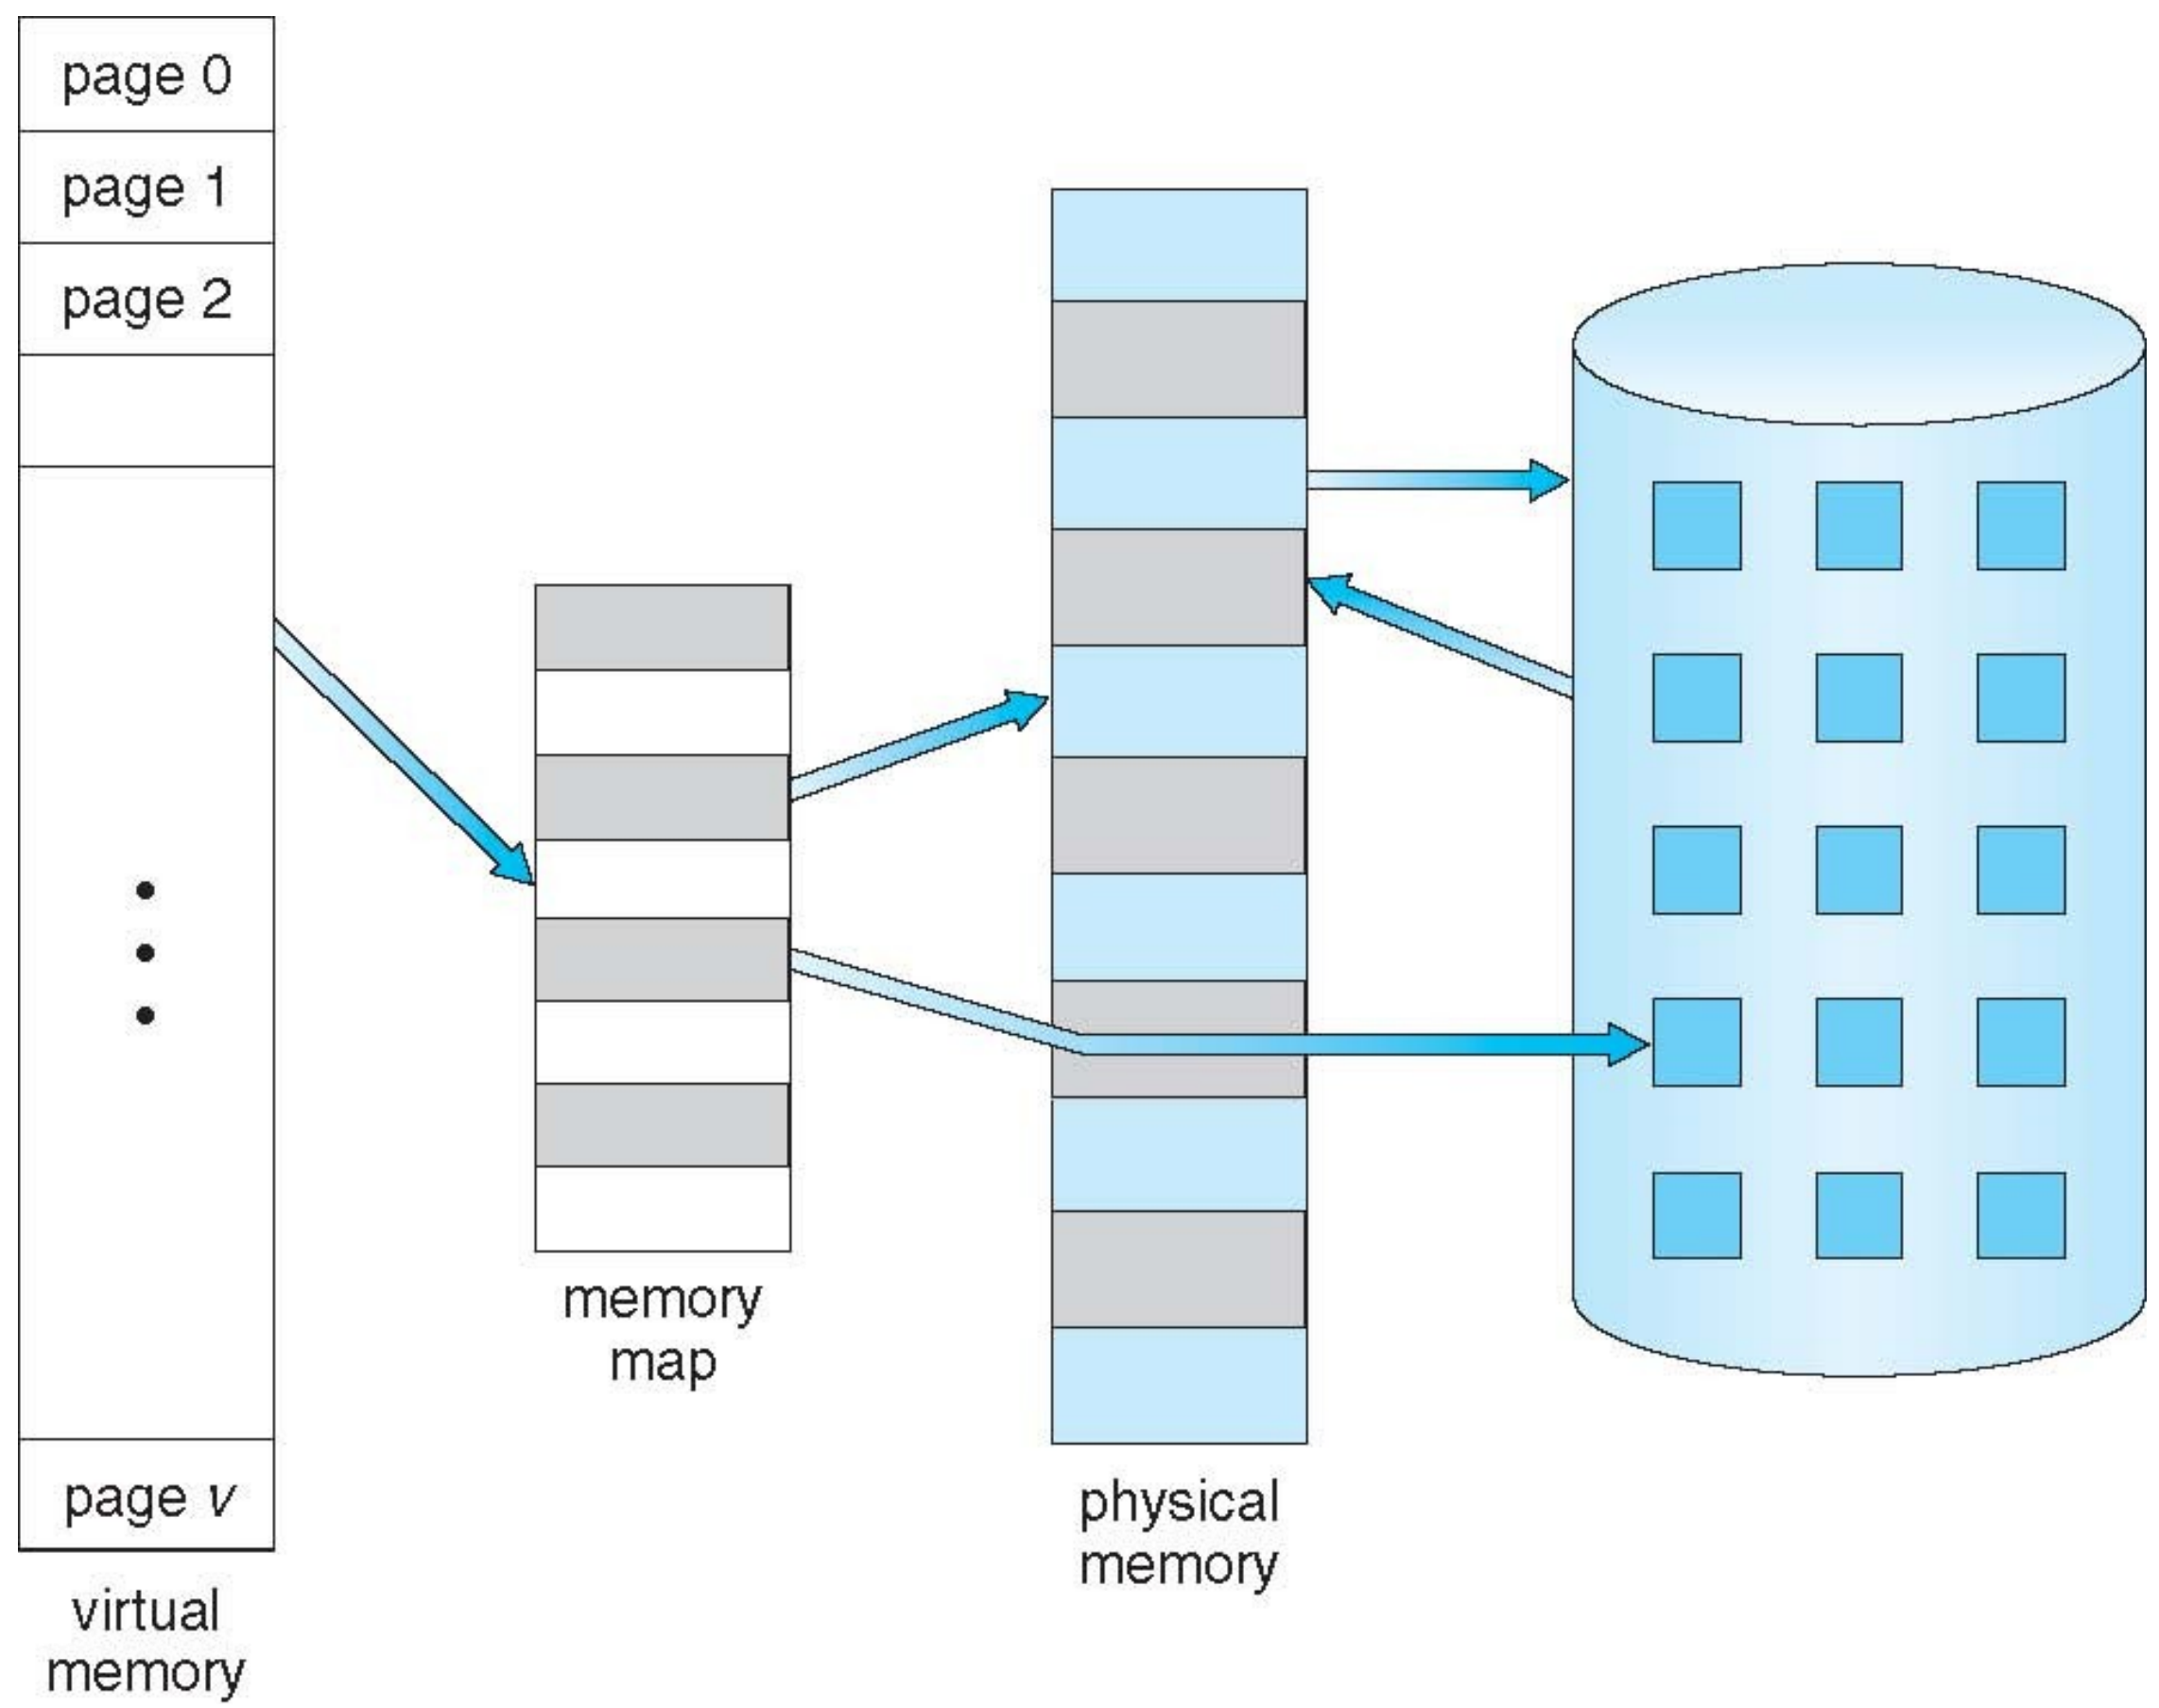

Virtual-address Space

- Usually design logical address space for stack to start at Max logical address and grow "down" while heap grows "up"
  - Maximizes address space use
  - Unused address space between the two is hole
    - No physical memory needed until heap or stack grows to a given new page
- Enables **sparse** address spaces with holes left for growth, dynamically linked libraries, etc
- System libraries shared via mapping into virtual address space
- Shared memory by mapping pages read-write into virtual address space
- Pages can be shared during `fork()`, speeding process creation

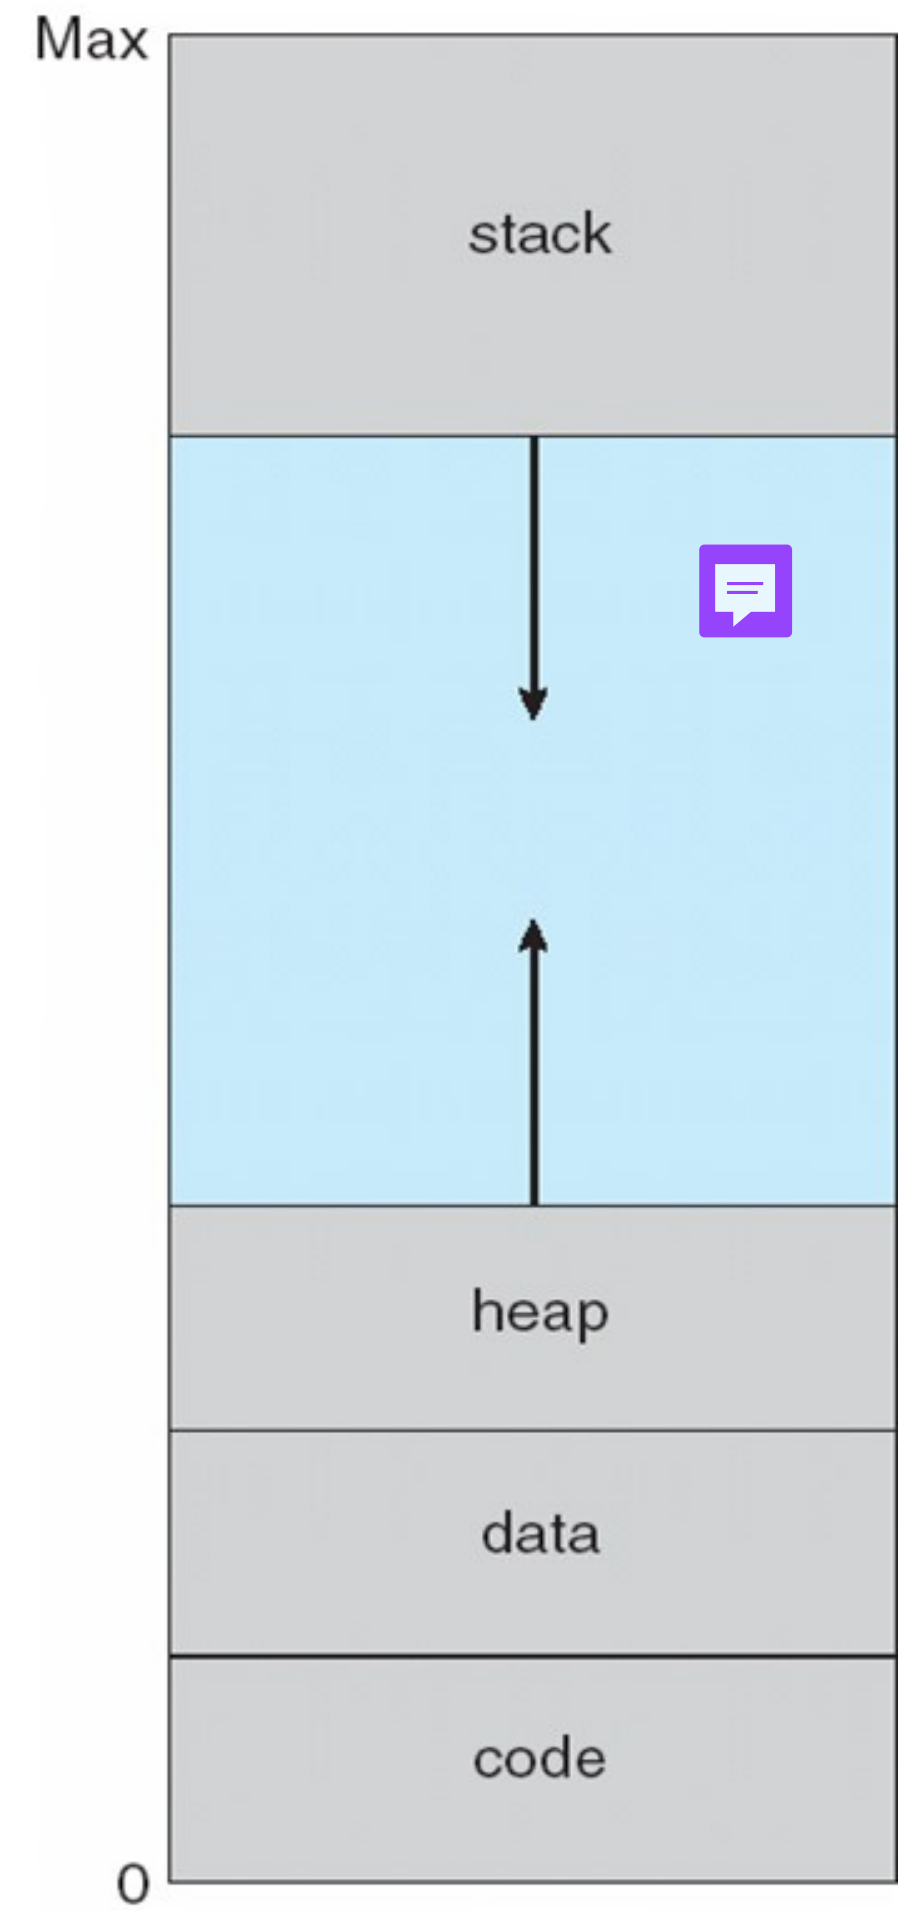

Shared Library Using Virtual Memory

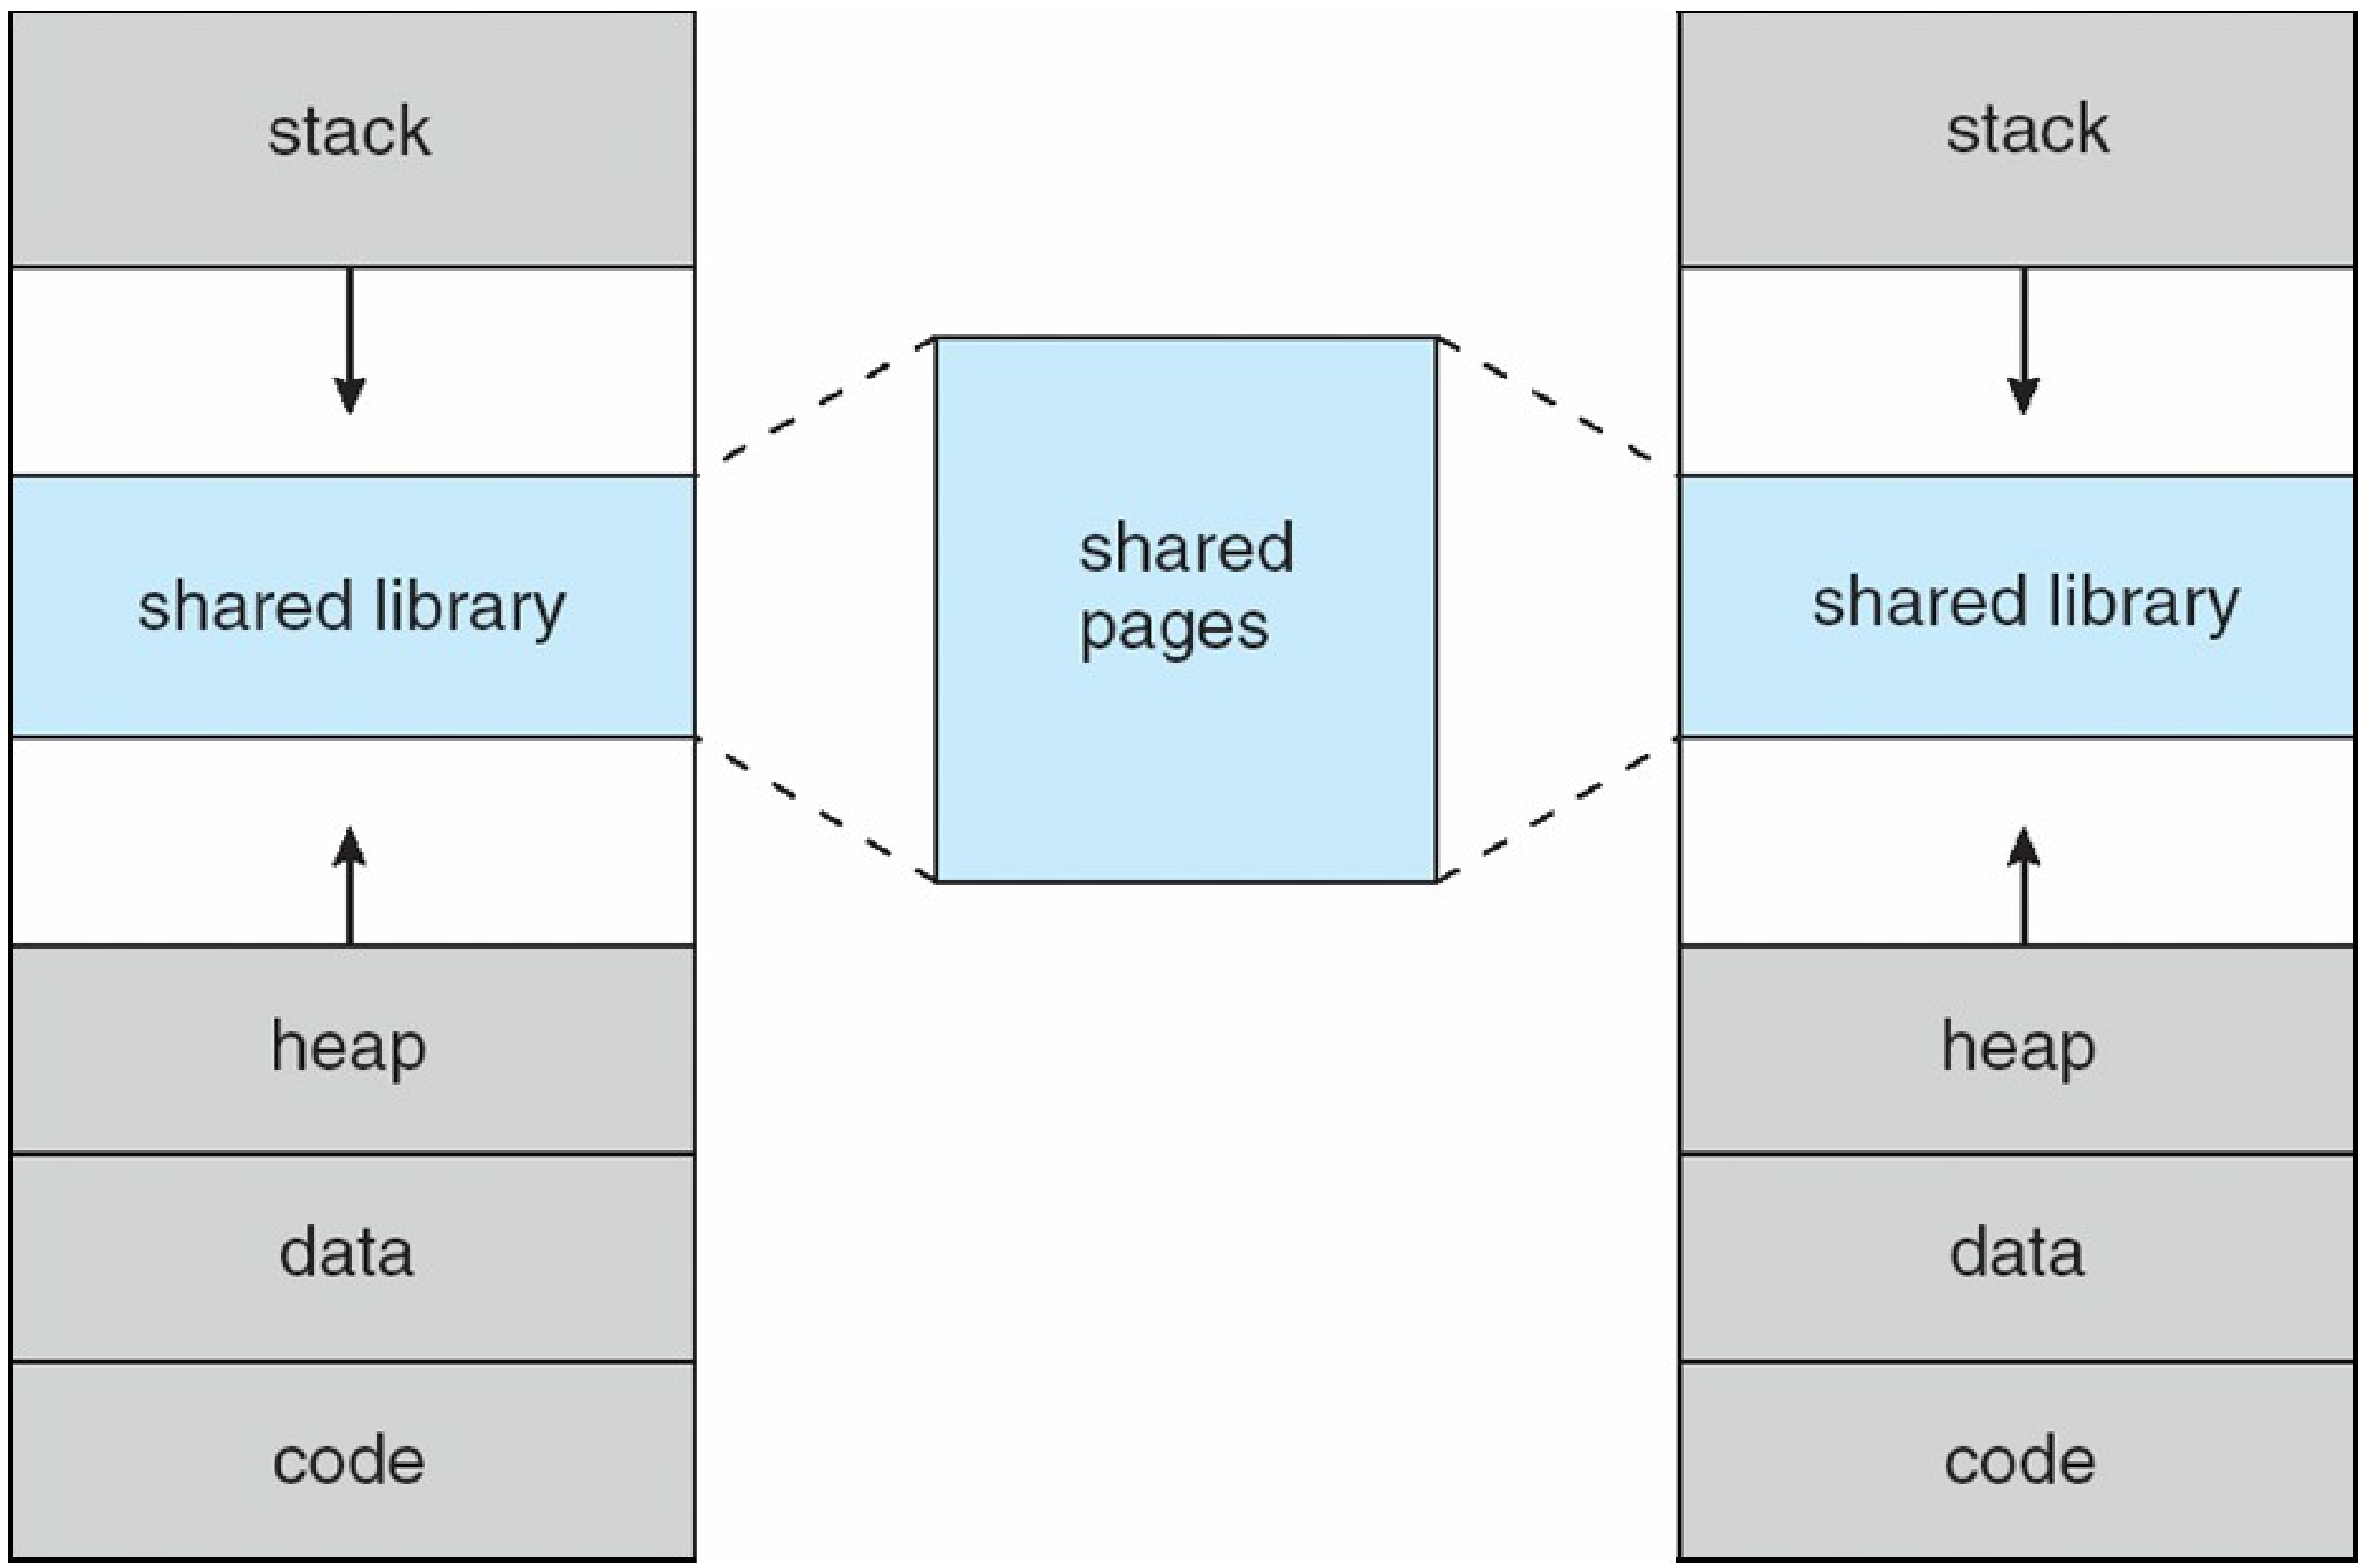

Demand Paging

- Could bring entire process into memory at load time
- Or bring a page into memory only when it is needed
  - Less I/O needed, no unnecessary I/O
  - Less memory needed
  - Faster response
  - More users
- Similar to paging system with swapping
- Page is needed ⇒ reference to it
  - invalid reference ⇒ abort
  - not-in-memory ⇒ bring to memory
- **Lazy swapper** – never swaps a page into memory unless page will be needed
  - Swapper that deals with pages is a **pager**

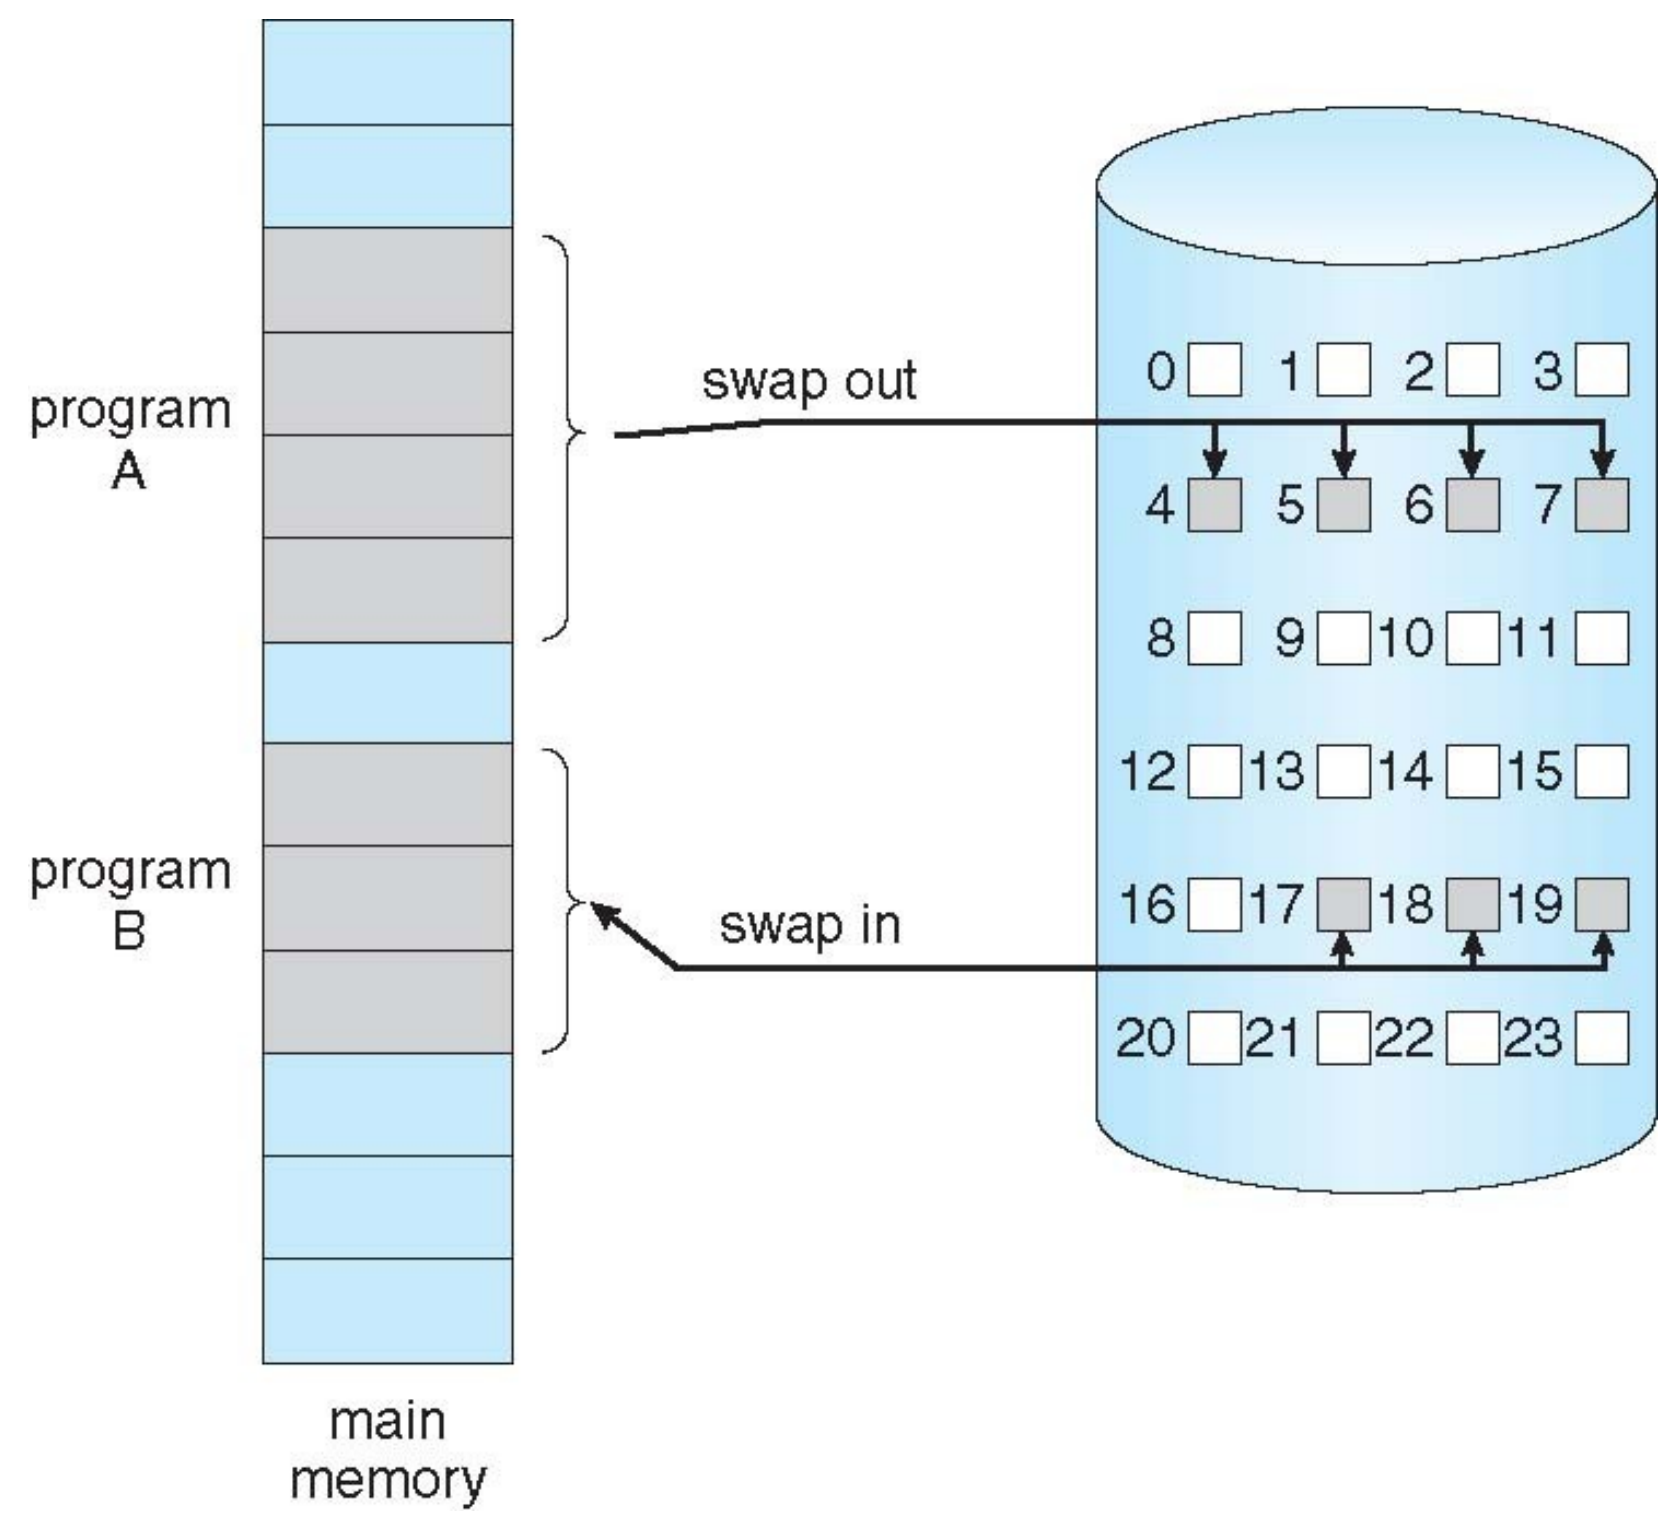

Basic Concepts

- With swapping, pager guesses which pages will be used before swapping out again
- pager brings in only those pages into memory
- How to determine that set of pages?
  - Need new MMU functionality to implement demand paging
- If pages needed are already **memory resident**
  - No difference from non demand-paging
- If page needed and not memory resident
  - Need to detect and load the page into memory from storage
    - Without changing program behavior
    - Without programmer needing to change code

Valid-Invalid Bit

- With each page table entry a valid–invalid bit is associated (**v** ⇒ in-memory – **memory resident**, **i** ⇒ not-in-memory)
- Initially valid–invalid bit is set to **i** on all entries
- Example of a page table snapshot:

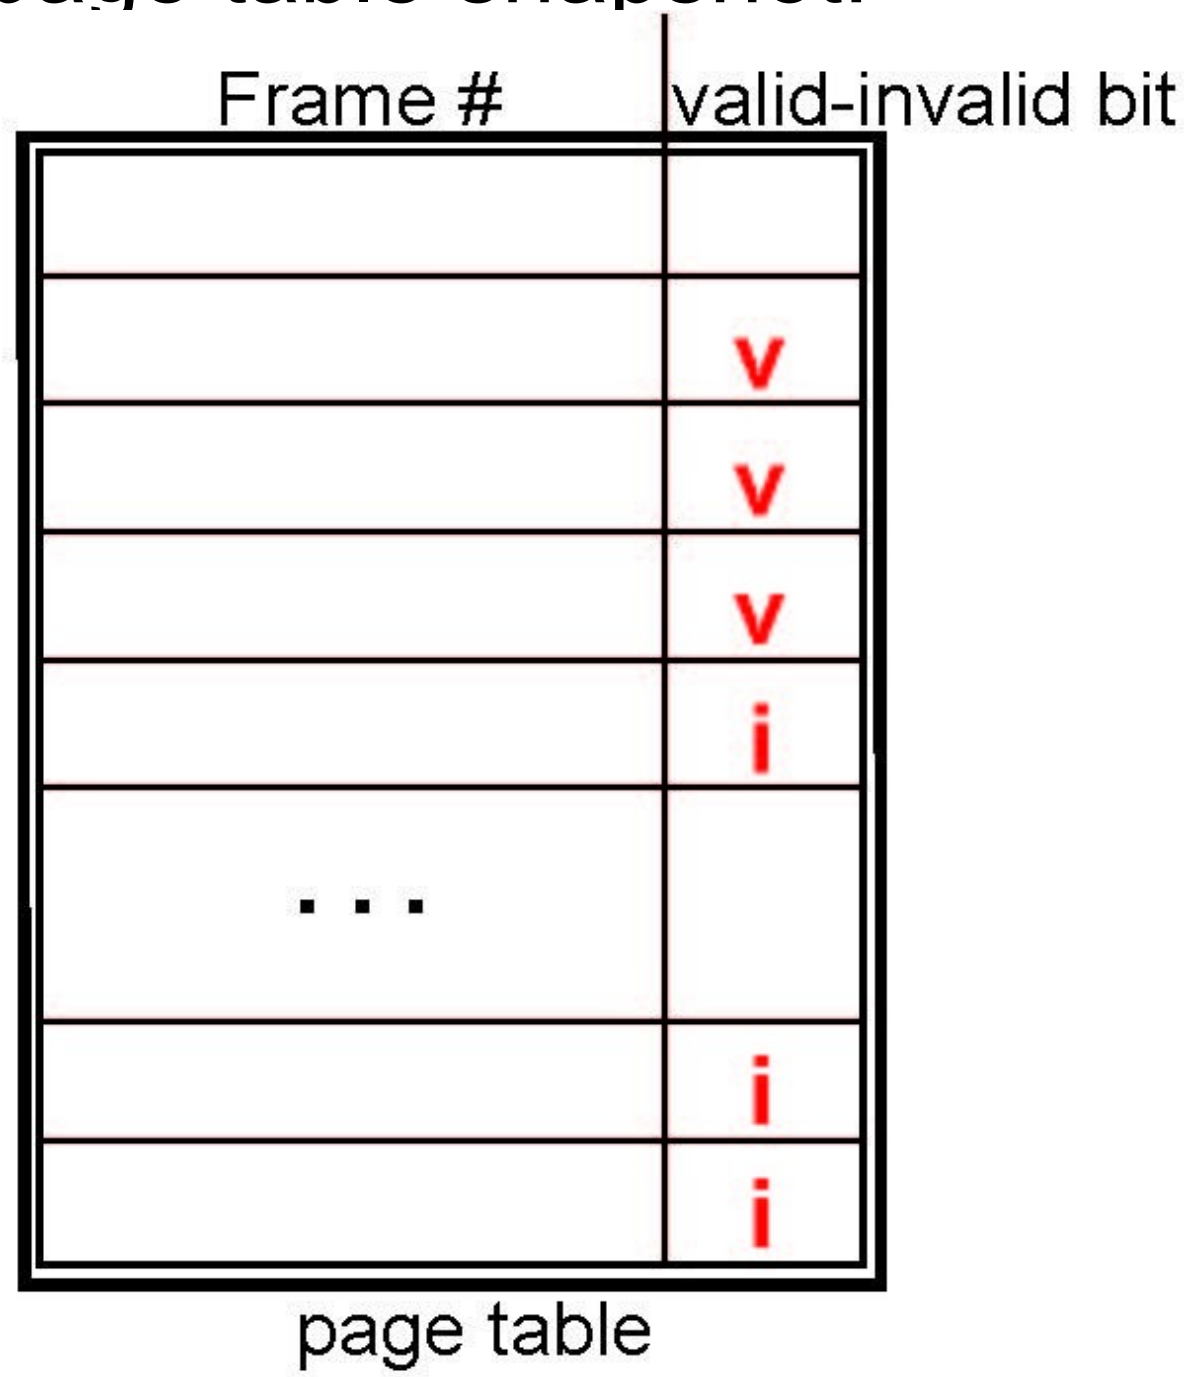

- During MMU address translation, if valid–invalid bit in page table entry is **i** ⇒ **page fault**

Page Table When Some Pages Are Not in Main Memory

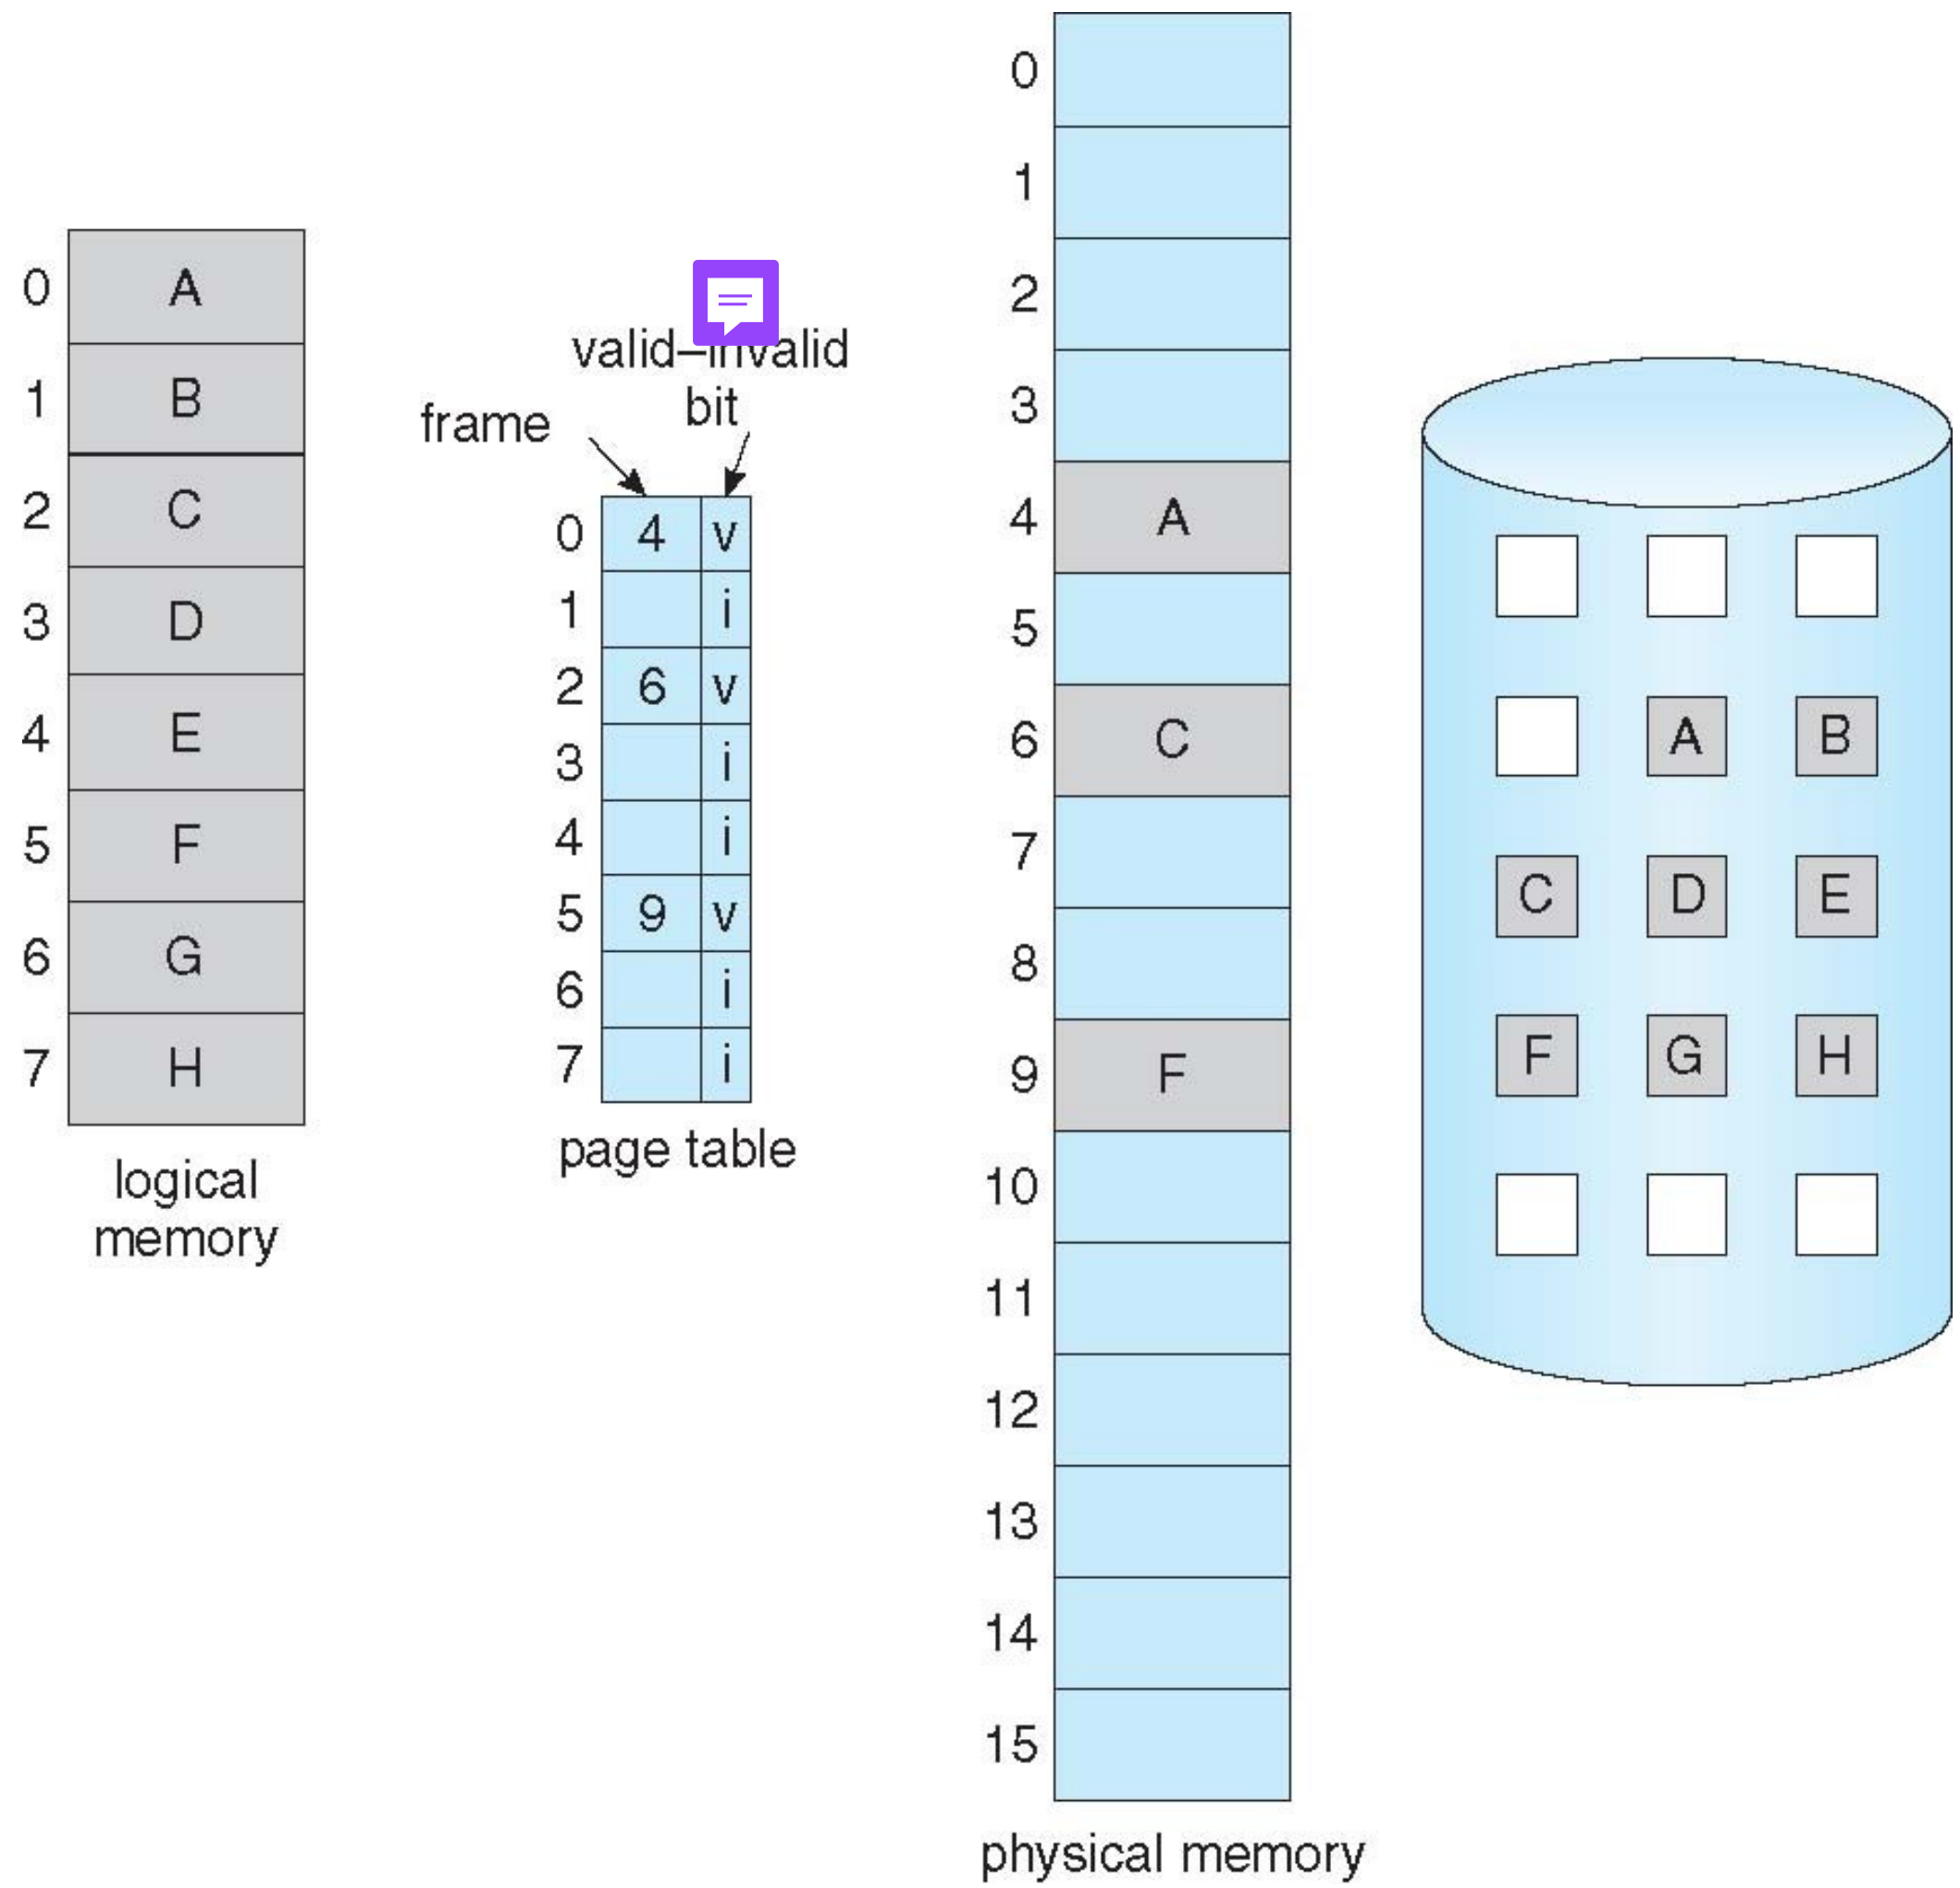

Page Fault

- If there is a reference to a page, first reference to that page will trap to operating system:

  page fault

1. Operating system looks at another table to decide:
   - Invalid reference ⇒ abort
   - Just not in memory
2. Find free frame
3. Swap page into frame via scheduled disk operation
4. Reset tables to indicate page now in memory
   Set validation bit = **v**
5. Restart the instruction that caused the page fault

Steps in Handling a Page Fault

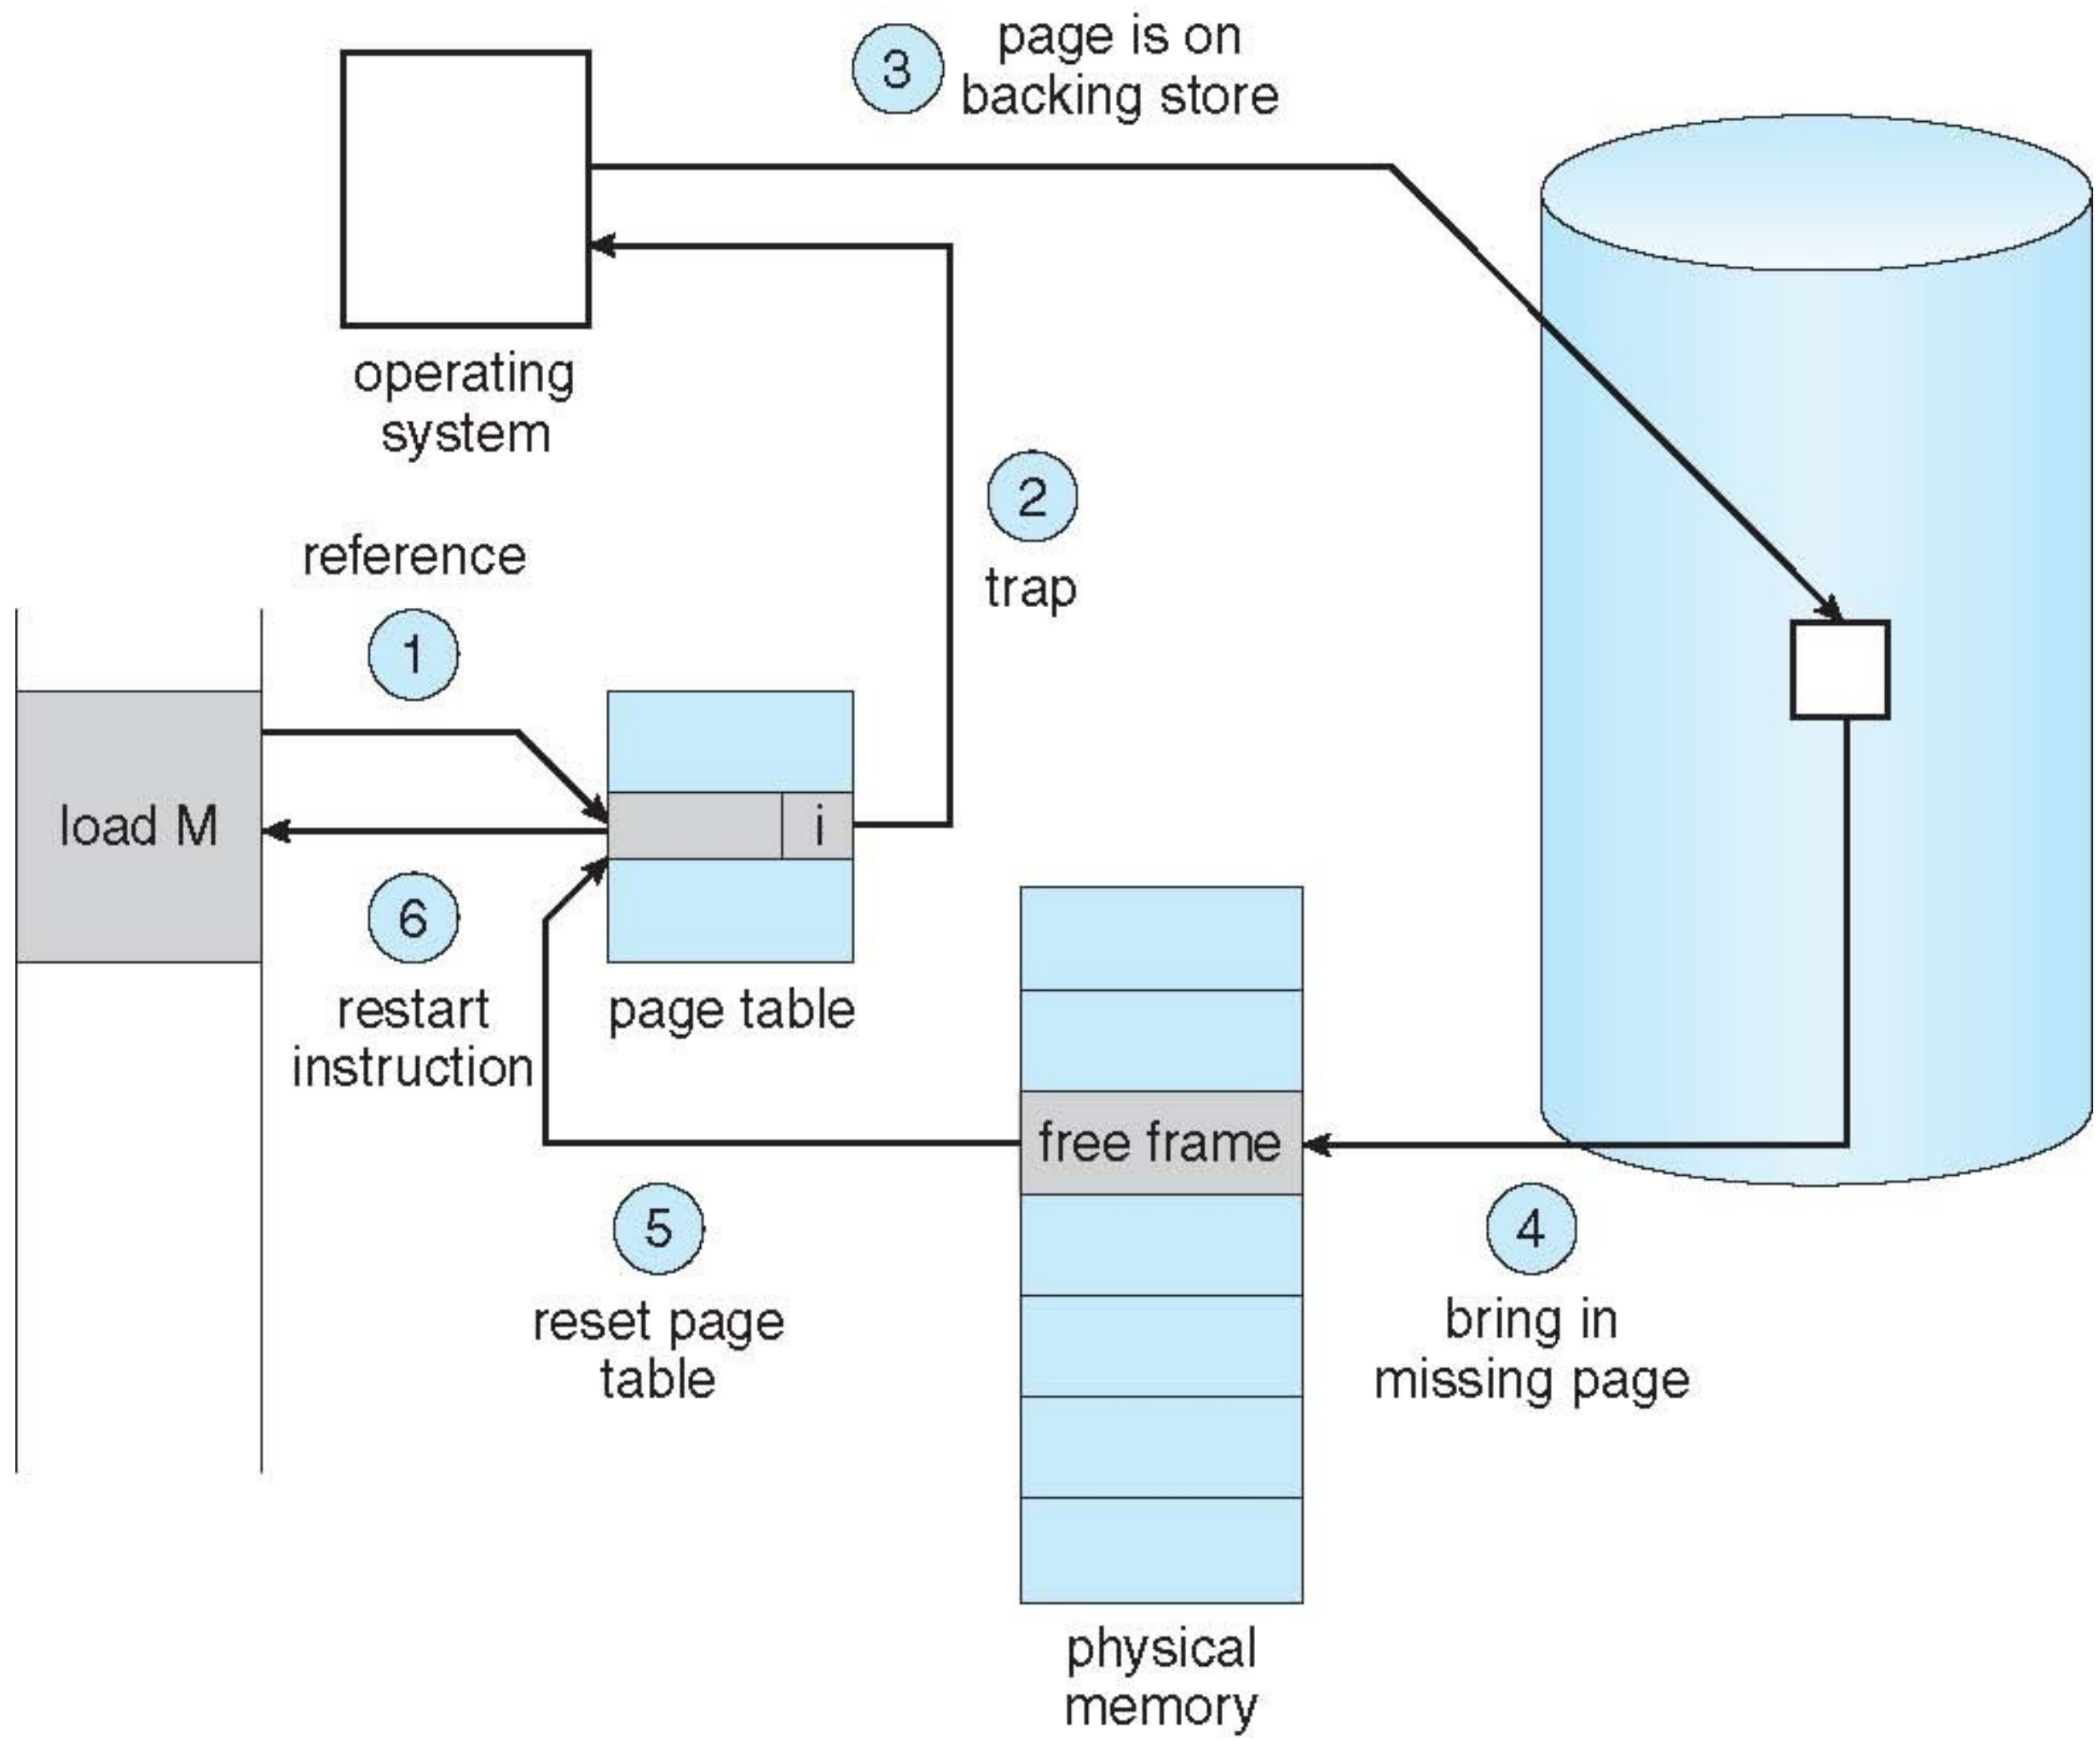

Aspects of Demand Paging

- Extreme case – start process with *no* pages in memory
  - OS sets instruction pointer to first instruction of process, non-memory-resident -> page fault
  - And for every other process pages on first access
    - **Pure demand paging**
- Actually, a given instruction could access multiple pages -> multiple page faults
  - Consider fetch and decode of instruction which adds 2 numbers from memory and stores result back to memory
  - Pain decreased because of **locality of reference**
- Hardware support needed for demand paging
  - Page table with valid / invalid bit
  - Secondary memory (swap device with **swap space**)
  - Instruction restart

sum = a + b

P_0 P_1 P_2

Copy-on-Write

- **Copy-on-Write** (COW) allows both parent and child processes to initially ***share*** the same pages in memory
  - If either process modifies a shared page, only then is the page copied
- COW allows more efficient process creation as only modified pages are copied
- `vfork()` variation on `fork()` system call has parent suspend and child using address space of parent
  - Designed to have child call `exec()`
  - Very efficient
  - Ex. for programming a shell

Before Process 1 Modifies Page C

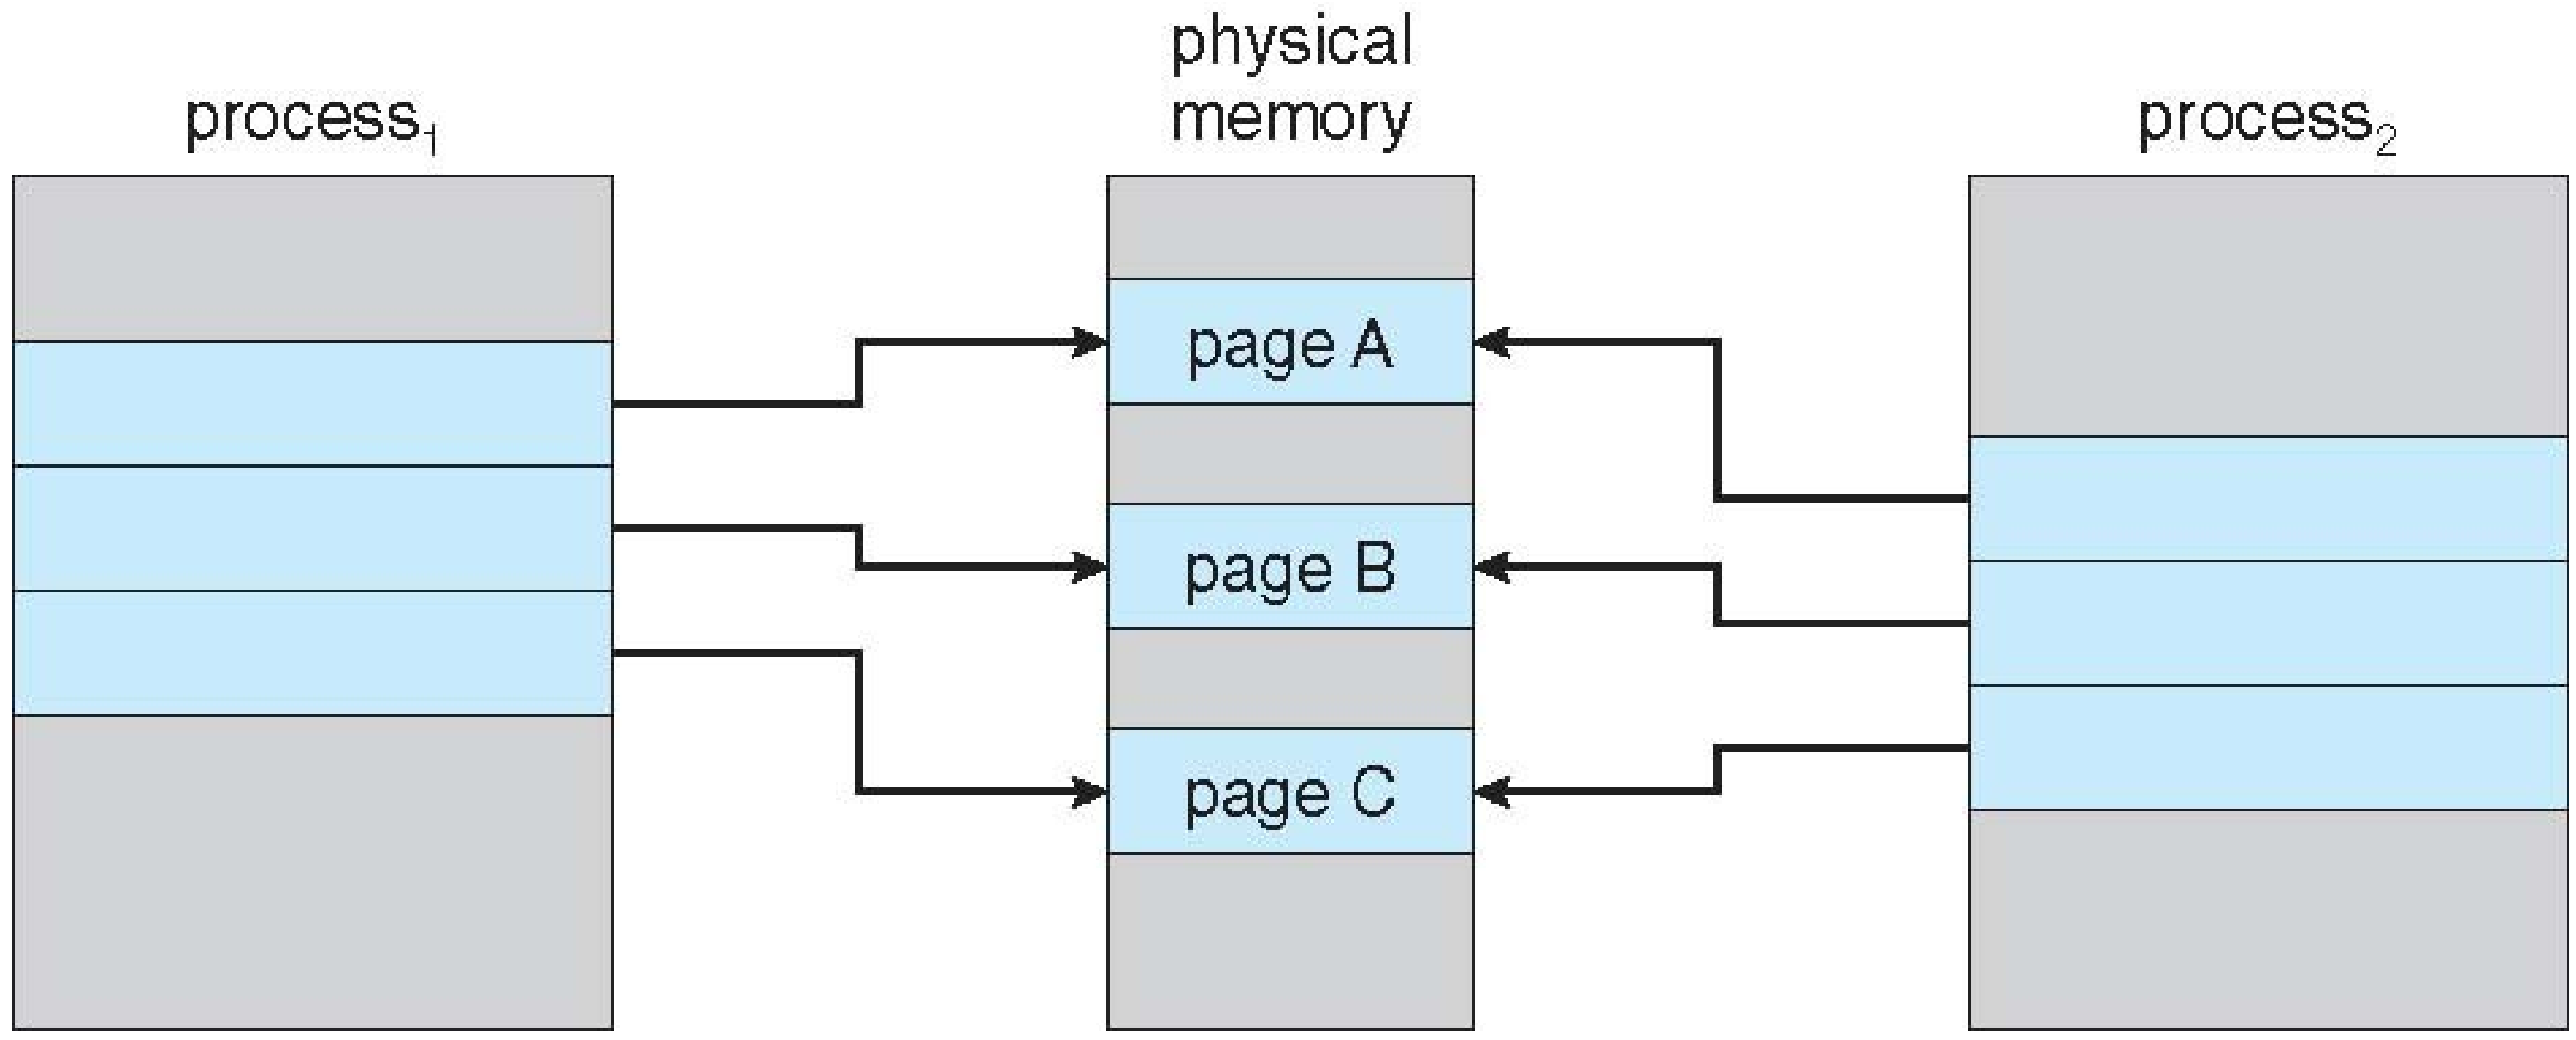

After Process 1 Modifies Page C

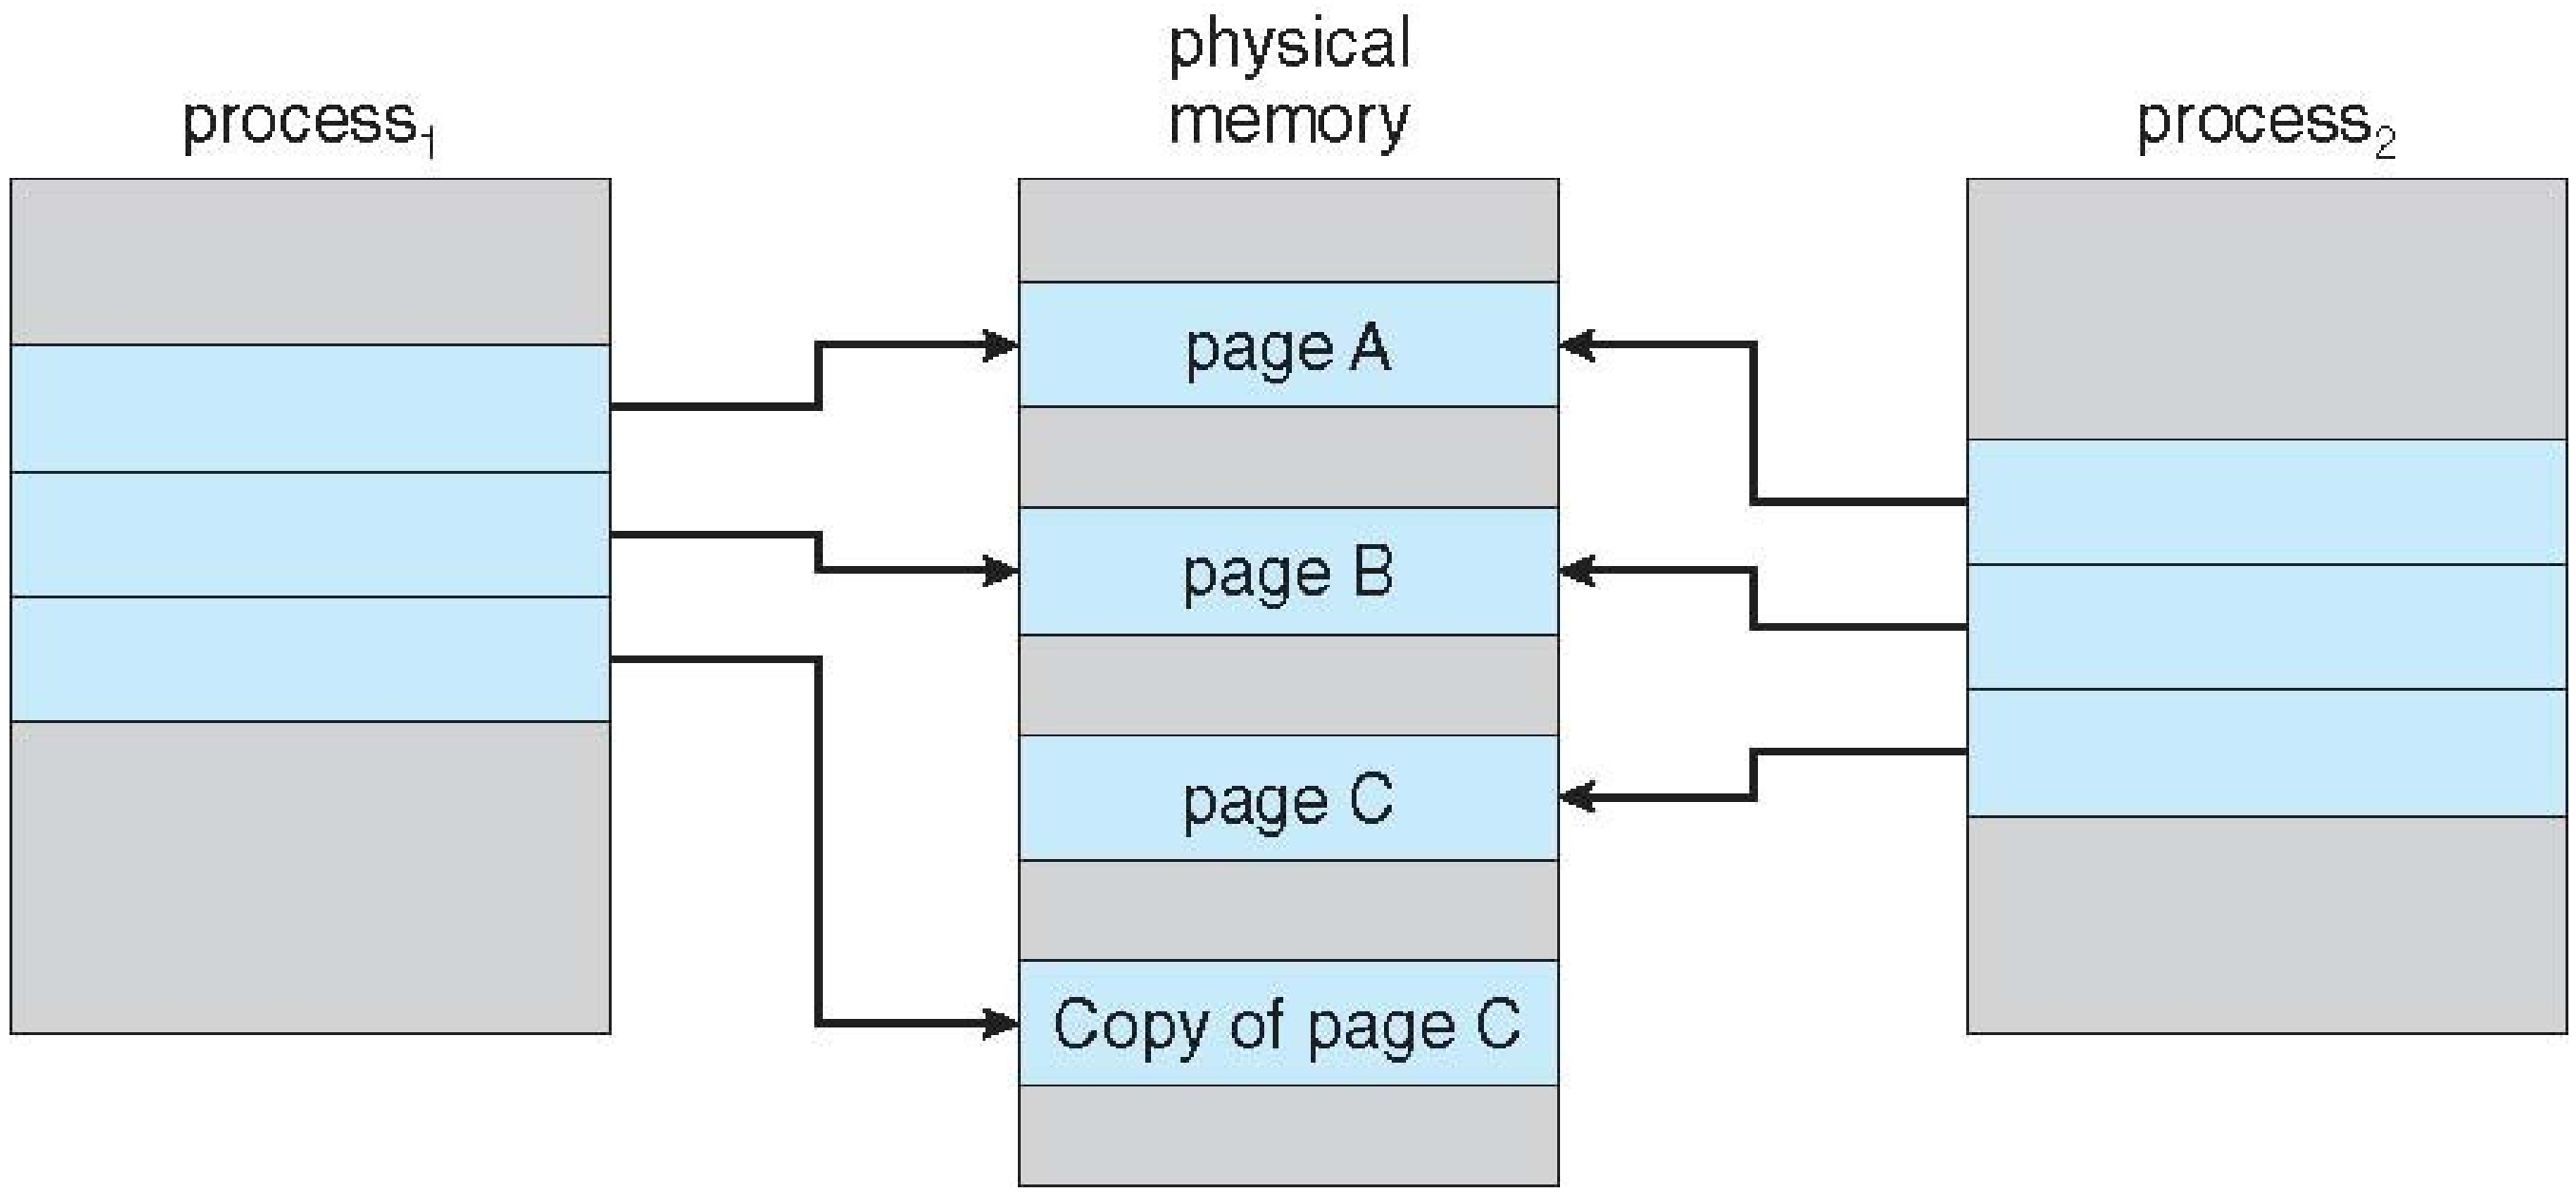

What Happens if There is no Free Frame?

- Used up by process pages
- Also in demand from the kernel, I/O buffers, etc
- How much to allocate to each?
- Page replacement – find some page in memory, but not really in use, page it out
  - Algorithm – terminate? swap out? replace the page?
  - Performance – want an algorithm which will result in minimum number of page faults
- Same page may be brought into memory several times

Page Replacement

- Prevent **over-allocation** of memory by modifying page-fault service routine to include page replacement
- Use **modify (dirty) bit** to reduce overhead of page transfers – only modified pages are written to disk
- Page replacement completes separation between logical memory and physical memory – large virtual memory can be provided on a smaller physical memory

Need For Page Replacement

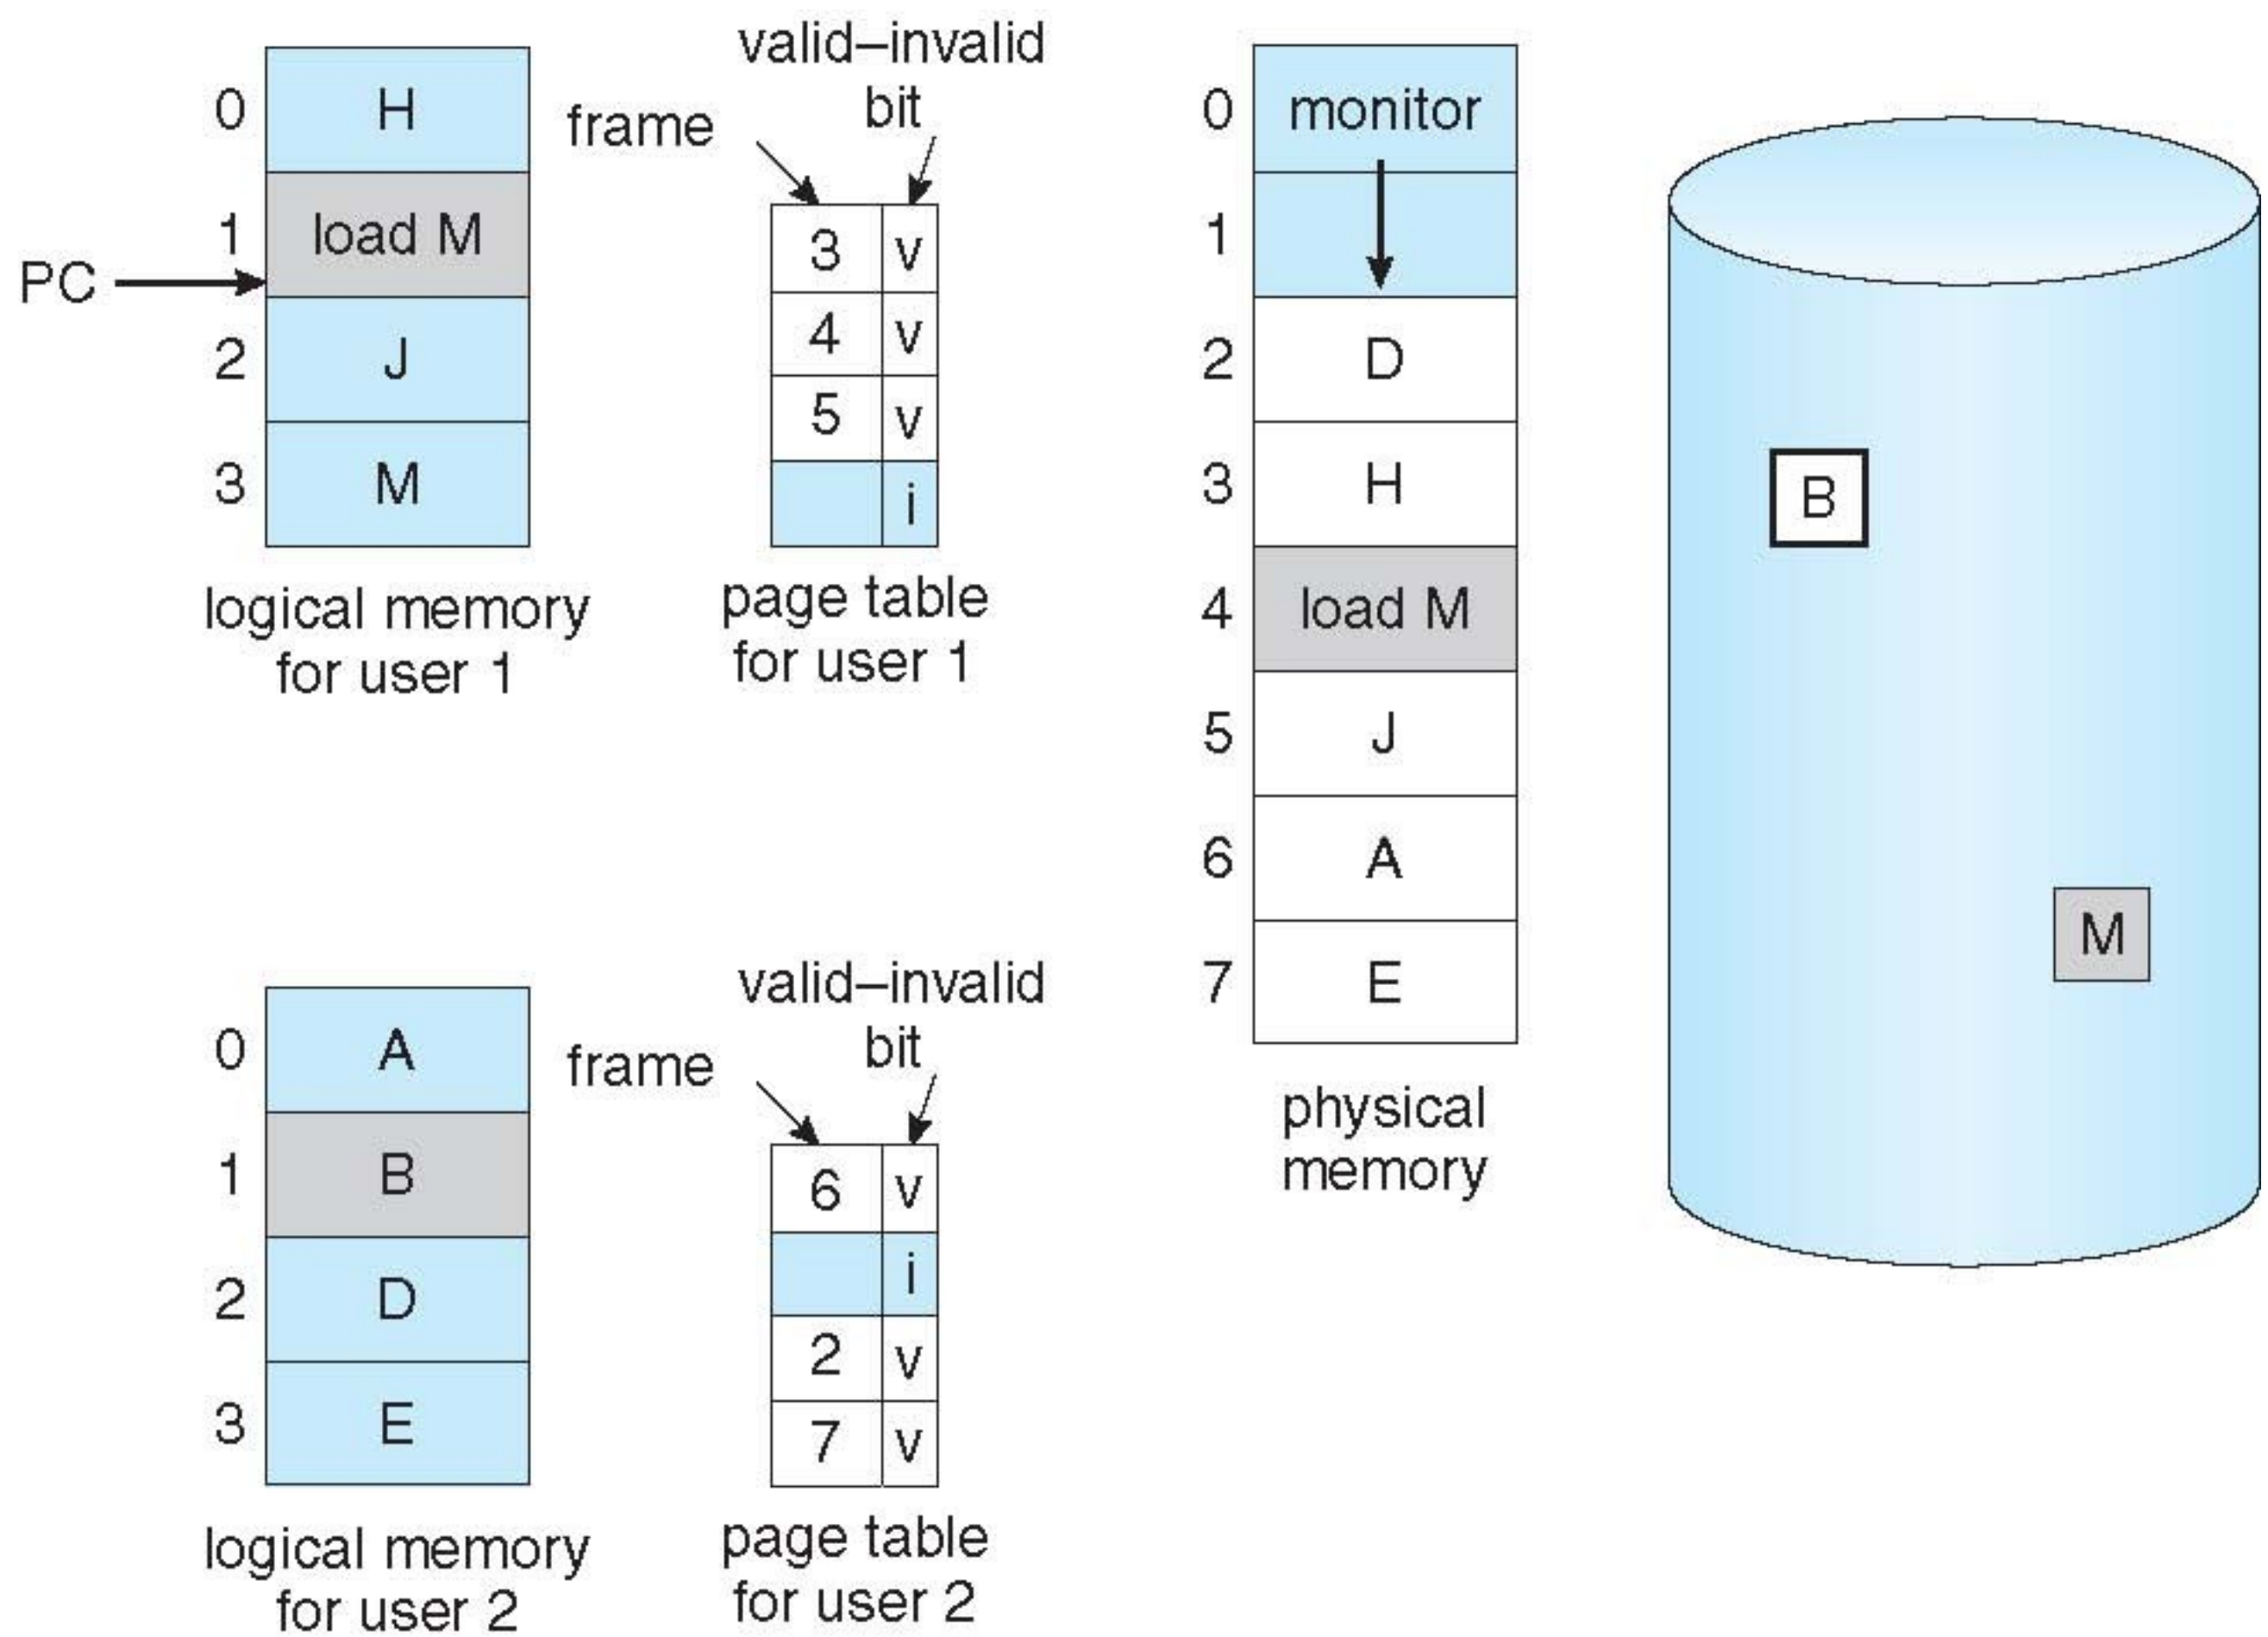

Basic Page Replacement

1. Find the location of the desired page on disk

2. Find a free frame:
   - If there is a free frame, use it
   - If there is no free frame, use a page replacement algorithm to select a **victim frame**
     - Write victim frame to disk if dirty

3. Bring the desired page into the (newly) free frame; update the page and frame tables

4. Continue the process by restarting the instruction that caused the trap

Note now potentially 2 page transfers for page fault

Page Replacement

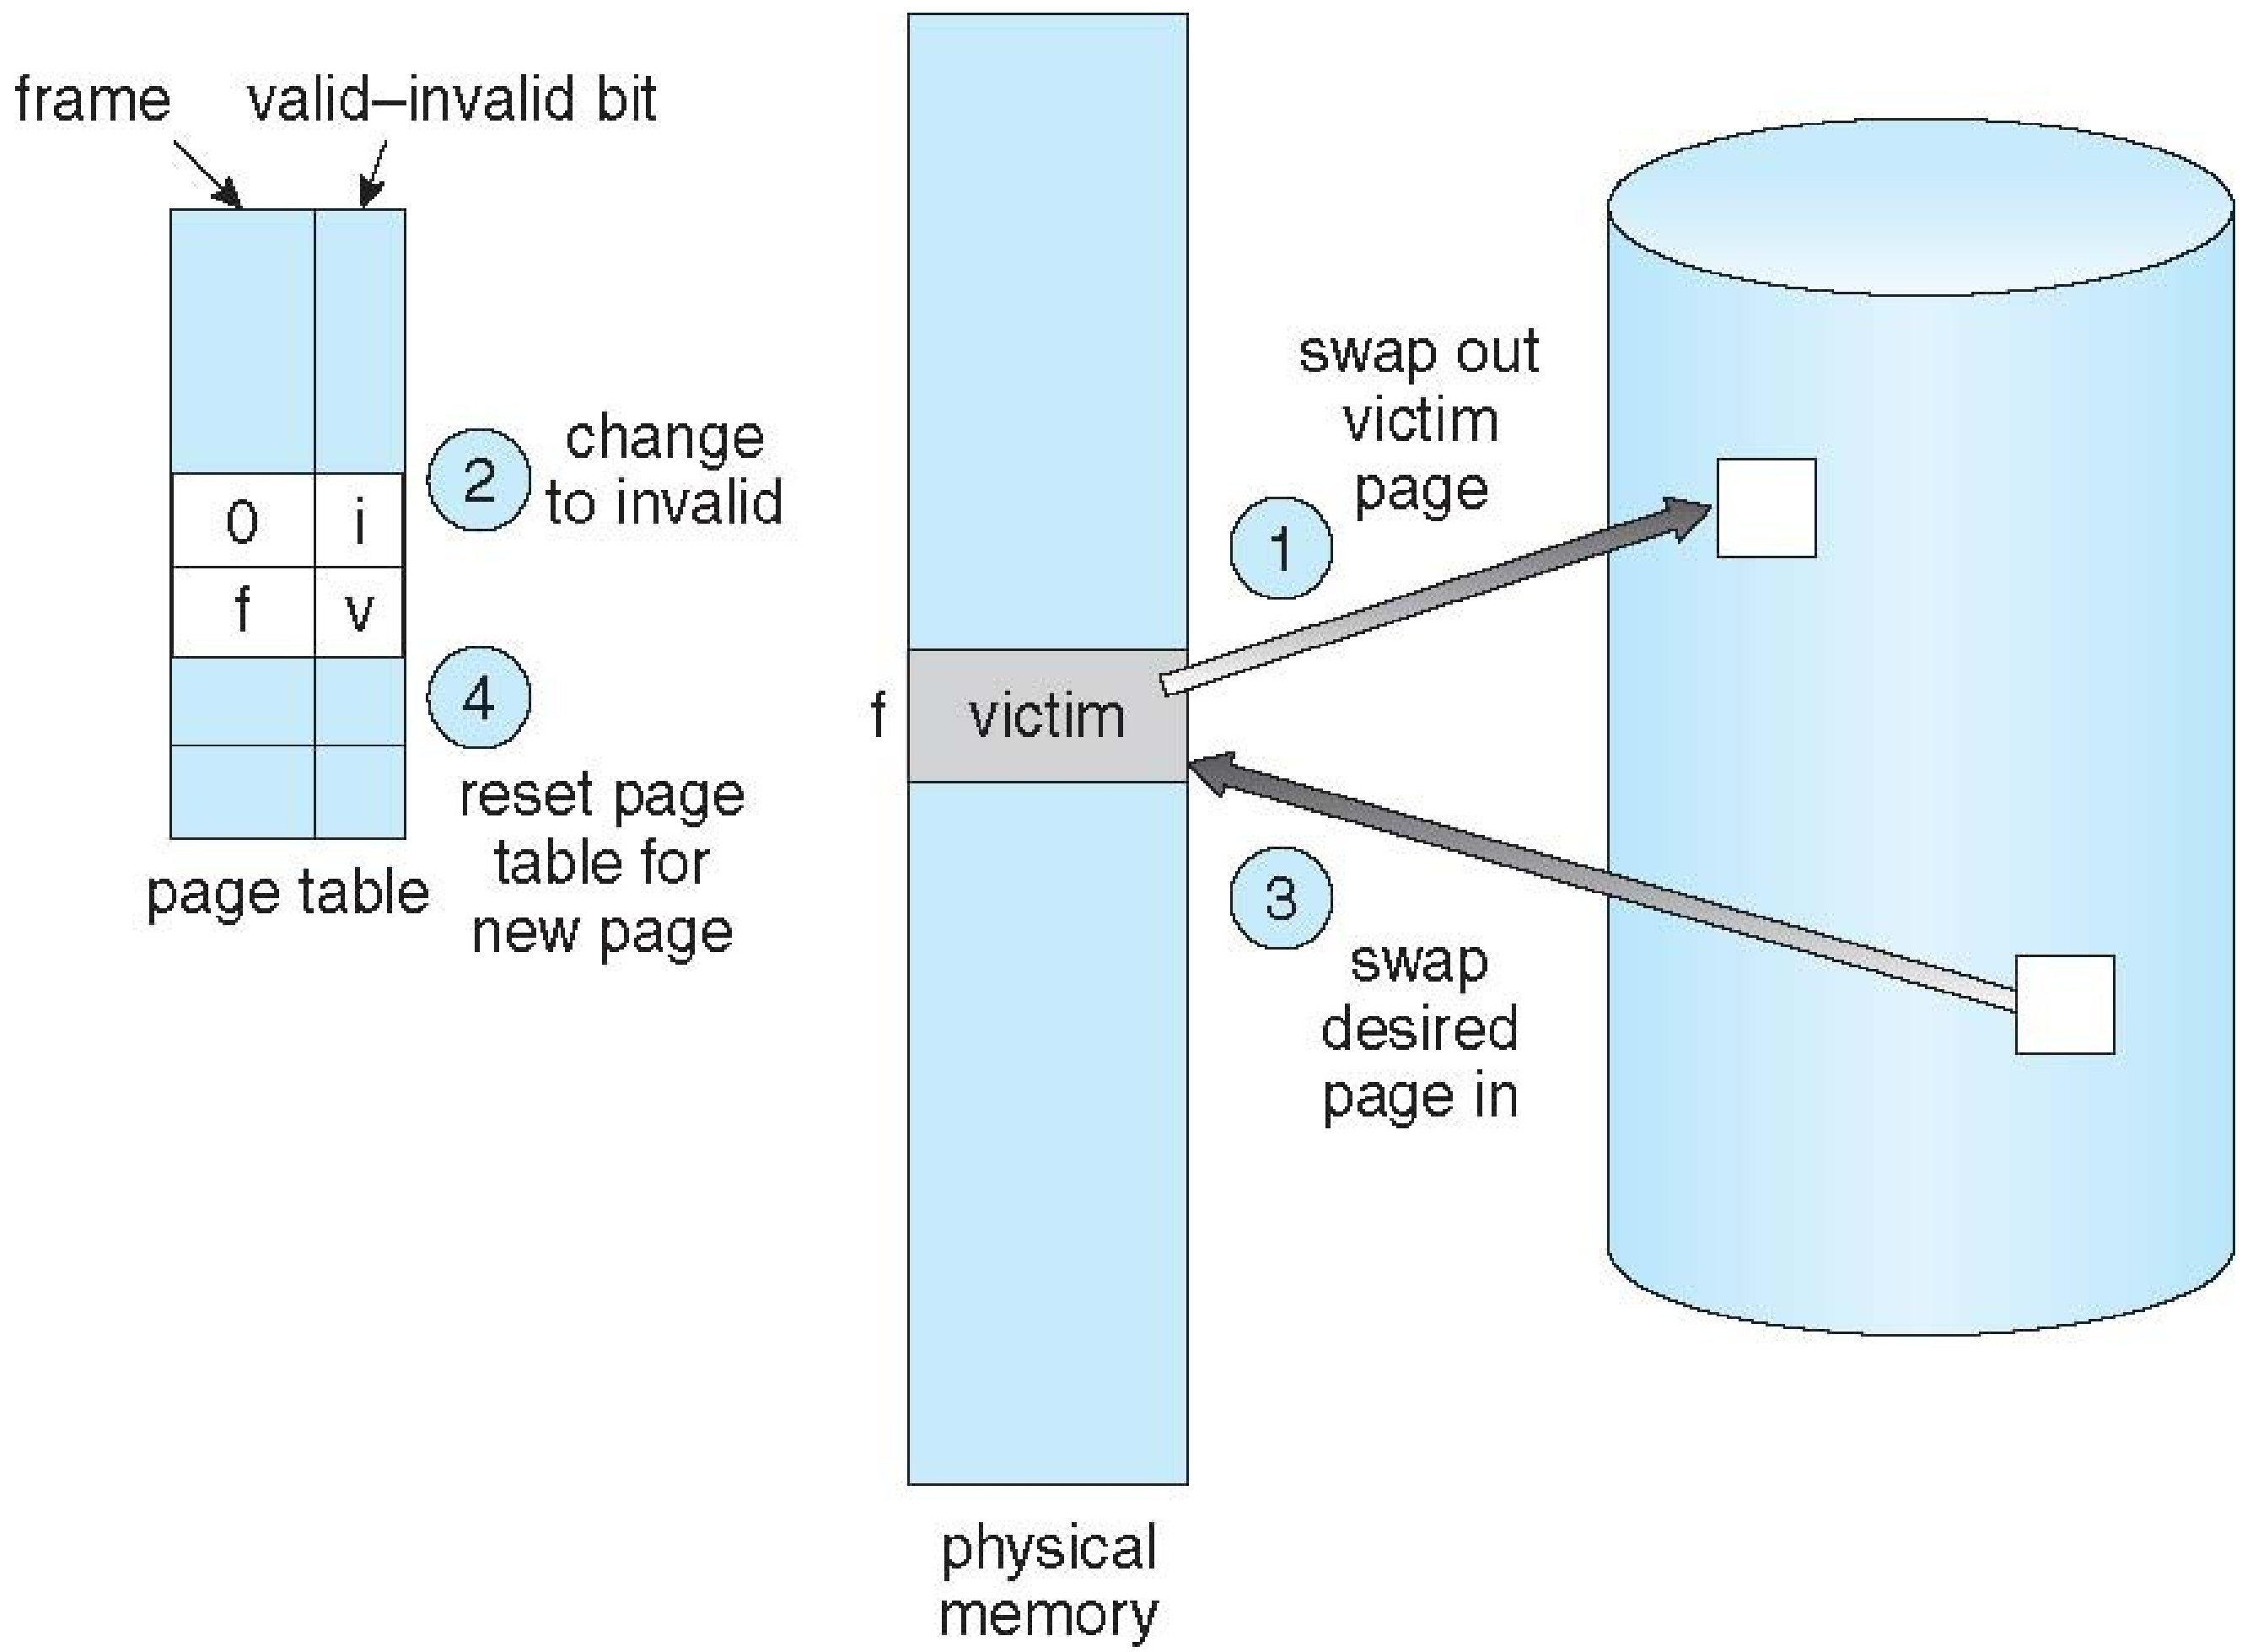

Page and Frame Replacement Algorithms

- **Frame-allocation algorithm** determines
  - How many frames to give each process
  - Which frames to replace
- **Page-replacement algorithm**
  - Want lowest page-fault rate on both first access and re-access
- Evaluate algorithm by running it on a particular string of memory references (reference string) and computing the number of page faults on that string
  - String is just page numbers, not full addresses
  - Repeated access to the same page does not cause a page fault
  - Results depend on number of frames available
- In all our examples, the **reference string** of referenced page numbers is

7,0,1,2,0,3,0,4,2,3,0,3,0,3,2,1,2,0,1,7,0,1

Graph of Page Faults Versus The Number of Frames

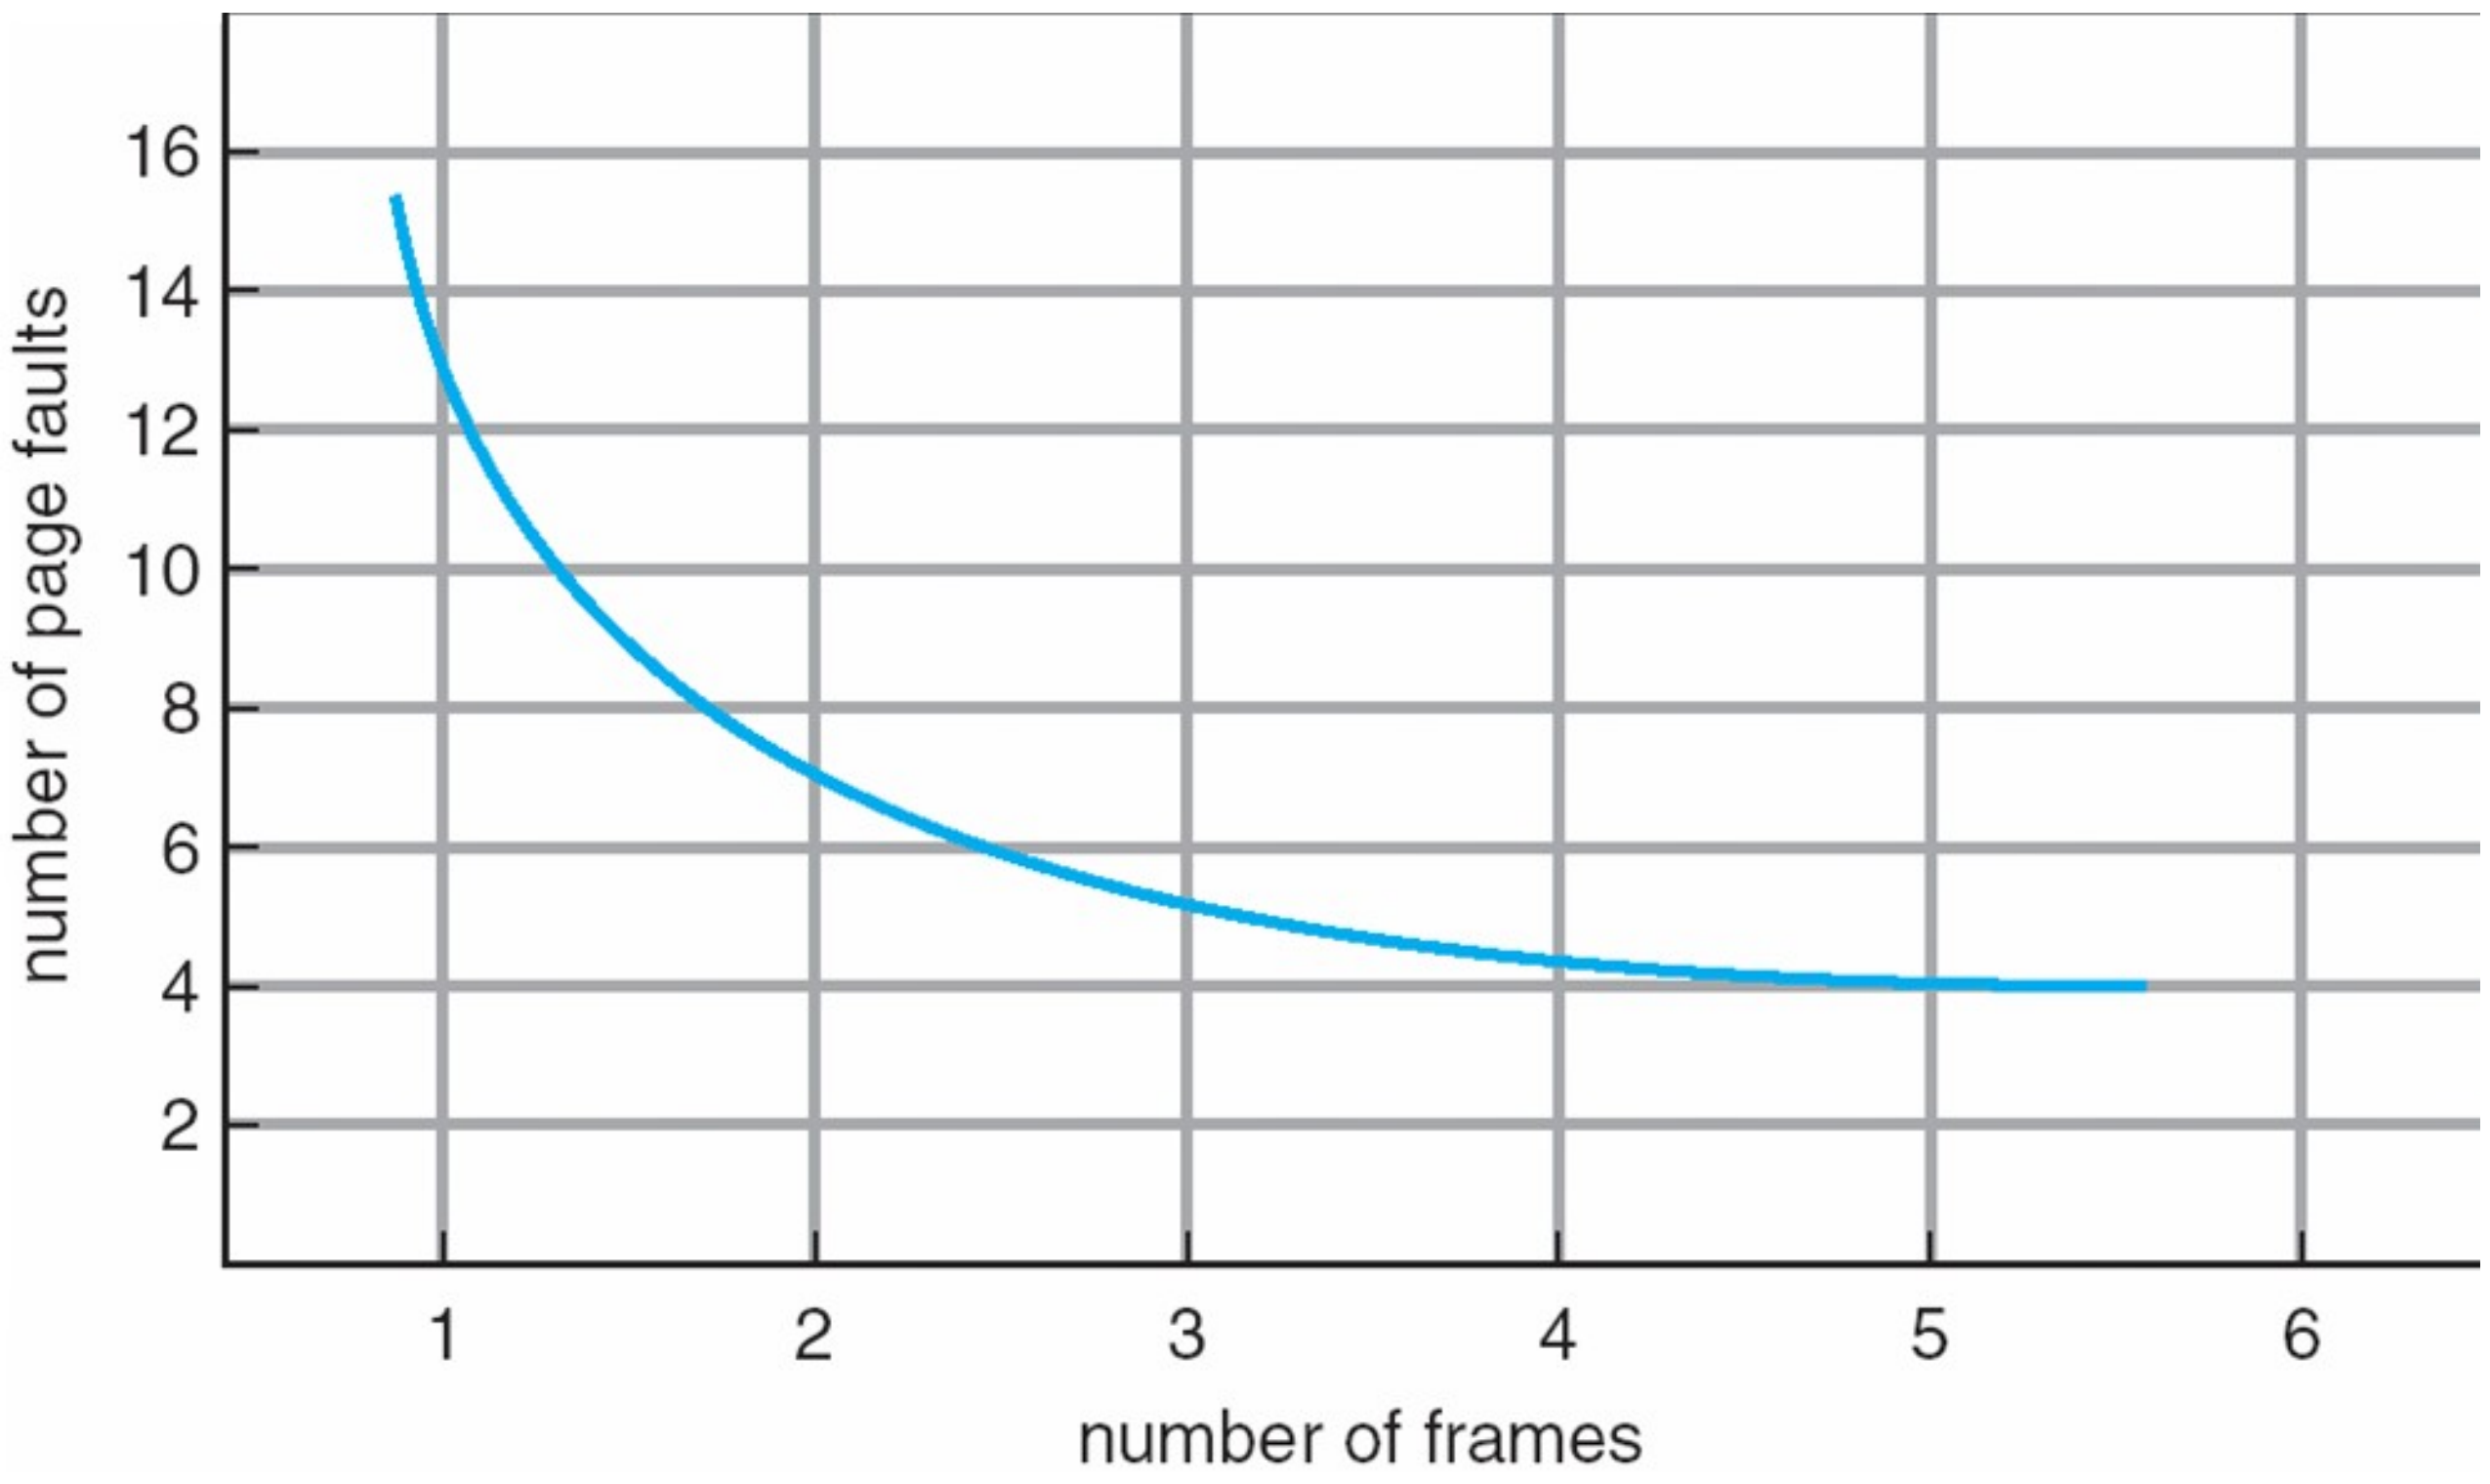

First-In-First-Out (FIFO) Algorithm

- Reference string: **7,0,1,2,0,3,0,4,2,3,0,3,0,3,2,1,2,0,1,7,0,1**
- 3 frames (3 pages can be in memory at a time per process)

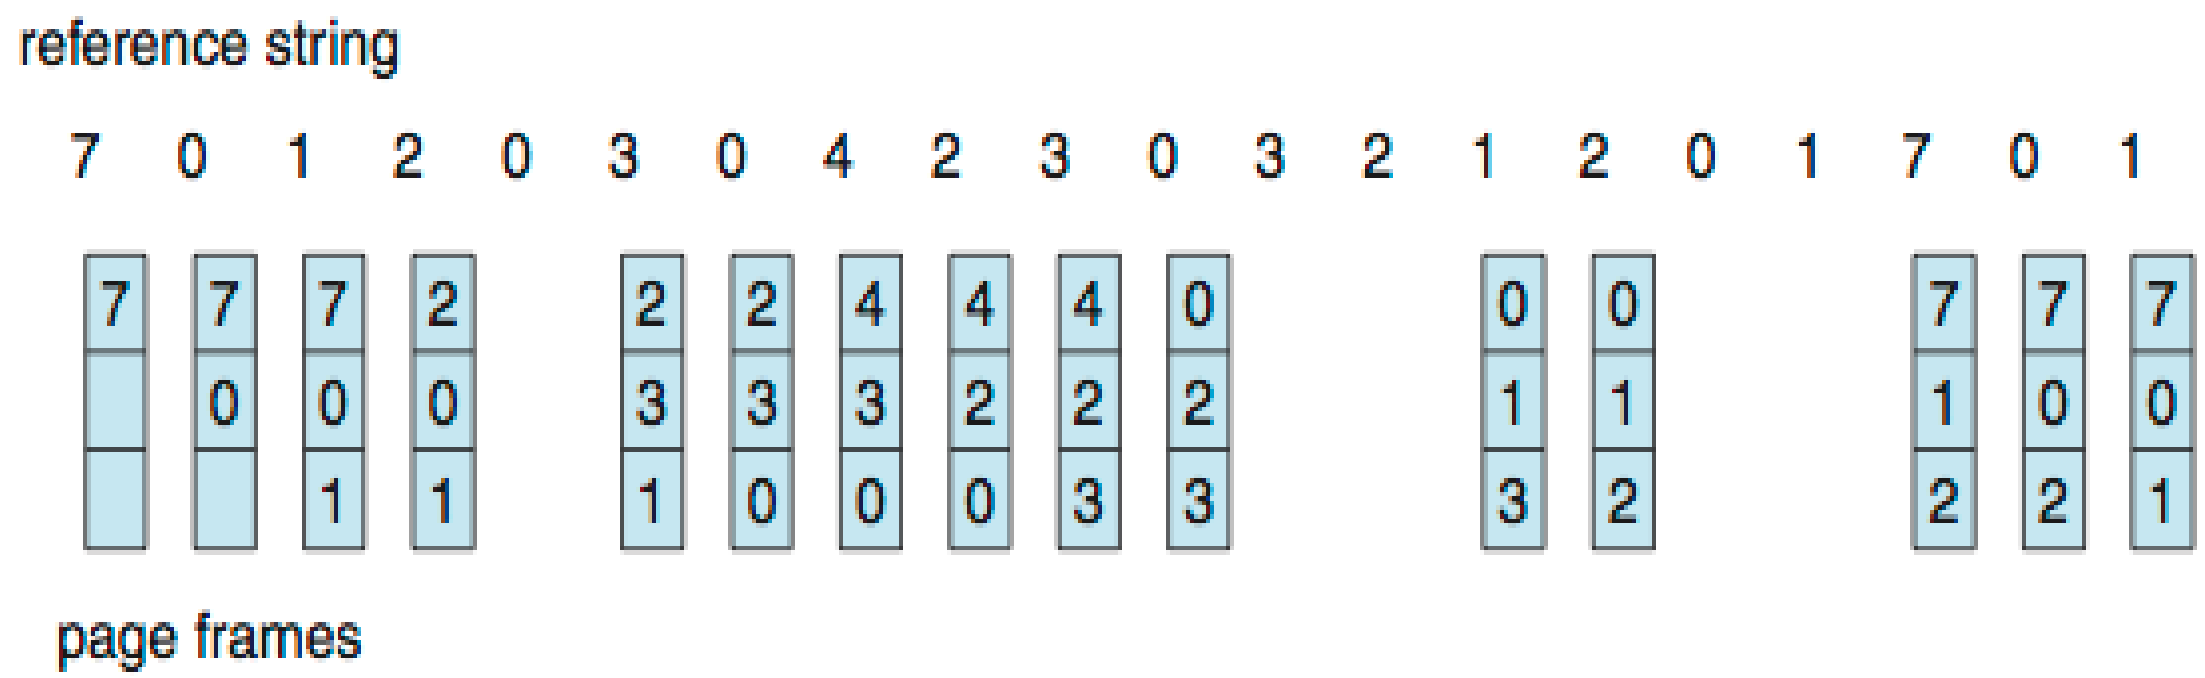

15 page faults

- Can vary by reference string: consider 1,2,3,4,1,2,5,1,2,3,4,5
  - Adding more frames can cause more page faults!
    - **Belady's Anomaly**
- How to track ages of pages?
  - Just use a FIFO queue

FIFO Illustrating Belady's Anomaly

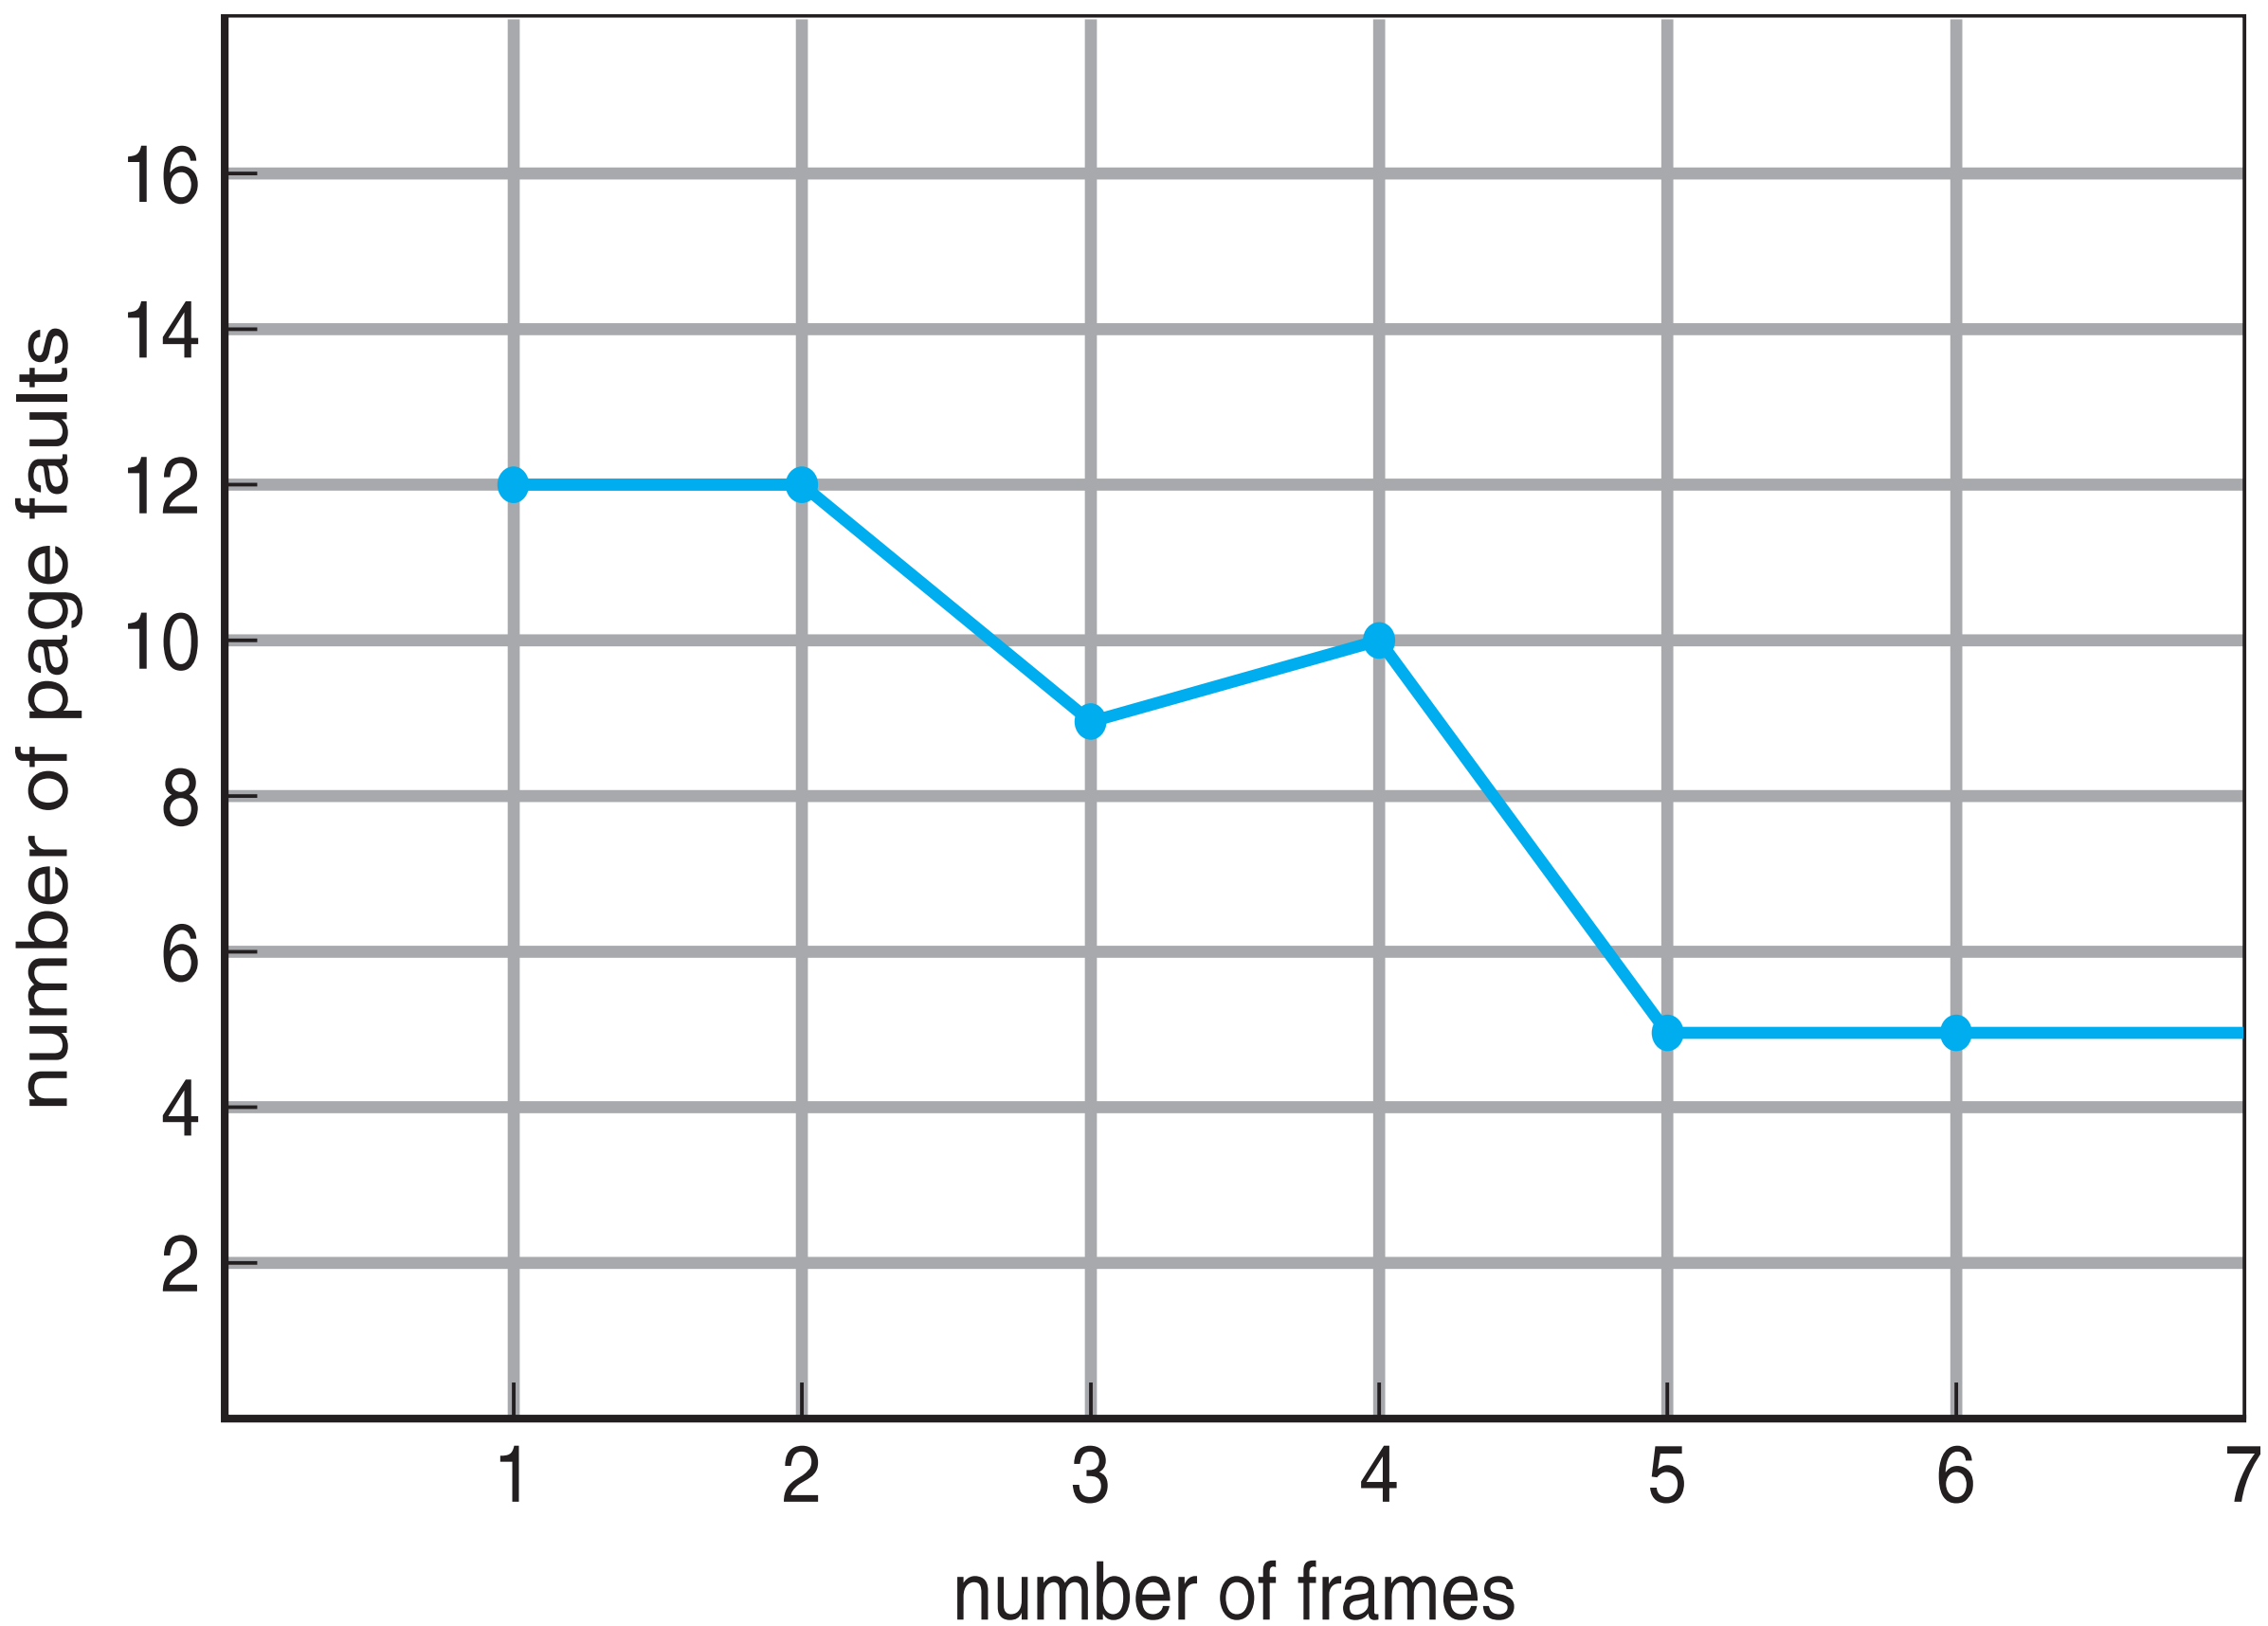

Optimal Algorithm

- Replace page that will not be used for longest period of time
  - 9 is optimal for the example
- How do you know this?
  - Can’t read the future
- Used for measuring how well your algorithm performs

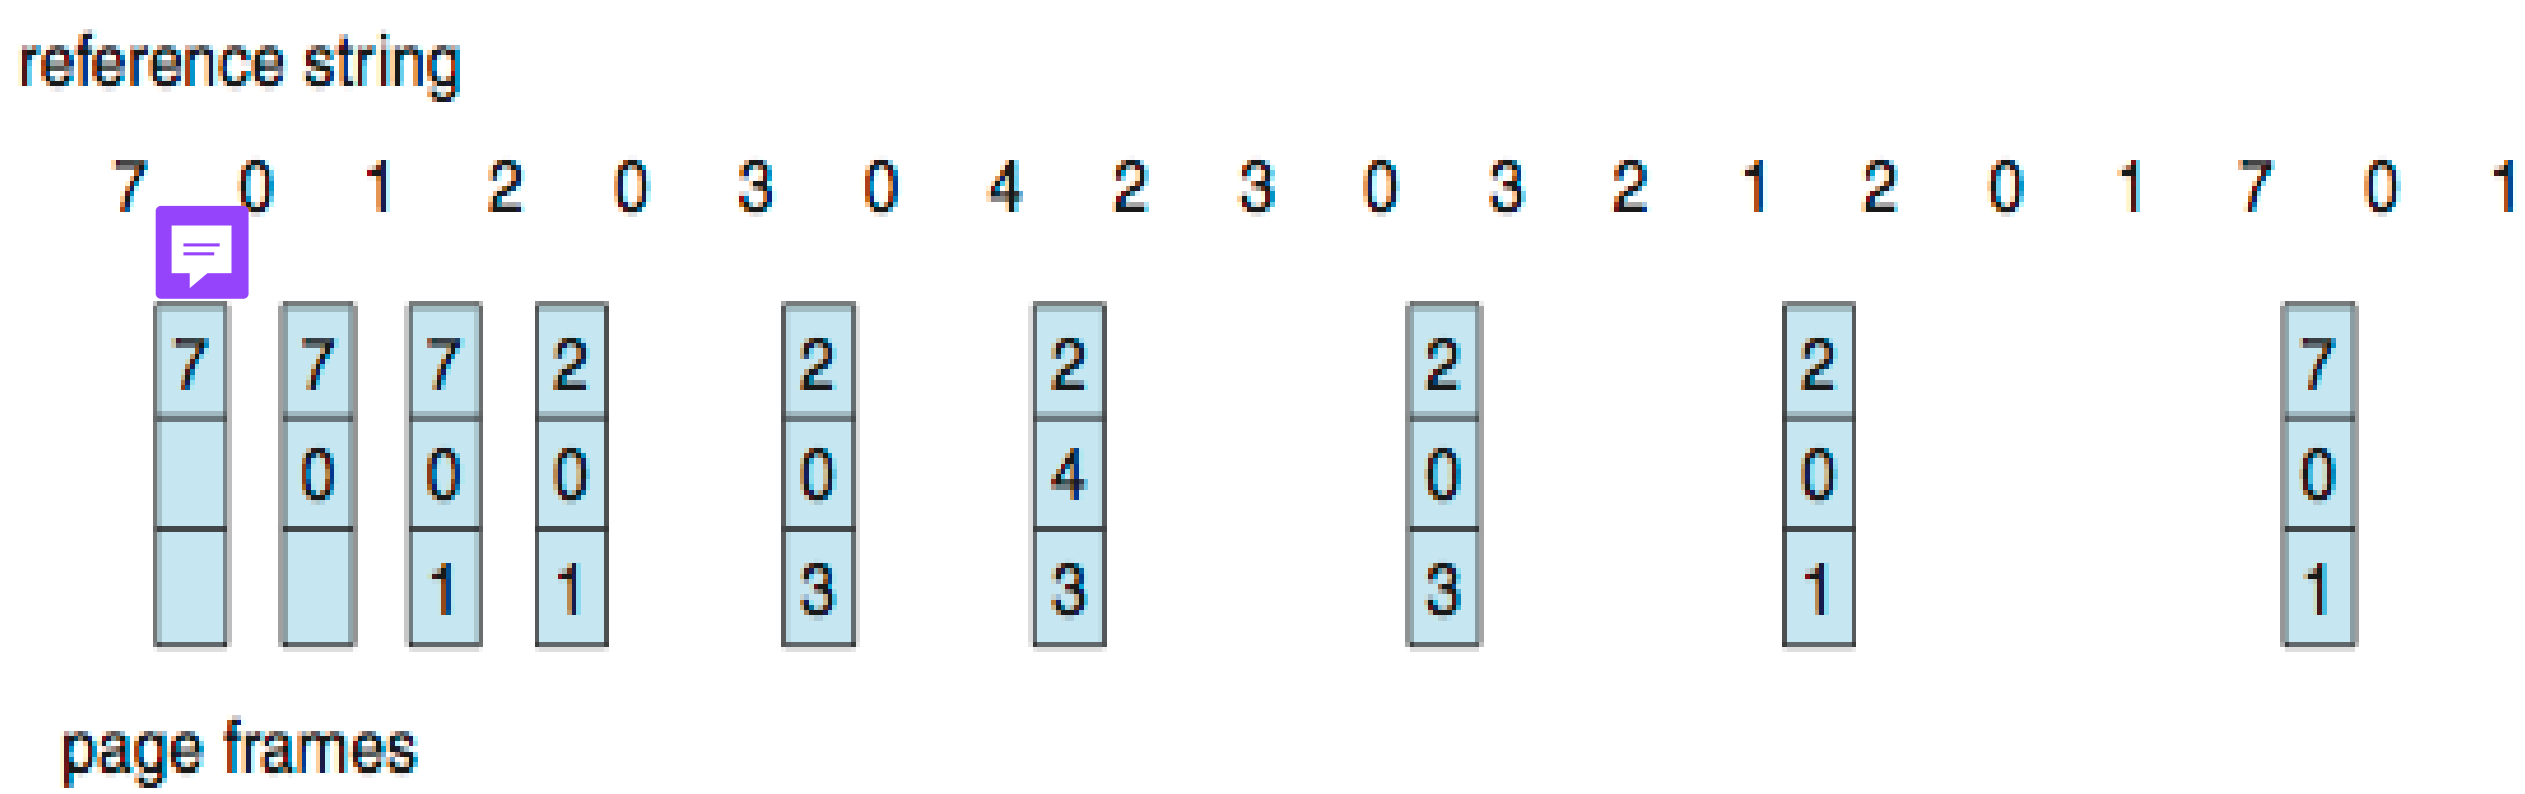

Least Recently Used (LRU) Algorithm

- Use past knowledge rather than future
- Replace page that has not been used in the most amount of time
- Associate time of last use with each page

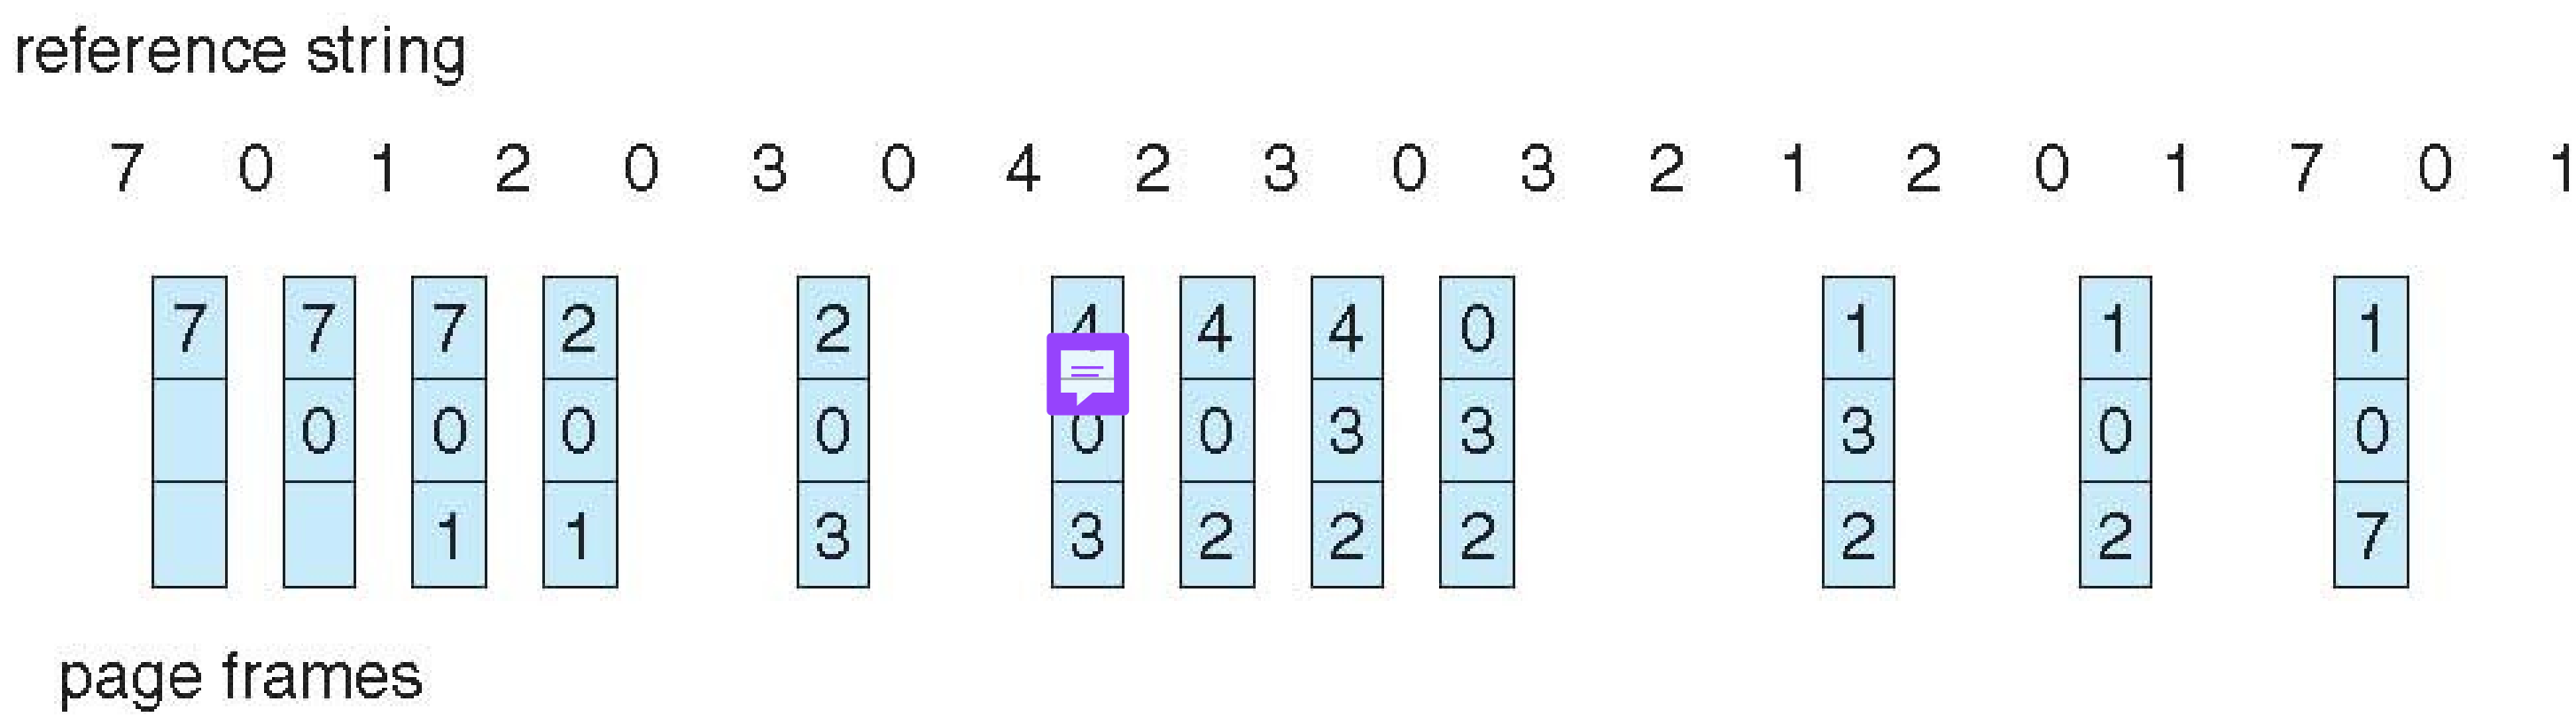

- 12 faults – better than FIFO but worse than OPT
- Generally good algorithm and frequently used
- But how to implement?

LRU Algorithm (Cont.)

- Counter implementation
  - Every page entry has a counter; every time page is referenced through this entry, copy the clock into the counter
  - When a page needs to be changed, look at the counters to find smallest value
    - Search through table needed
- Stack implementation
  - Keep a stack of page numbers in a double link form:
  - Page referenced:
    - move it to the top
    - requires 6 pointers to be changed (for 6 virtual page)
  - But each update more expensive
  - No search for replacement
- LRU and OPT are cases of **stack algorithms** that don't have Belady's Anomaly

Use Of A Stack to Record Most Recent Page References

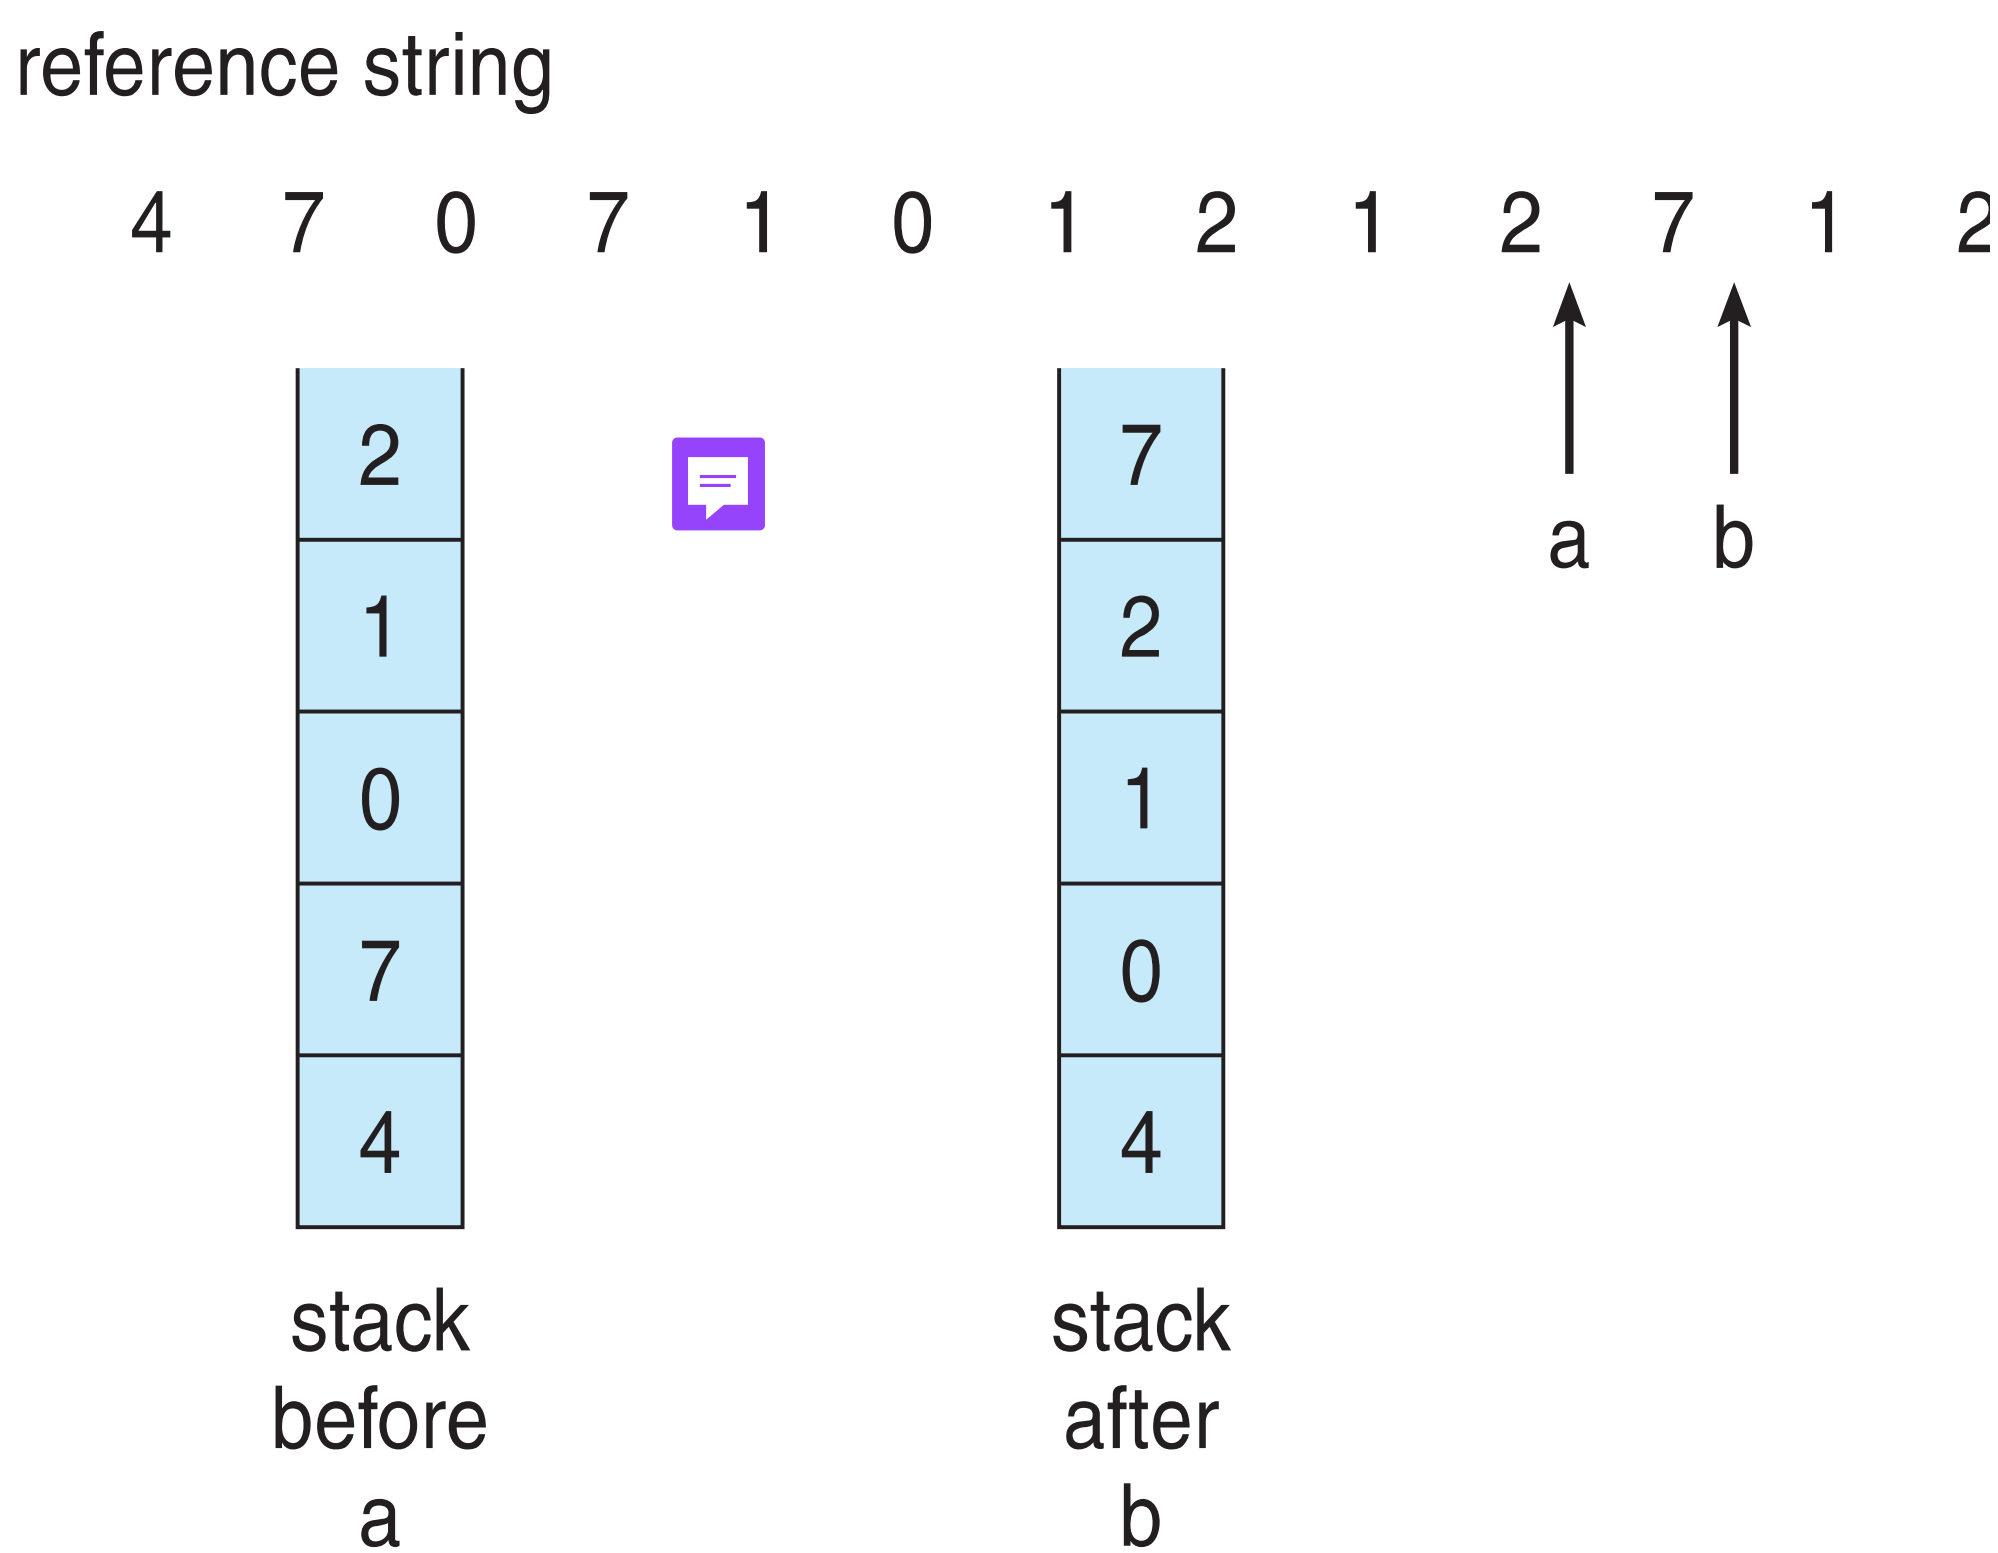

LRU Approximation Algorithms

- LRU needs special hardware and still slow
- **Reference bit**
  - With each page associate a bit, initially = 0
  - When page is referenced bit set to 1
  - Replace any with reference bit = 0 (if one exists)
    - We do not know the order, however
- **Second-chance algorithm**
  - Generally FIFO, plus hardware-provided reference bit
  - **Clock** replacement
  - If page to be replaced has
    - Reference bit = 0 -> replace it
    - reference bit = 1 then:
      - set reference bit 0, leave page in memory
      - replace next page, subject to same rules

Second-Chance (clock) Page-Replacement Algorithm

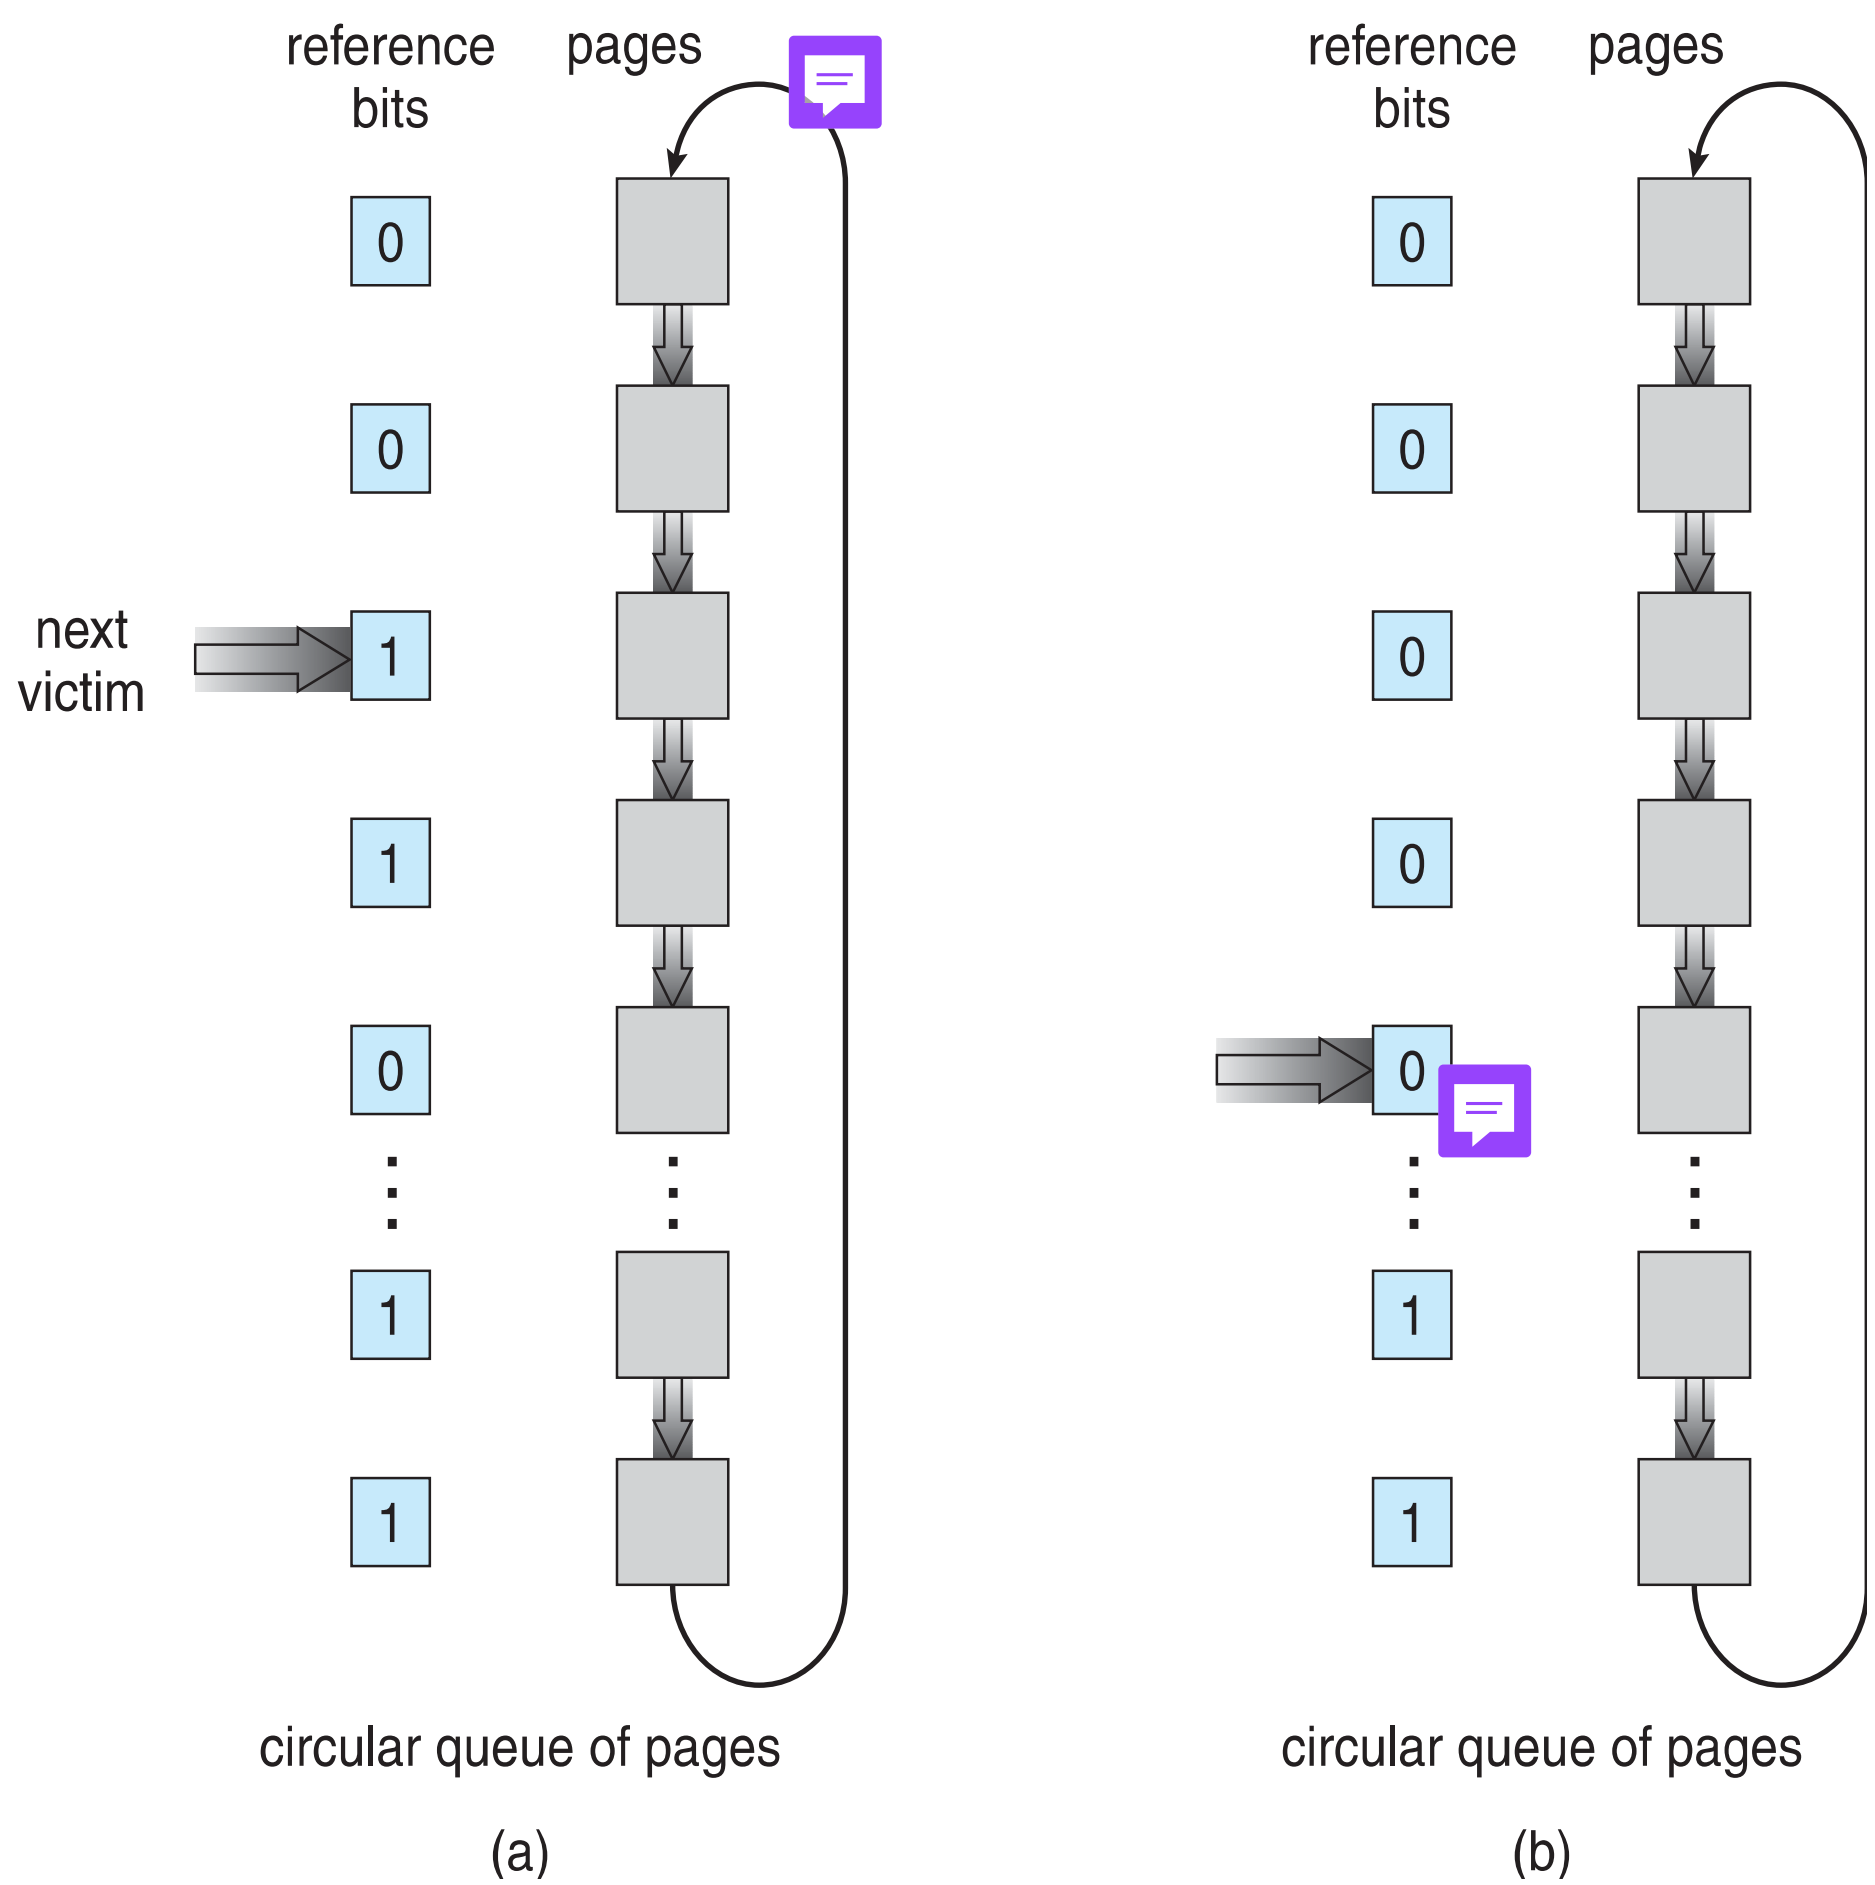

Allocation of Frames

- Each process needs ***minimum*** number of frames
  - The minimum number of frames is defined by the computer architecture
  - we must have enough frames to hold all the different pages that any single instruction can reference.
- ***Maximum*** of course is total frames in the system
- Two major allocation schemes
  - fixed allocation
  - priority allocation
- Many variations

Fixed Allocation

- Equal allocation – For example, if there are 100 frames (after allocating frames for the OS) and 5 processes, give each process 20 frames
  - Keep some as free frame buffer pool
- Proportional allocation – Allocate according to the size of process
  - Dynamic as degree of multiprogramming, process sizes change
    - $s_i =$ size of process p_i
    - $S = \sum s_i$
    - $m =$ total number of frames
    - $a_i =$ allocation for $p_i = \frac{s_i}{S} \times m$

$m = 64$

$s1 = 10$

$s_2 = 127$

$a_1 = \frac{10}{137} \times 62 \approx 4$

$a_2 = \frac{127}{137} \times 62 \approx 57$

Priority Allocation

- Use a proportional allocation scheme using priorities rather than size
- If process P_i generates a page fault,
  - select for replacement one of its frames (local replacement)
  - select for replacement a frame from a process with lower priority number (global replacement)

Global vs. Local Allocation

- **Global replacement** – process selects a replacement frame from the set of all frames; one process can take a frame from another
  - But then process execution time can vary greatly
  - But greater throughput so more common
- **Local replacement** – each process selects from only its own set of allocated frames
  - More consistent per-process performance
  - But possibly underutilized memory

Reclaiming Pages

- A strategy to implement global page-replacement policy
- All memory requests are satisfied from the free-frame list, rather than waiting for the list to drop to zero before we begin selecting pages for replacement,
- Page replacement is triggered when the list falls below a certain threshold.
- This strategy attempts to ensure there is always sufficient free memory to satisfy new requests.

Reclaiming Pages Example

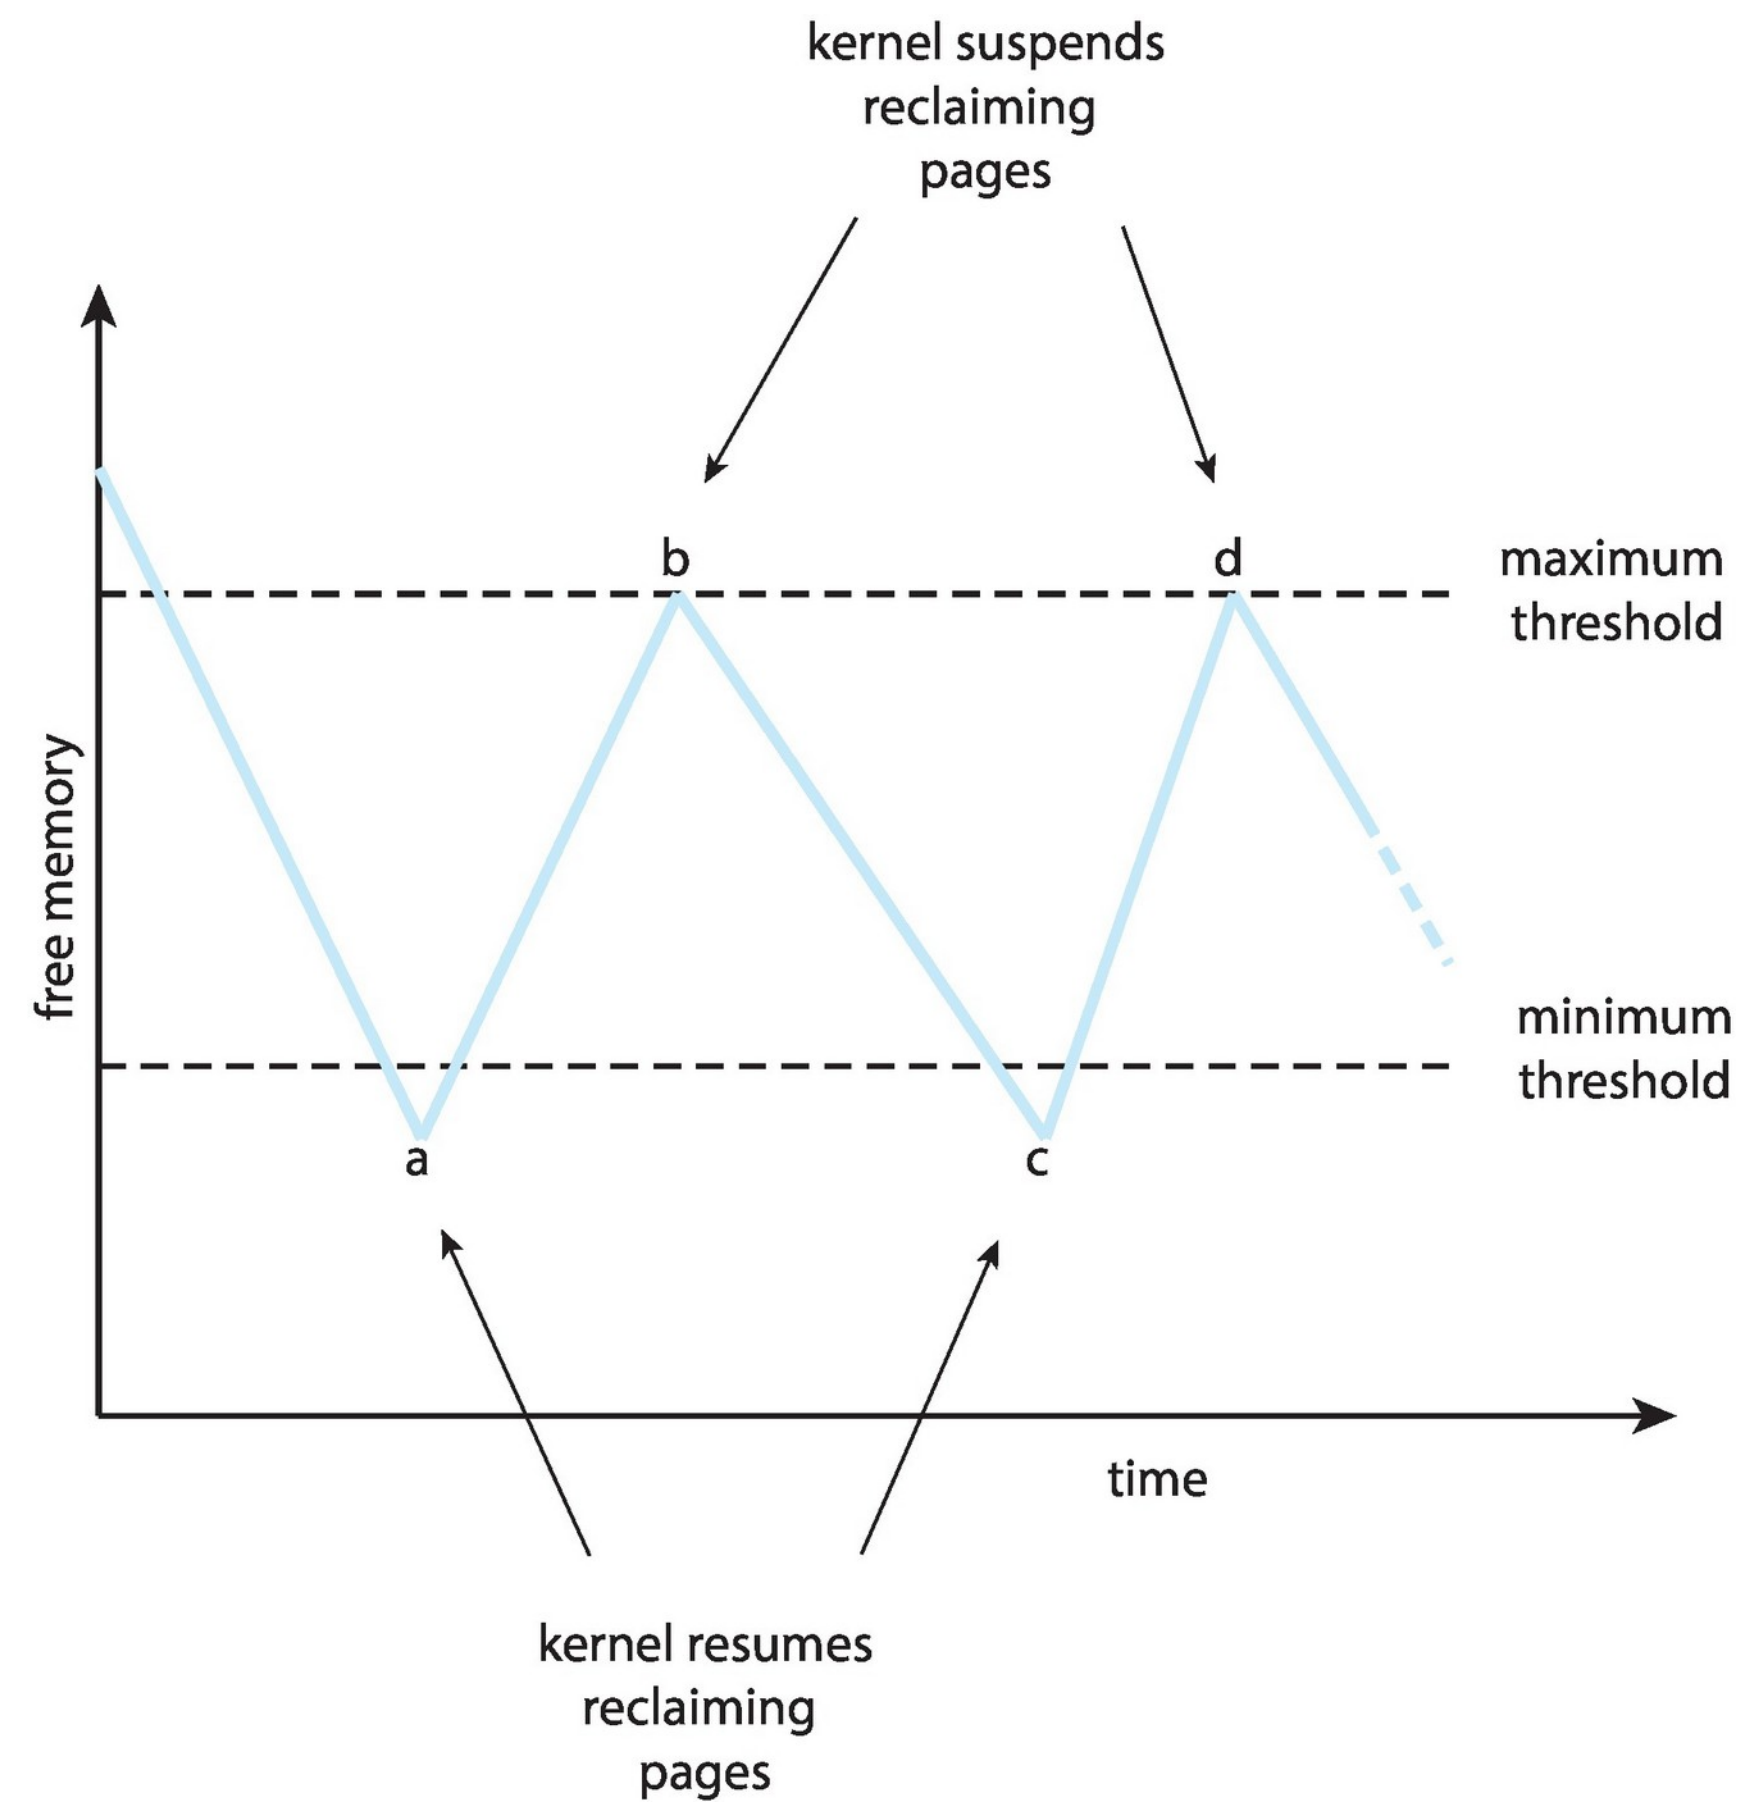

Thrashing

- If a process does not have "enough" pages, the page-fault rate is very high
  - Page fault to get page
  - Replace existing frame
  - But quickly need replaced frame back
  - This leads to:
    - Low CPU utilization
    - Operating system thinking that it needs to increase the degree of multiprogramming
    - Another process added to the system

- **Thrashing** ≡ a process is busy swapping pages in and out

Thrashing (Cont.)

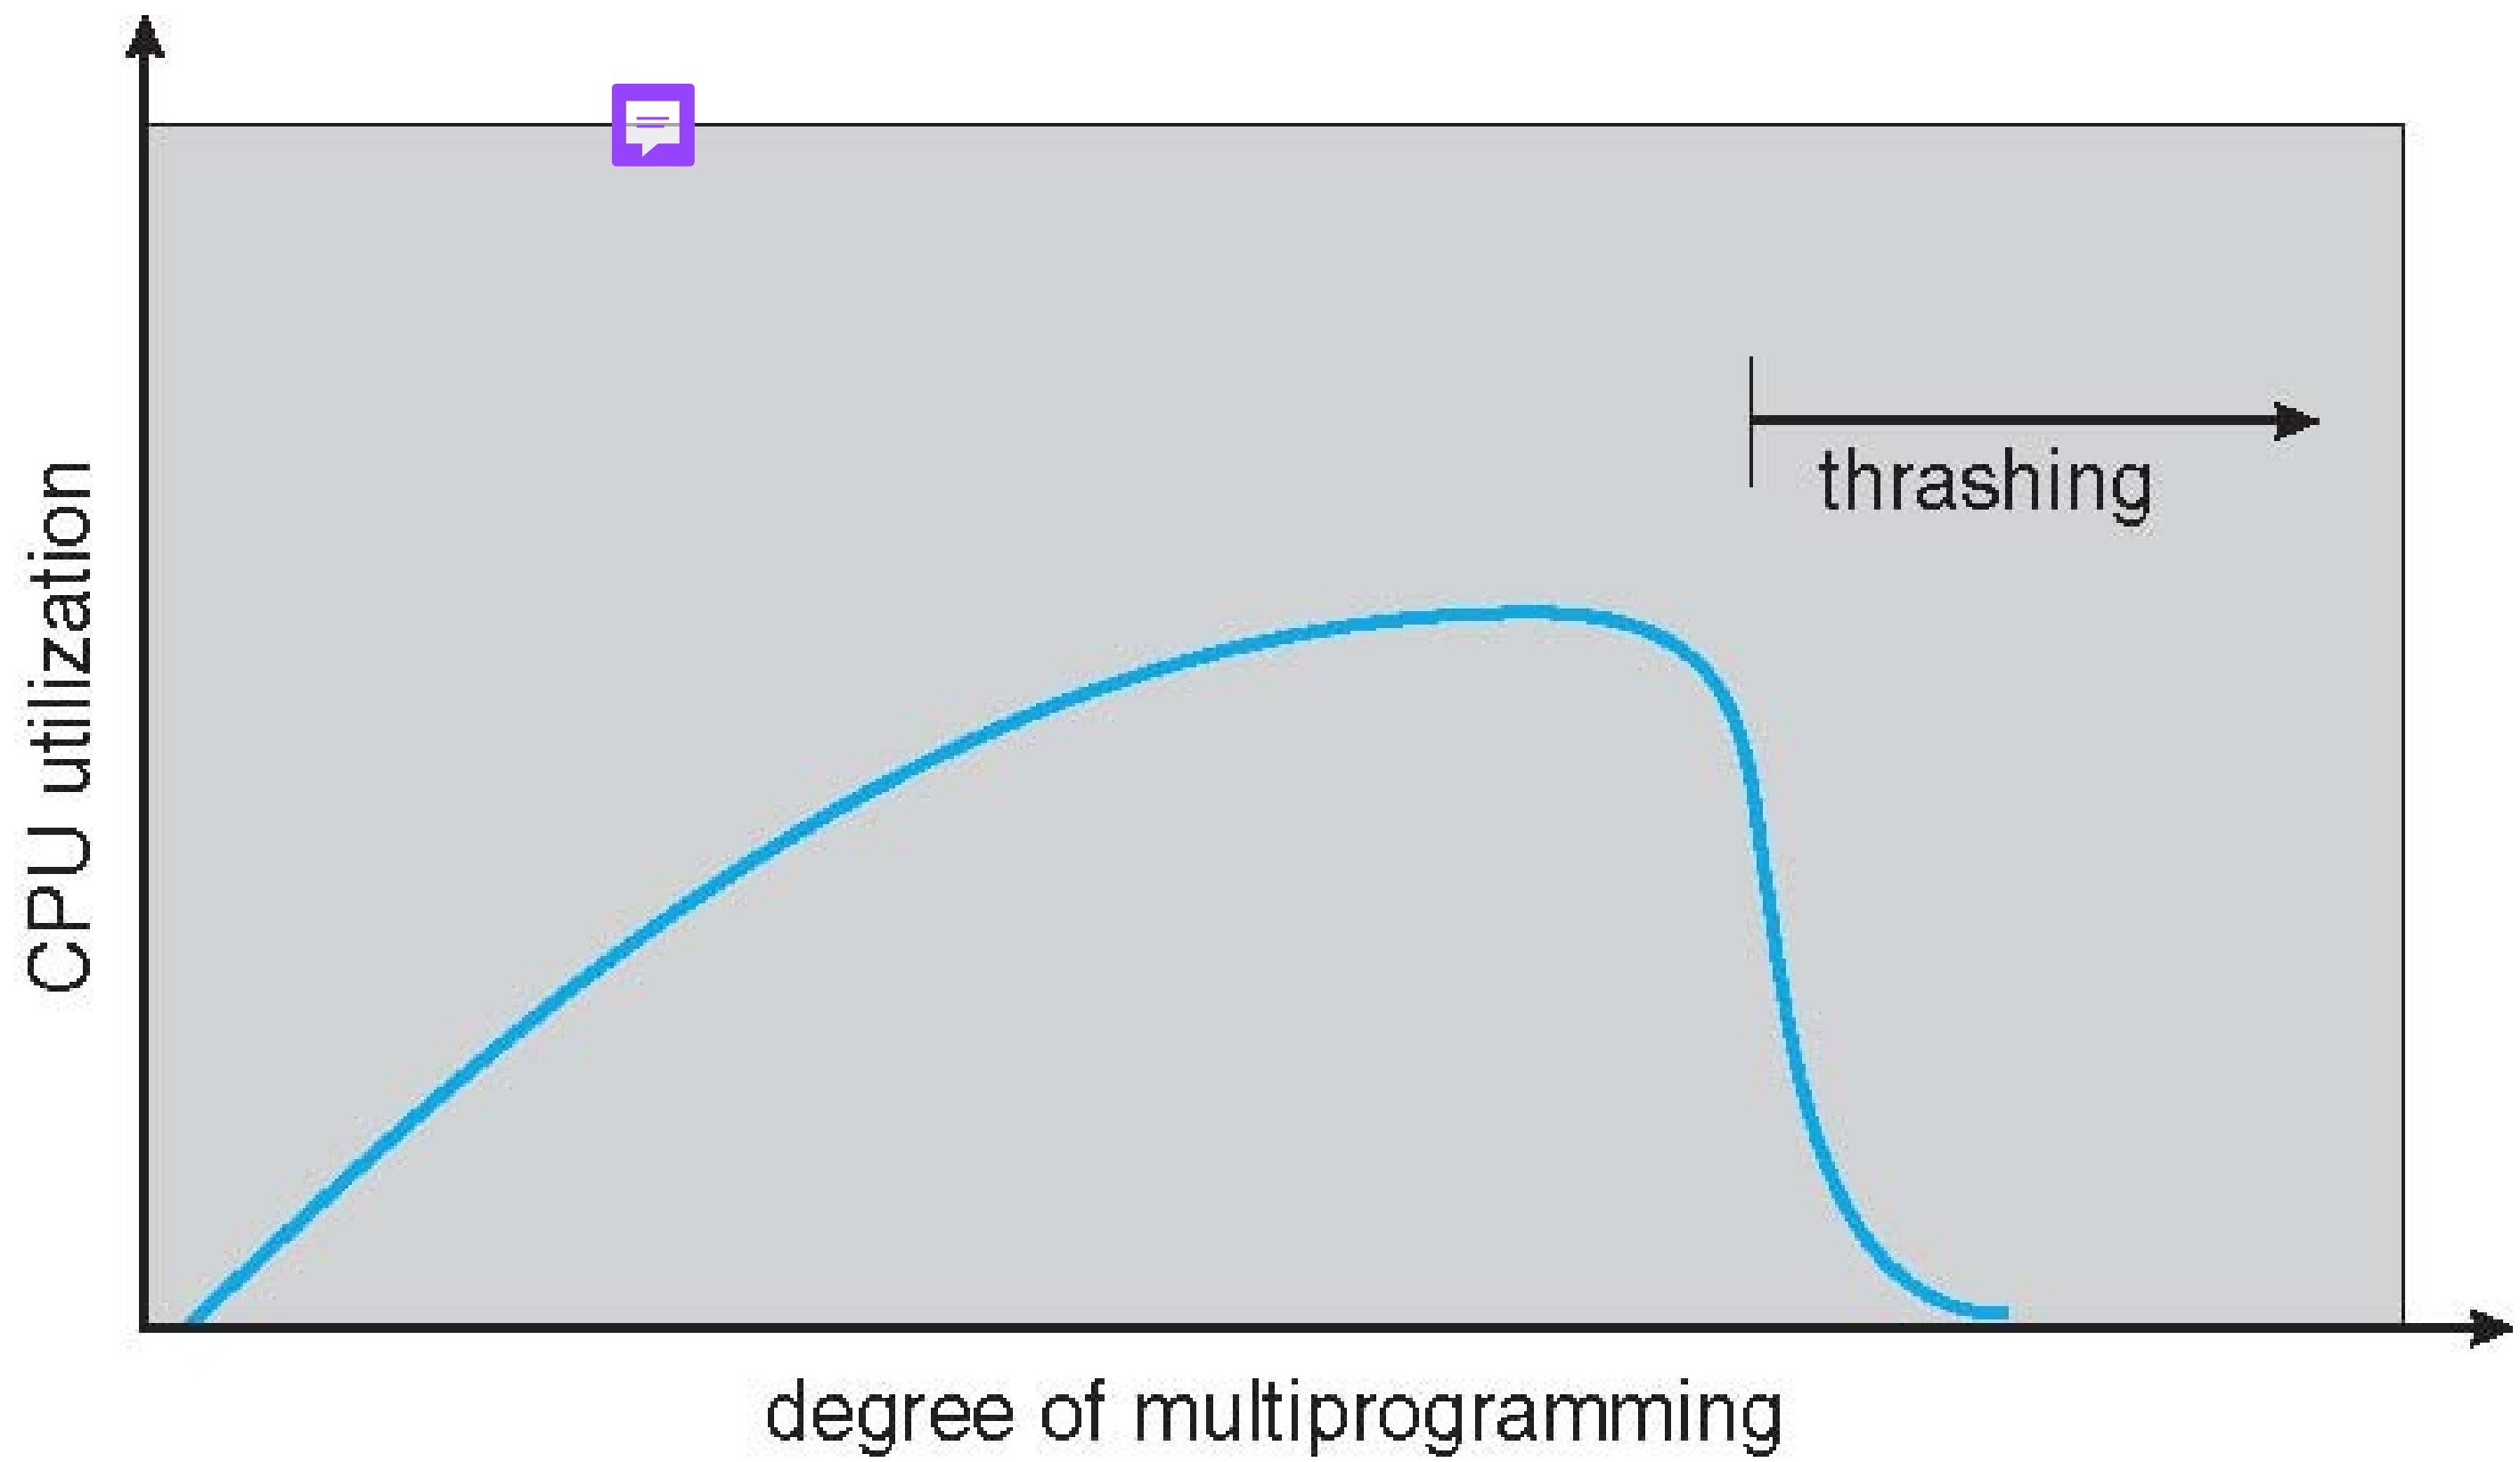

Demand Paging and Thrashing

- Why does demand paging work?
  Locality model
  - Process migrates from one locality to another
  - Localities may overlap

- Why does thrashing occur?
  Σ size of locality > total memory size
  - Limit effects by using local or priority page replacement

Locality In A Memory-Reference Pattern

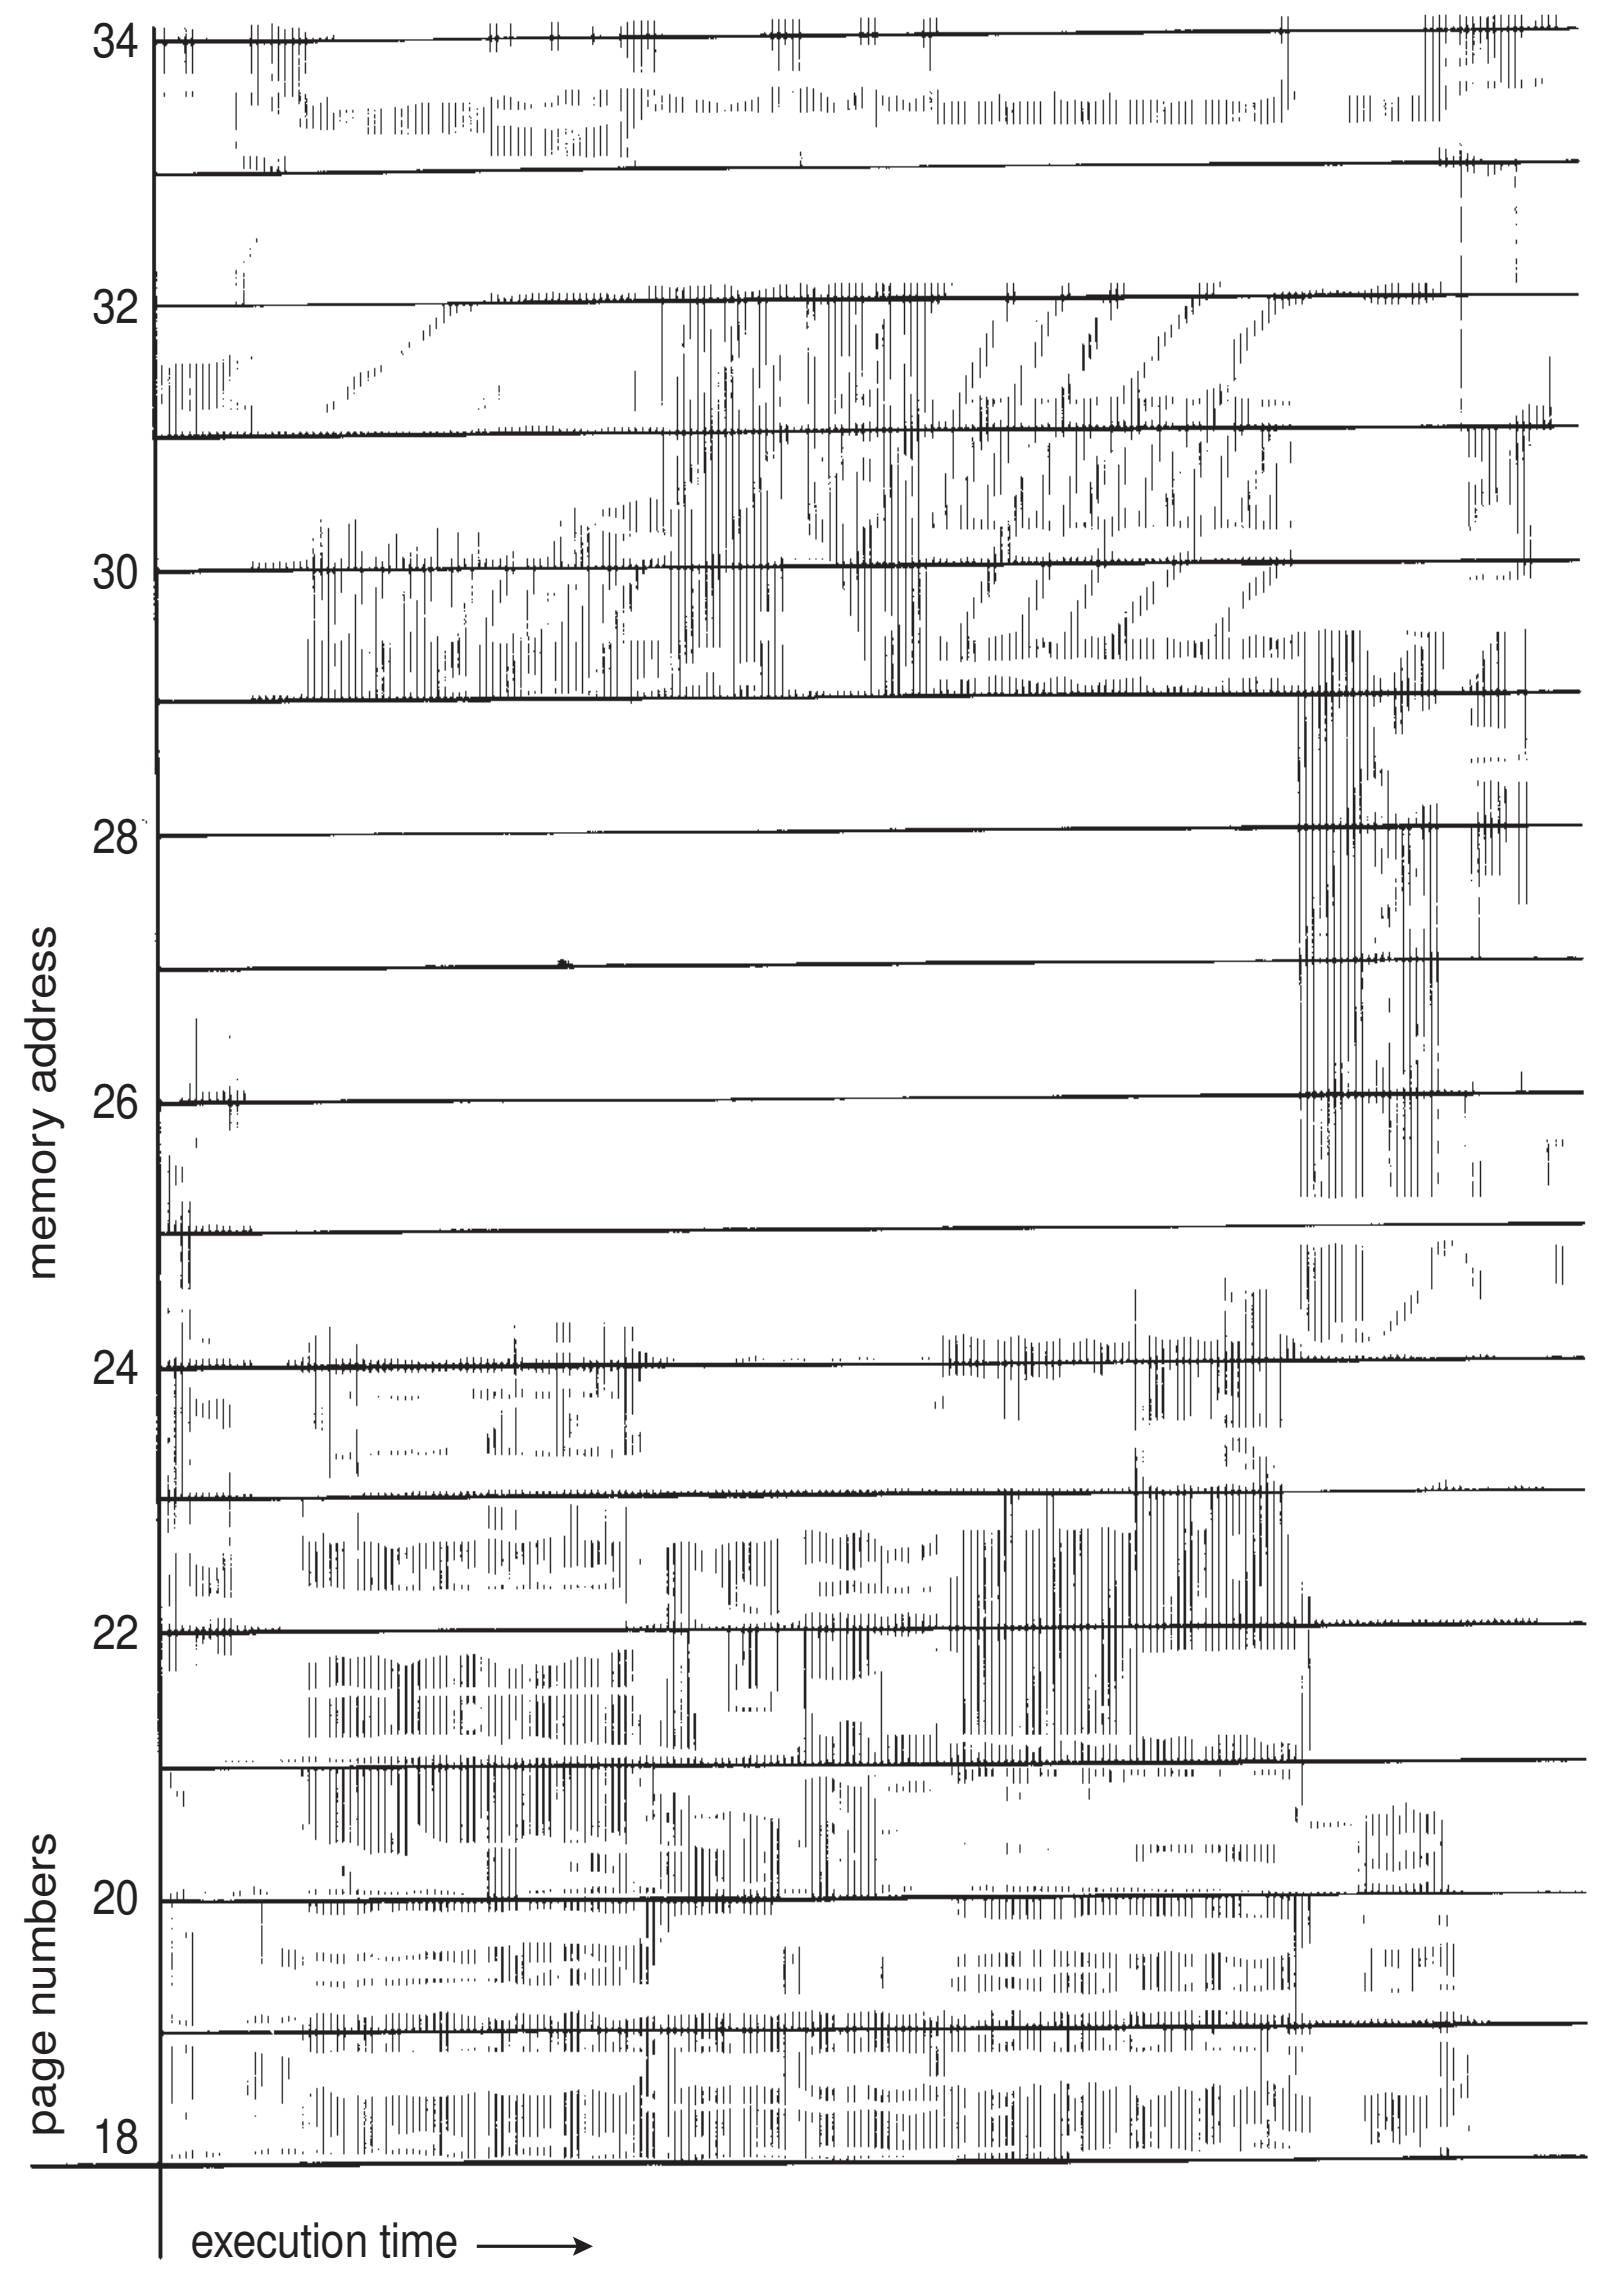

Allocating Kernel Memory

- Treated differently from user memory
- Often allocated from a free-memory pool
  - Kernel requests memory for structures of varying sizes
    - As a result, the kernel must use memory conservatively and attempt to minimize waste due to fragmentation
  - Some kernel memory needs to be contiguous
    - i.e., for device I/O

End of Chapter 10