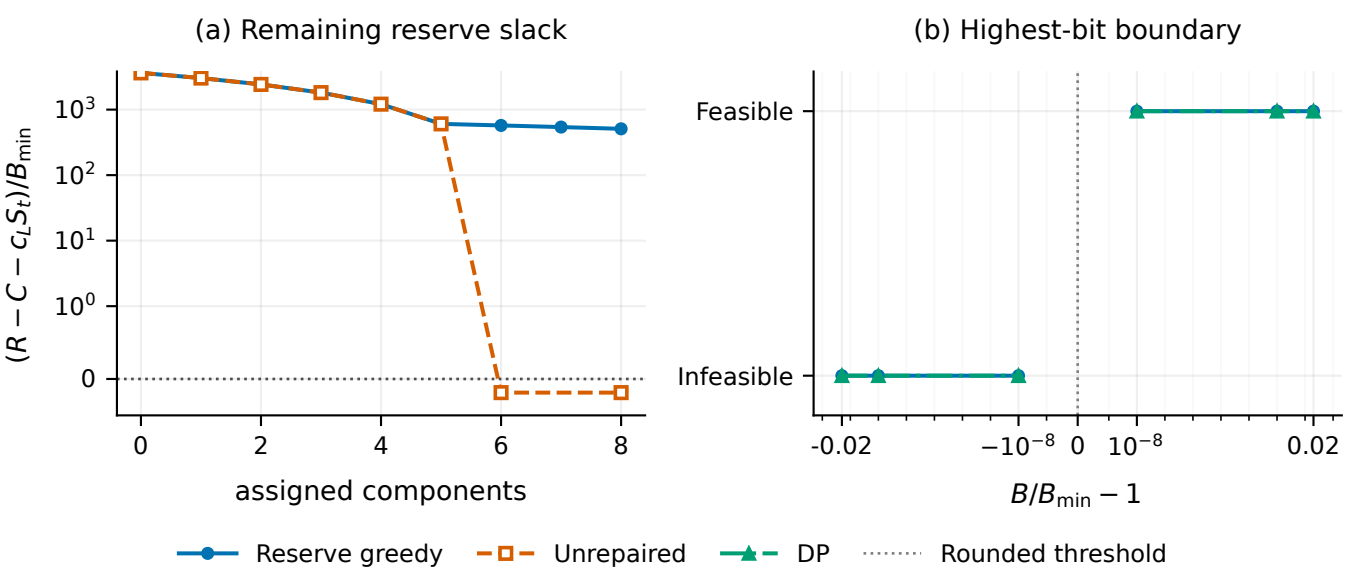
(a) Remaining reserve slack
$(R - C - c_L S_t)/B_{\min}$
10^3
10^2
10^1
10^0
0
0
2
4
6
8
assigned components
(b) Highest-bit boundary
Feasible
Infeasible
-0.02
-10^{-8}
0
10^{-8}
0.02
$B/B_{\min} - 1$
Reserve greedy
Unrepaired
DP
Rounded threshold