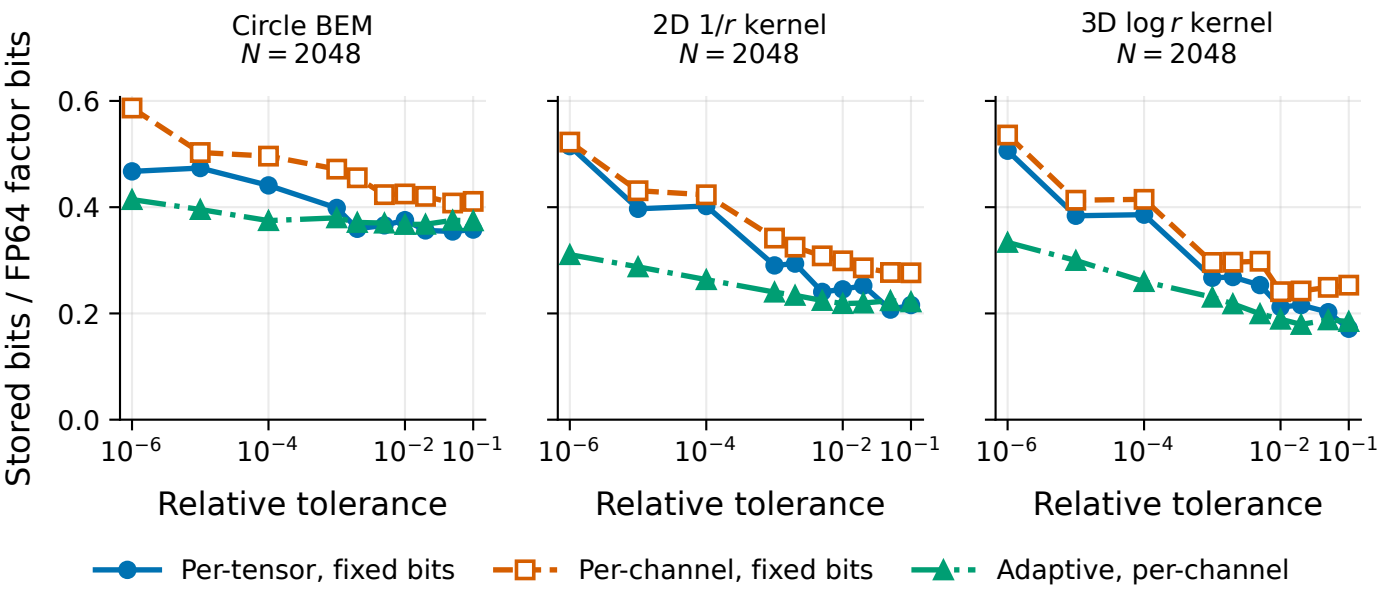
Circle BEM
N = 2048
2D 1/r kernel
N = 2048
3D log r kernel
N = 2048
Stored bits / FP64 factor bits
0.0
0.2
0.4
0.6
10^−6
10^−4
10^−2
10^−1
Relative tolerance
Per-tensor, fixed bits
Per-channel, fixed bits
Adaptive, per-channel