

<HSS-4545*W>

Technical drawing of the HSS-4545*W robot arm, showing dimensions and movement range.

Dimensions:


- Overall width: 390
- Distance from center to cable space start: 163
- Cable space width: 230
- Distance from center to cable space end: 115
- Distance from center to cable space end (inner): 98
- Distance from center to cable space end (outer): 182
- Distance from center to cable space end (inner): 92
- Distance from center to cable space end (outer): 58
- Distance from center to cable space end (inner): 229

Angles:

- 282°
- 304°

Labels:

- ケーブルスペース (Cable Space)
- 動作禁止エリア (No Operation Area)
- 動作範囲 (Operation Range)
- R450
- R151

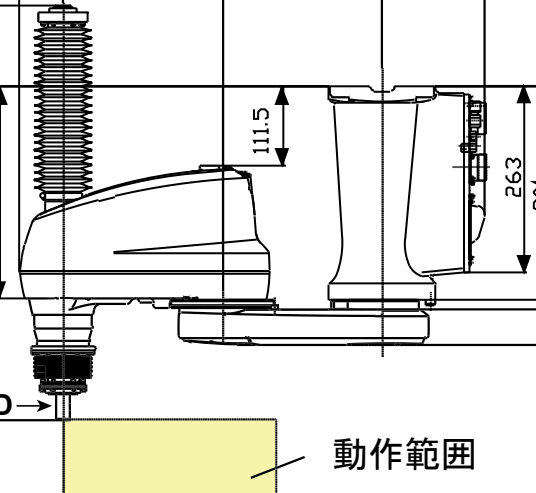


Technical drawing of the 3000 Series 1/2" (Figure 10) showing dimensions in millimeters. The drawing includes a side view and a front view. Key dimensions are labeled as follows:

- Horizontal dimensions (top): 61.5, 225, 225, 144.
- Vertical dimensions (left): L1, L2, 471, 300, 111.5.
- Vertical dimensions (right): 263, 301, 315, 365.
- Other labels: D, S, and a yellow shaded area labeled "動作範囲" (Operating Range).


ベース取付寸法

150
120
4-φ12
150
134±0.05
120
2-φ6H7^{+0.012}₀
43±0.05
117

ツール取付面詳細（矢視 D）

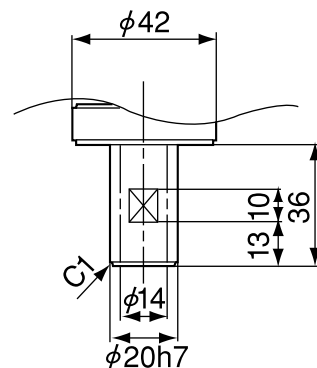

フランジ(オプション)取付図

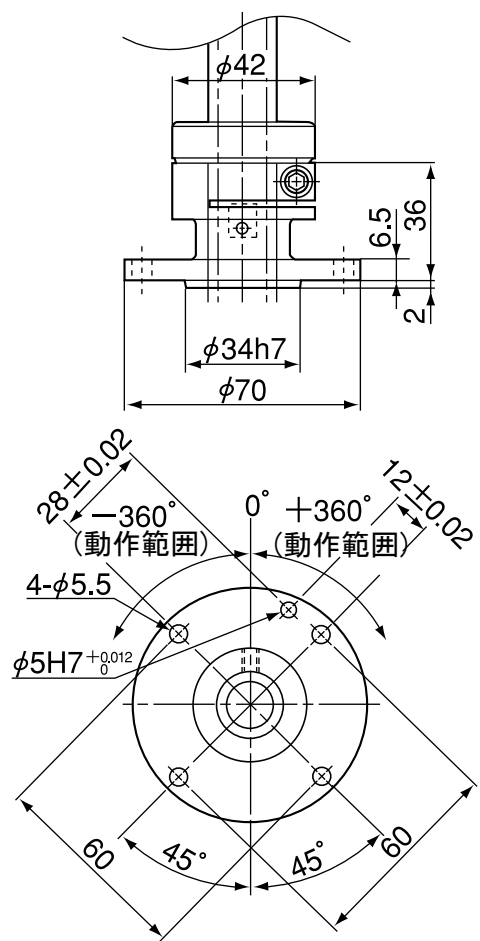

注：Z軸ストローク（S）の違いによる各寸法

型式	S	L1	L2
HSS-45451W	150	64	621
HSS-45452W	200	114	671
HSS-45453W	320	234	791

注：天吊リタイプの場合、Z軸の最上昇端はベース取付面より高い位置まで達するので、周辺装置との干渉に注意してください。