

Case 3: CACTUS + SiRi at the Oslo cyclotron laboratory

Ina Kullmann

November 17, 2016

1 GENERAL OVERVIEW OF THE CACTUS + SiRi DETECTOR SETUP AT OCL

The Oslo Cyclotron Laboratory (OCL) houses the only accelerator in Norway for ionized atoms in basic research¹. Experiments are carried out to study the nuclear structure of isotopes at excitation energies up to the neutron binding energy. This is done by bombarding a thin target foil, typically 0.5 - 4 mg/cm² thick, with light ion beam accelerated by the cyclotron.


An overview of the Oslo Cyclotron Laboratory is given in figure ???. The possible beam types, energy and intensity ranges are indicated in the table to bottom left. We can see the cyclotron vault to the far right with the cyclotron (MC-35 Scanditronix Cyclotron) at the bottom right. The beam of the accelerated particles travels first from the cyclotron along the beam line through switching and analyzing magnets before hitting the target chamber (CACTUS/SiRi) to the far left in figure ??. The ΔE -E-detector array SiRi is placed inside a vacuum chamber and the NaI-detectors (CACTUS) are placed at a small distance, both surrounding the target chamber.

The analysis method (mostly) applied to the data, the Oslo method, requires particle-gamma coincidences. The coincidences can be studied by using the CACTUS/SiRi detectors. In figure ?? we see an illustration of a particle from the beam hitting a target nucleus. After the reaction a gamma-ray and a particle is emitted in addition leaving the resulting nucleus excited and/or chemically changed. We see that the gamma is measured by the CACTUS detector and the emitted particle by the SiRi detector. The angle between the incident trajectory and the trajectory of the emitted particle is given as θ .

¹<http://www.mn.uio.no/fysikk/english/research/about/infrastructure/OCL/index.html>



Figure 1: An overview of the Oslo Cyclotron Laboratory with the experimental hall to the right with the cyclotron at the bottom right. The beam line are indicated with a blue line and the target chamber is at the top left (CACTUS/SiRi). The possible beam types, energy and intensity ranges are indicated in the table to bottom left.

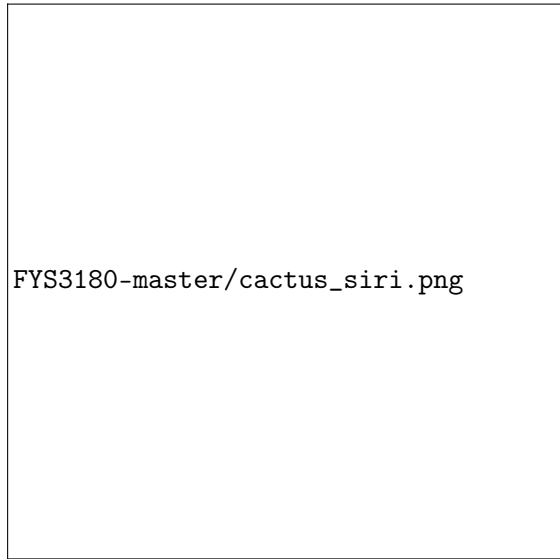

FYS3180-master/cactus_siri.png

Figure 2: A incident particle hitting a target nucleus. The resulting emitted *gamma*-ray is detected by the CACTUS detectors and the emitted particle is detected by the SiRi detector. The angle between the incident trajectory and the trajectory of the emitted particle is given as θ . The two parts of the SiRi detector, 'dE' and 'E' is indicated in the figure.

THE CACTUS DETECTORS

The CACTUS detectors measures the energies of the γ -rays. The detector setup consists of 28 NaI scintillation detectors spherically distributed around the target chamber, pointing out like a Cactus. The detectors are placed at 25 cm distance from the target. The scintillator detectors are collimated with lead collimators.


Each of the NaI scintillation detectors measure the energy of the γ -radiation by using the excitation effect of the radiation on a scintillator material (NaI). When the scintillator is excited by radiation it produces a signal that is then converted into an electrical signal that the electronics of the detector processes².

THE SiRi DETECTORS

The SiRi-array measures the energy of the resulting emitted particle and consists of 8 Silicon detectors on a ring. Each detector is divided into 8 strips which also makes it possible to measure the angle of the particle. The Si detectors uses the properties of a semiconductor, doped Silicon, to measure the path and energy of the charged particles by detecting the small ionization currents that occur when the charged particles move through the material³. In figure ?? we see the Silicon Ring (SiRi) to the left and a illustration of one of the detectors on

²https://en.wikipedia.org/wiki/Scintillation_counter

³https://en.wikipedia.org/wiki/Semiconductor_detector

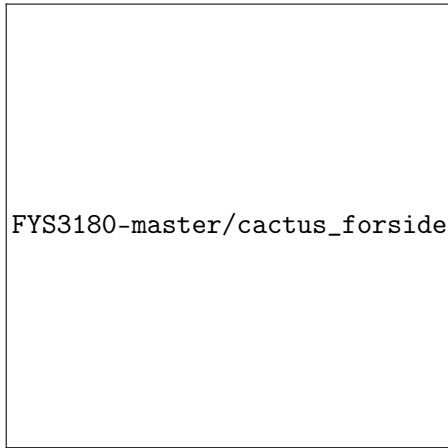

FYS3180-master/cactus_forside.jpg

Figure 3: The CACTUS detectors measures the energies of the γ -rays emitted in a reaction.

the right with the individual strips marked.

The SiRi detector stops the emitted particle, so it loses all its energy as it moves through the material. The detector is divided into two parts, one called 'dE' and the other simply 'E'. The first part 'dE' is 130 micrometers thick and this is where the particle loses some ΔE of its energy. In the other part 'E' the particle loses the remaining energy and stops. In addition, an Aluminium foil of 2.8 mg/cm^2 thickness is placed before the dE detector. The 'dE' and 'E' positions are indicated in figure ??.

HANDLING OF SIGNALS AND EVENTS



Figure 4: The SiRi detector used to measure the energy of a particle from a particle-gamma coincidence. **Left:** A picture of the Silicon Ring (SiRi). **Right:** A drawing of one of the 8 detectors on the ring with the individual strips marked.