![Vaddio logo]

EasyIP Decoder

Audio and Video Decoder

ORDERING INFORMATION
999-60210-000 - Worldwide

OVERVIEW

The EasyIP Decoder is part of the EasyIP Ecosystem, an AV-over-IP solution for videoconferencing. The EasyIP Decoder controls and switches cameras, and provides a USB 3.0 stream of video and audio to the conference room's connected PC or BYOD to use with web-based conferencing systems.

FEATURES
- Supports up to four EasyIP cameras and two Vaddio EasyMIC microphones (TableMIC or CeilingMIC)
- Able to discover and pair with EasyIP Cameras and sources
- Video is transported via EasyIP technology over the network to the decoder
- Allows seamless control of cameras using remote UVC controls
- Provides USB 3.0 output up to 1080p/60 streams
- PoE+ powered

WHAT'S INCLUDED
- EasyIP Decoder
- 3 ft (0.91 m) Cat-5 cable
- 6 ft (1.8 m) USB 3.0 cable
- 1 qty phoenix-style connector
- Single 1/2 Rack Mounting Kit
- Quick-Start Guide

CONNECTOR PANEL
- **Network/PoE+** – RJ-45 connector. Connect to a powered port on the PoE+ switch.
- **USB 3.0** – USB Type B connector. Connect to a computer for use with soft conferencing applications. Provides uncompressed USB 3.0 stream.
- **EasyMic** – RJ-45 connectors. Connect to a TableMIC or other microphone with EasyMic connectivity.
- **Audio output** – Line level differential audio and 12 VDC power output to the optional amplified speaker or other audio infrastructure.
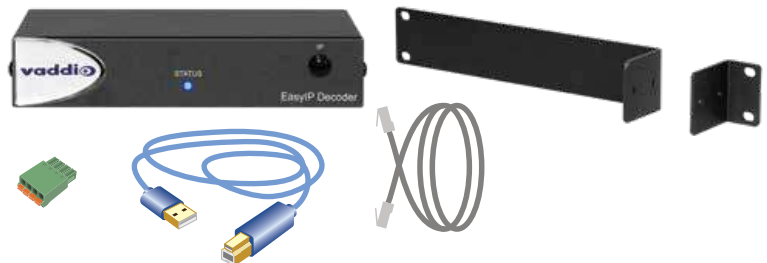
EasyIP Decoder

TECHNICAL SPECIFICATIONS

USB Streaming, Audio, and Control

USB Stream	Video and Audio Up to 1080p/60 Resolution (Full HD)	Input Power	PoE+
USB Audio (record, playback)	2 Channel (UAC) 16-bit resolution 48 KHz sample rate	**EasyMic Inputs (2 channels available)**	RJ-45 12V, bidirectional balanced
Audio Line Out	4-pin Phoenix type terminal block Impedance: 50 ohms Frequency response 20Hz - 20KHz THD + noise < 0.02% Maximum output level +12 dBu differential audio		
Control	Web interface, Telnet		

Physical and Environmental

Height	1.72 in. (4.4 cm)	Operating temperature	0°C to +40°C (32°F to 104°F)
Width	8.38 in. (21.3 cm)	**Operating humidity (relative)**	20% to 80% non-condensing
Depth	6.0 in. (15.2 cm)	**Storage temperature**	-5°C to +60° C (23°F to 140°F)
Weight	2.65 lb.(1.26 kg)	**Storage humidity (relative)**	20% to 80% non-condensing

Specifications are subject to change without notice.

BASIC CONNECTIONS

EasyIP 10 cameras

vaddio®

THE ART OF EASY | legrandav.com

USA	P 800.572.2011	E av.vaddio.support@legrand.com
EMEA	P +31.495.580.840	E av.emea.sales@legrand.com
APAC	P +852.2145.4099	E av.asia.sales@legrand.com

legrand® | AV

COMMERCIAL BRANDS

Chief | Da-Lite | Middle Atlantic | Projecta | Vaddio