


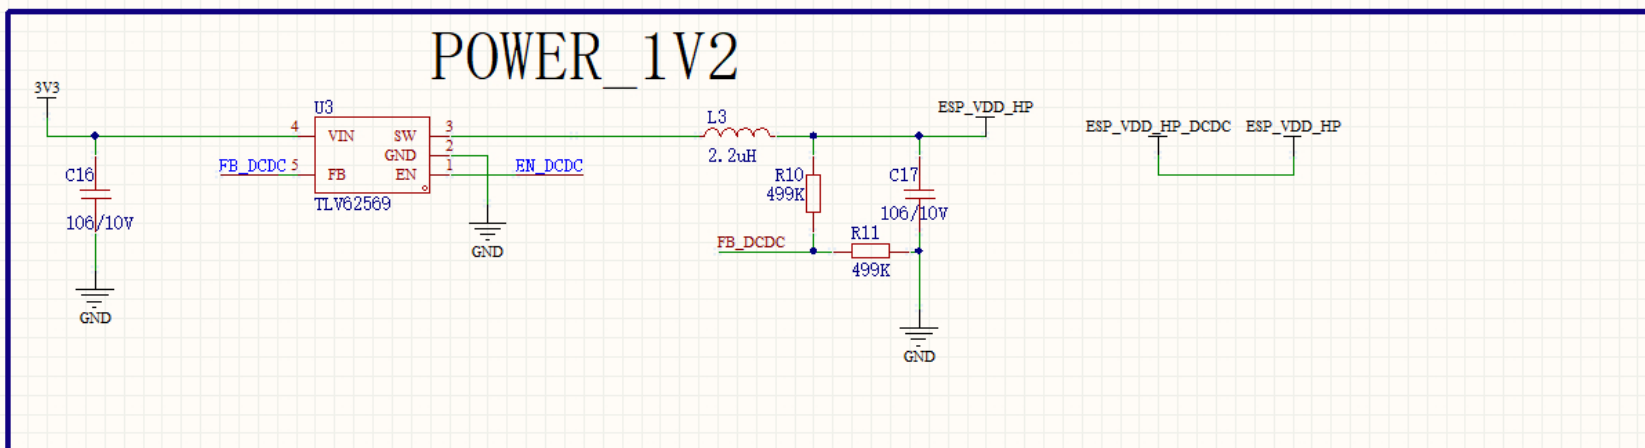
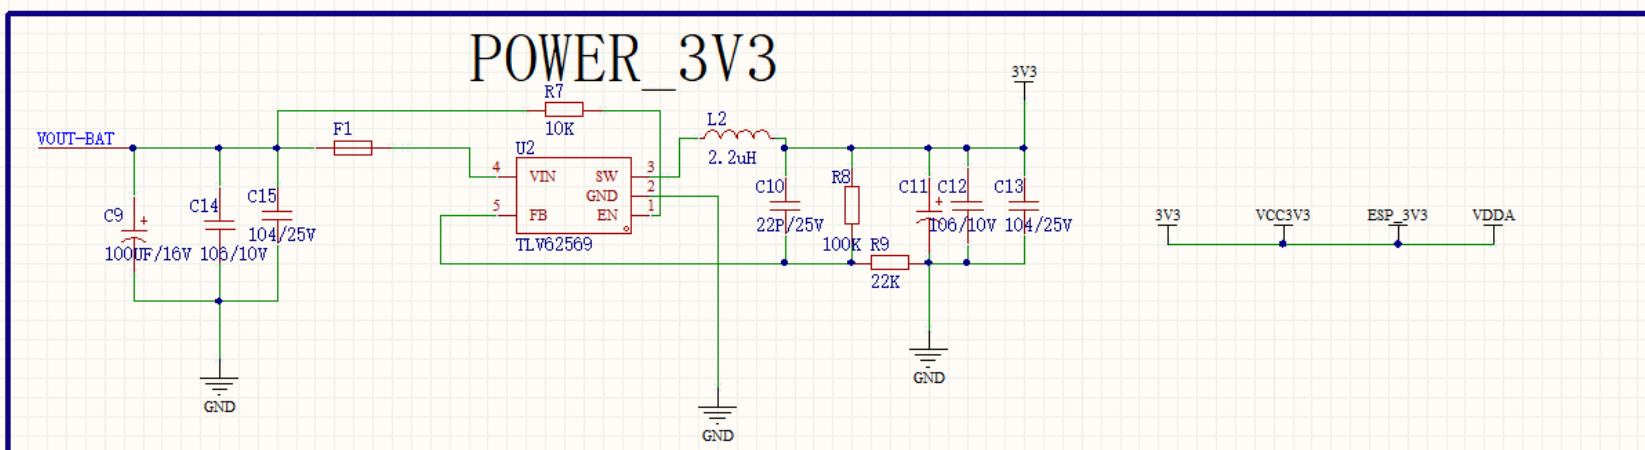


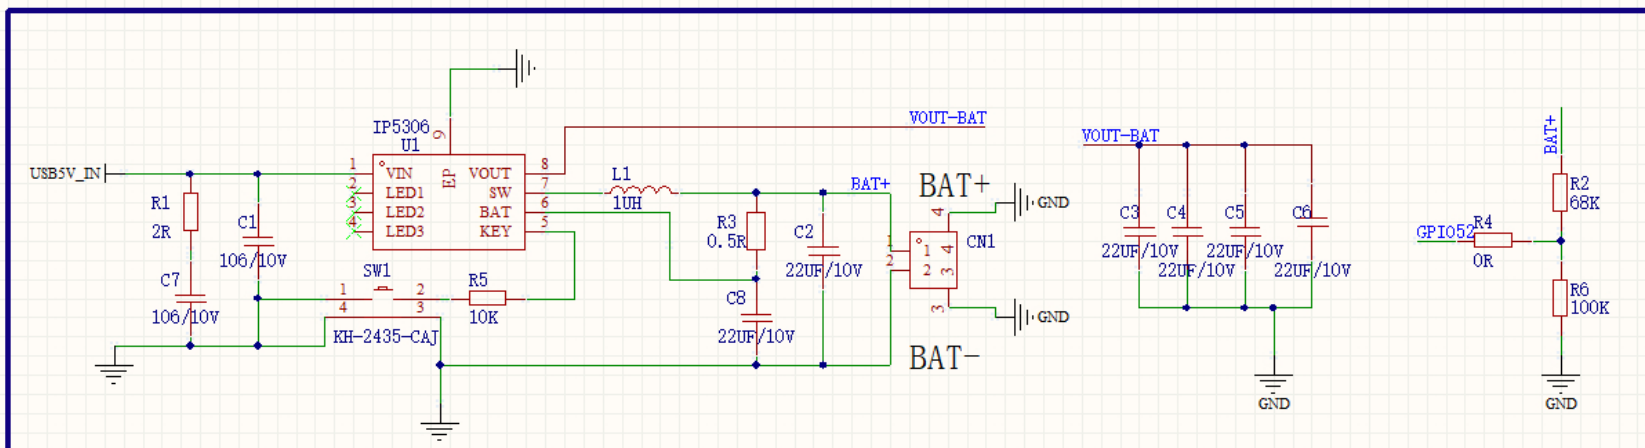

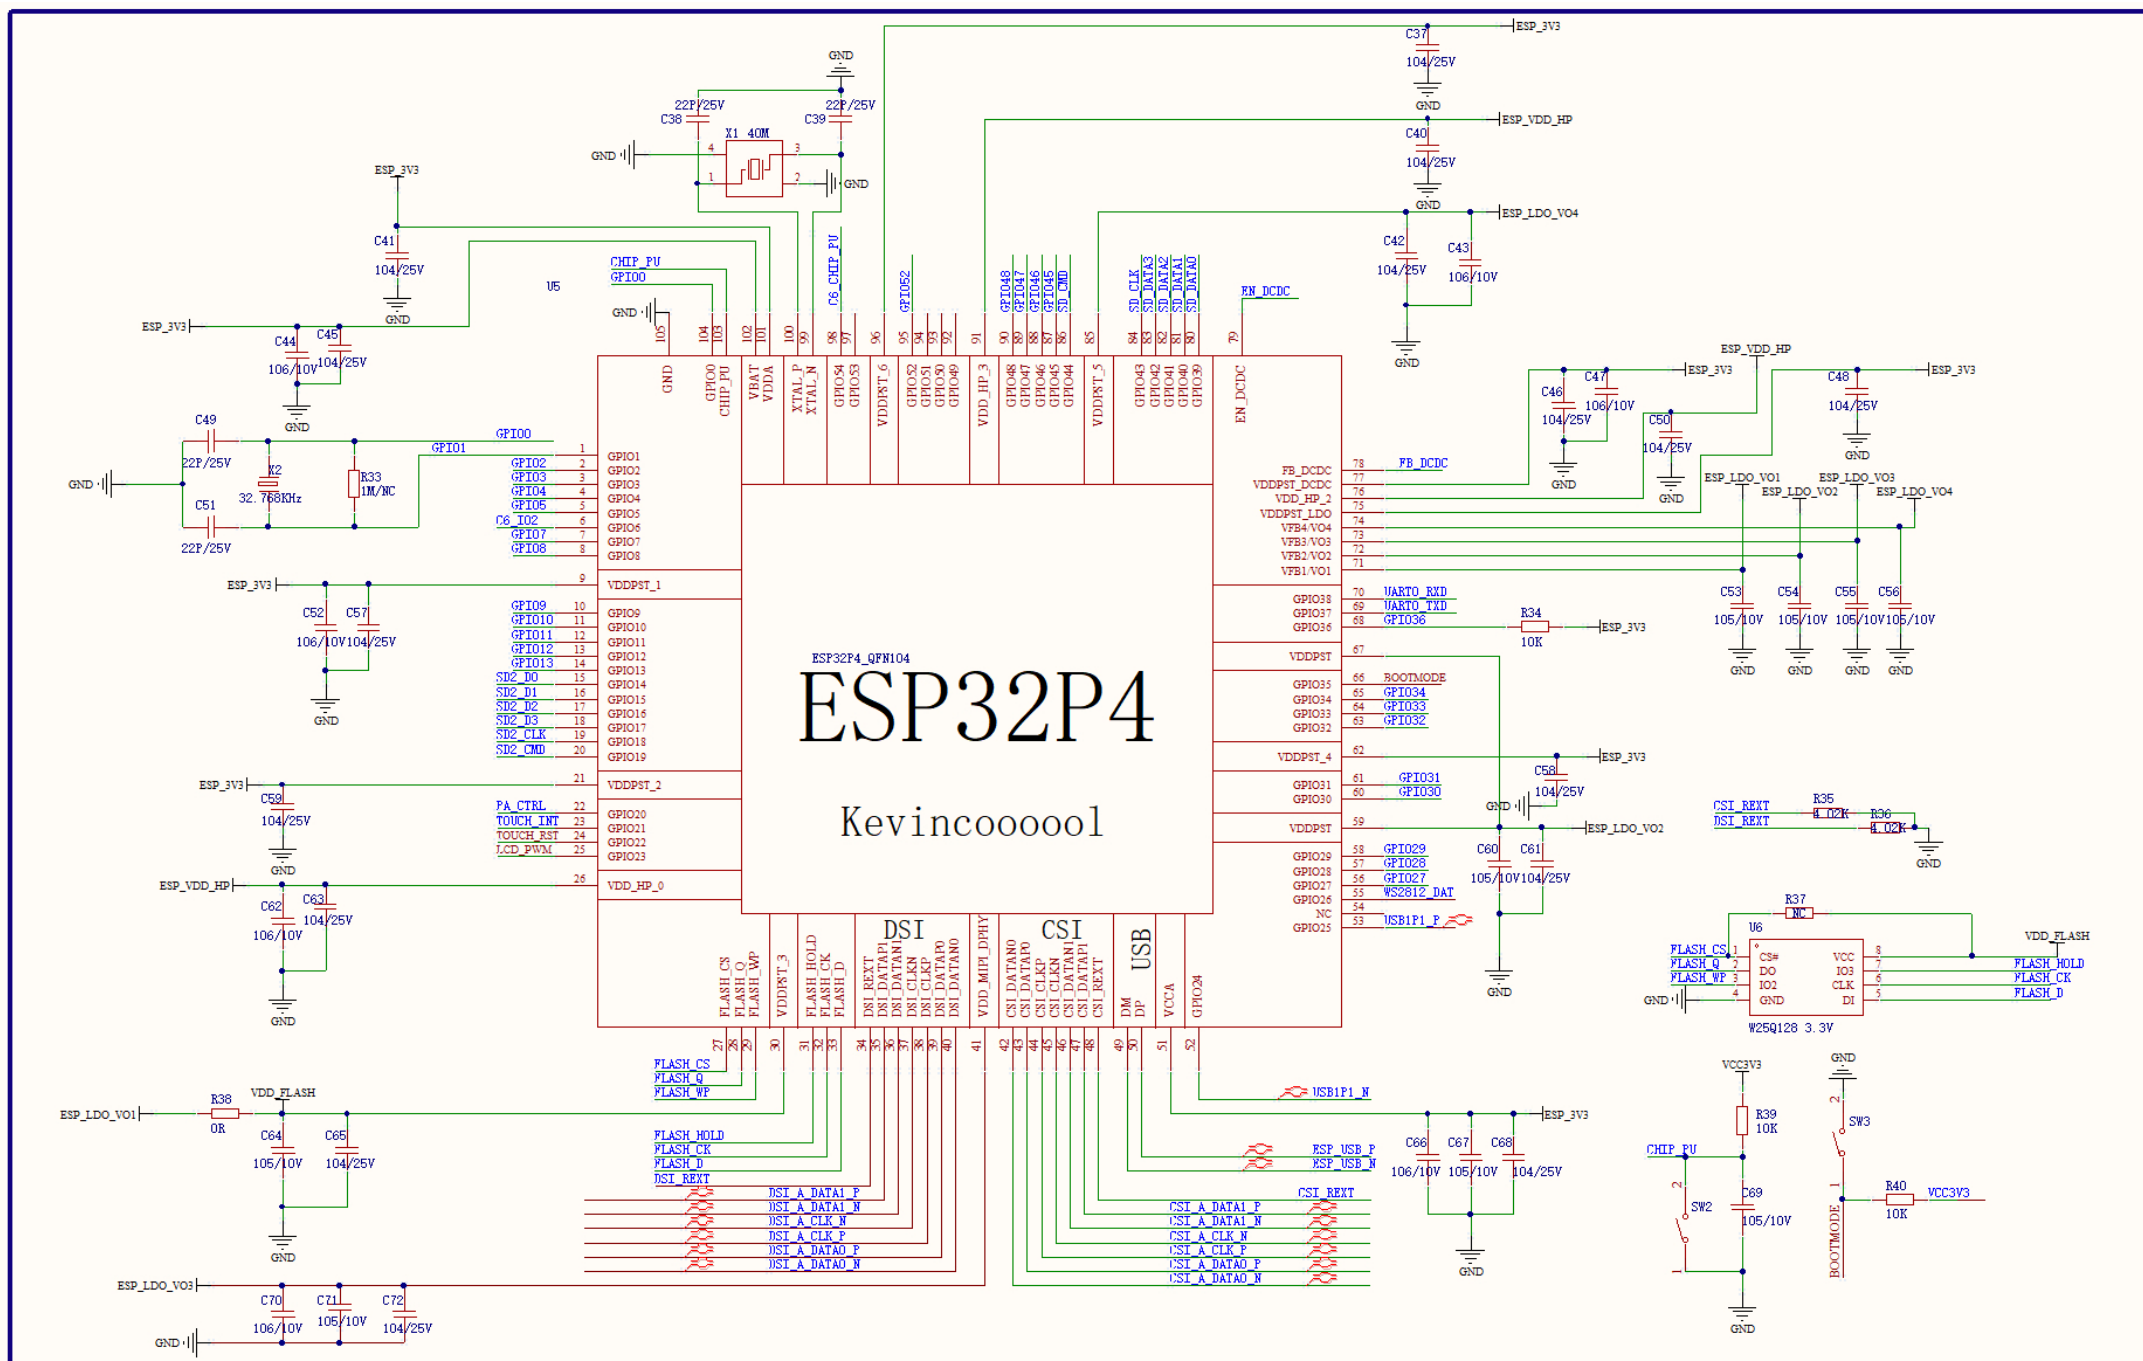

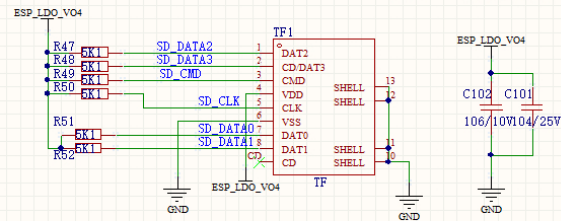

The diagram shows a component labeled LED1 with four pins. Pin 3 is labeled VDD and is connected to a green wire. Pin 4 is labeled DO and has a red 'X' over it. Pin 2 is labeled DI and is connected to a blue wire labeled WS2812_DAT. Pin 1 is labeled GND and is connected to a ground symbol.

[illegible]

Pin connection diagram for FPC2:


- Pin 1: TOUCH_RST
- Pin 2: TOUCH_INT
- Pin 3: RTC_CLK/SCL1
- Pin 4: RTC_DAT/SDA1
- Pin 5: ESP_3V3
- Pin 6: ESP_3V3

Components on the right:


- R53 (5K1) connected to RTC_CLK/SCL1 and ESP_3V3
- R54 (5K1) connected to RTC_DAT/SDA1 and ESP_3V3

CSI_A_DATA1_P	CSI_DATA1_P
CSI_A_DATA1_N	CSI_DATA1_N
CSI_A_CLK_N	CSI_CLK_N
CSI_A_CLK_P	CSI_CLK_P
CSI_A_DATA0_P	CSI_DATA0_P
CSI_A_DATA0_N	CSI_DATA0_N
DSI_A_DATA1_P	DSI_DATA1P
DSI_A_DATA1_N	DSI_DATA1N
DSI_A_CLK_N	DSI_CLK_N
DSI_A_CLK_P	DSI_CLK_P
DSI_A_DATA0_P	DSI_DATA0_P
DSI_A_DATA0_N	DSI_DATA0_N
ESP_VDD_HP	ESP_VDD_HP_DCDC
CODEC_I2S0_DSDIN	GPI09


ESP32C6

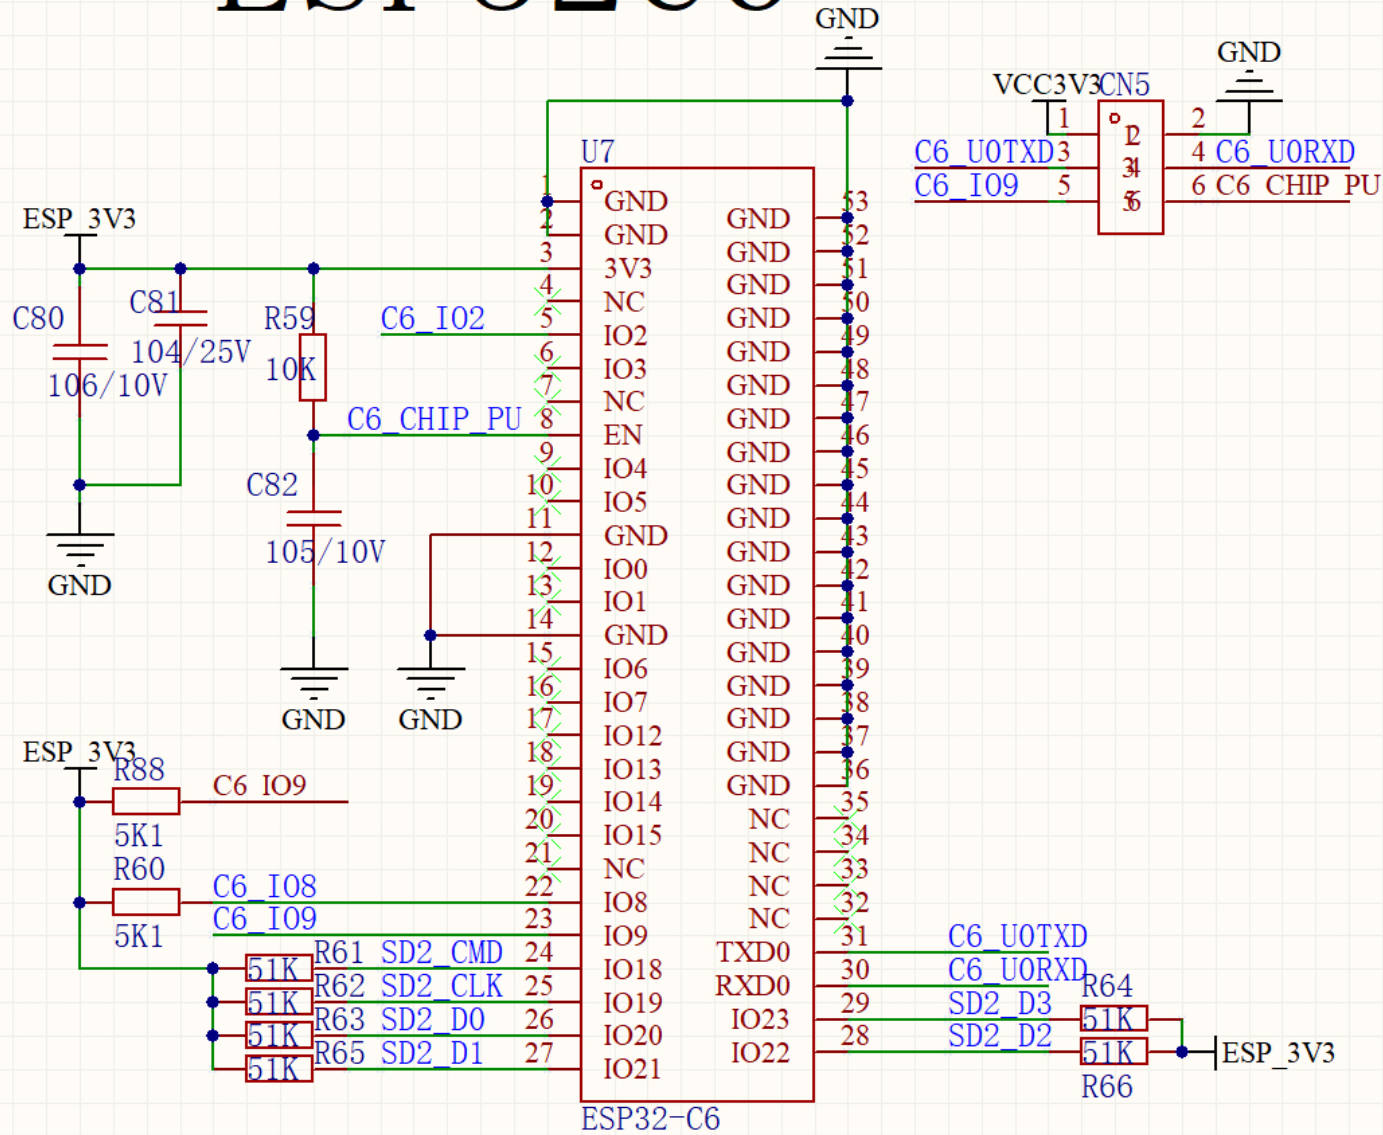

Full Speed USB

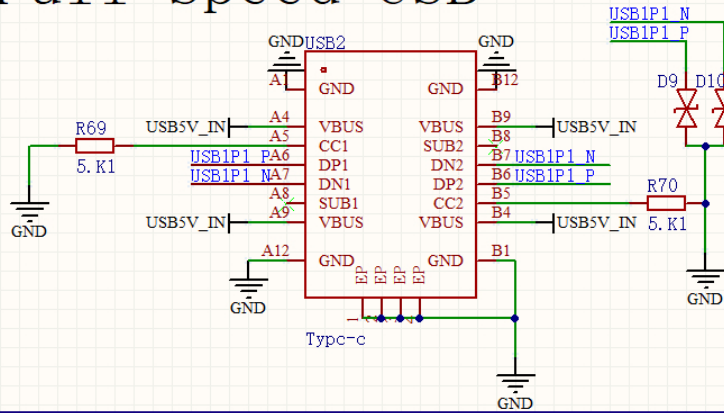

USB-TTL

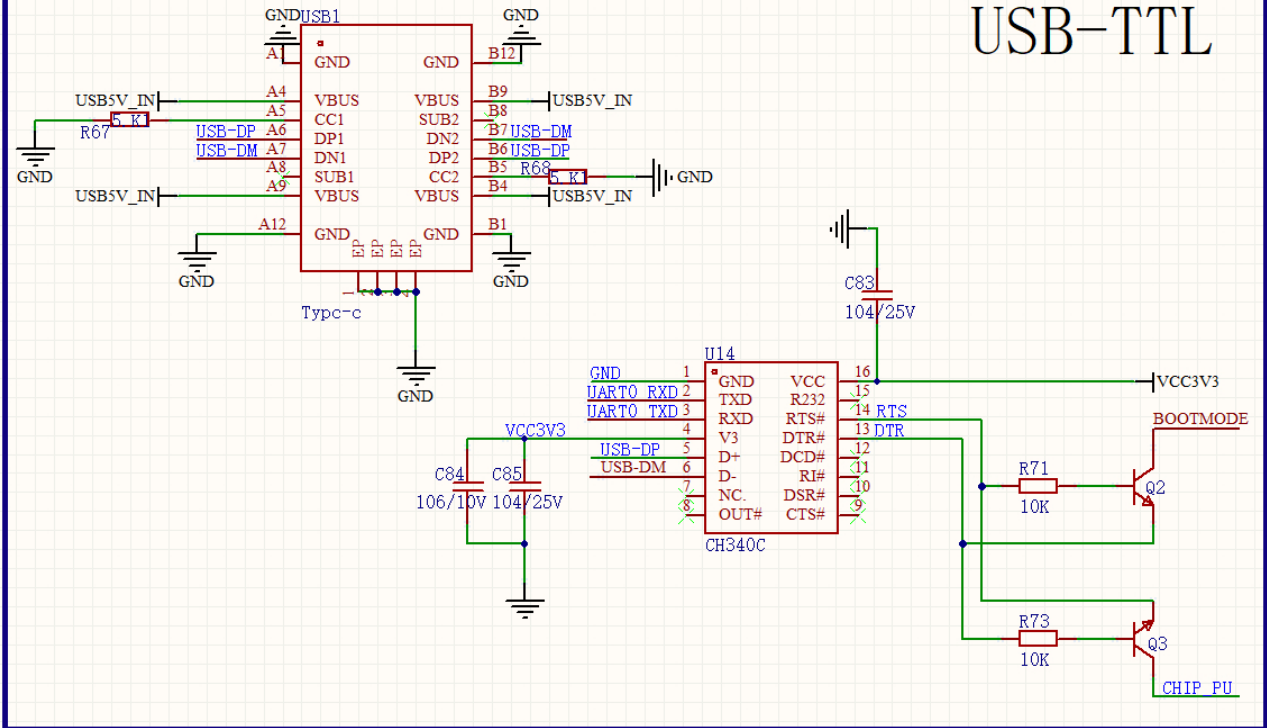

High speed USB

