
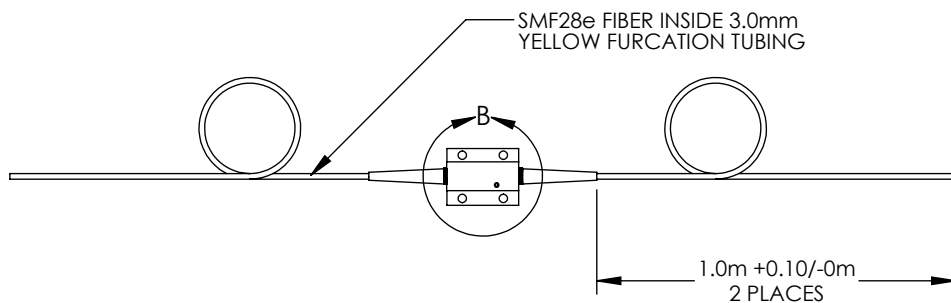
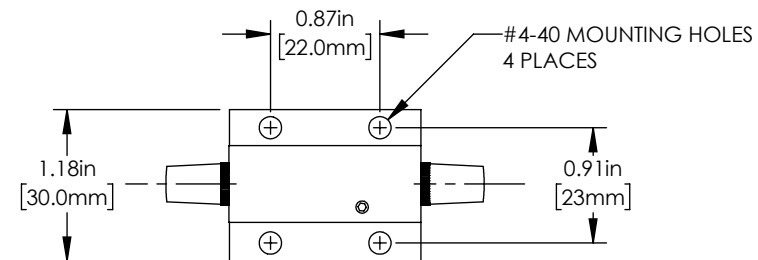



ATTENUATOR SPECIFICATIONS

OPERATING WAVELENGTH	1310±20 / 1550±20nm
ATTENUATION RANGE	1.5-50dB
ATTENUATION RESOLUTION	0.1dB (TYP)
RETURN LOSS (BACK REFLECTION)	>55dB
PDL	<0.2dB
MAX POWER	300mW
OPERATING TEMPERATURE	0 TO 60°C
STORAGE TEMPERATURE	-40 TO 85°C

FOR INFORMATION ONLY
NOT FOR MANUFACTURING PURPOSES

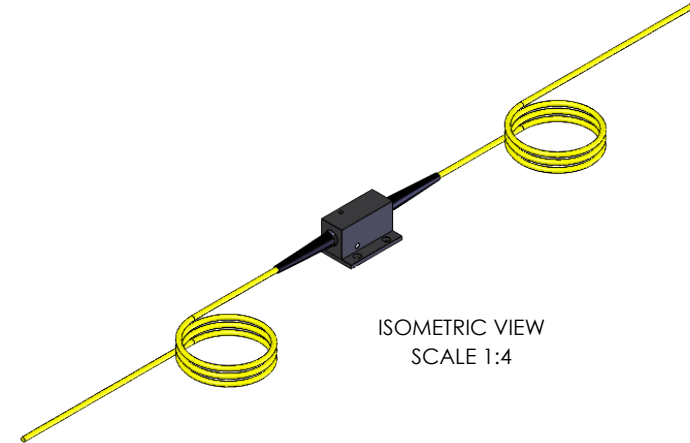

DETAIL B
SCALE 2 : 3

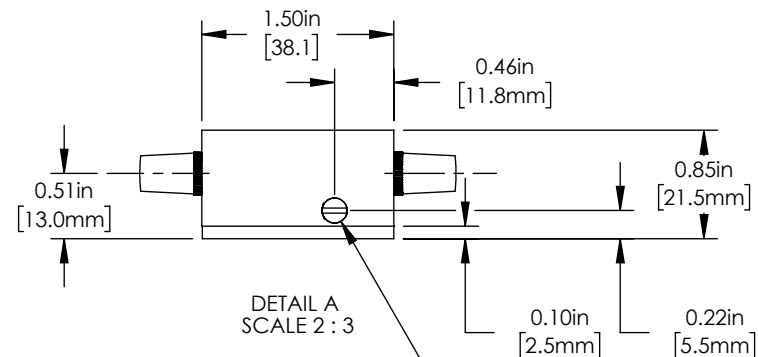

DETAIL A
SCALE 2 : 3

FLAT HEAD SCREW
USED FOR ATTENUATION
ADJUSTMENT

DRAWING
PROJECTION



	NAME	DATE
DRAWN	JB	19/APR/13
APPROVAL	BAG	12/FEB/18

COPYRIGHT © 2018 BY THORLABS

VALUES IN PARENTHESIS ARE CALCULATED
AND MAY CONTAIN ROUND OFF ERRORS

THORLABS
www.thorlabs.com

SM VARIABLE OPTICAL ATTENUATOR,
1310/1550nm, 50dB

MATERIAL

N/A

REV
D

ITEM #

VOA50

APPROX WEIGHT

0.15 kg