

MATERIALS AND FINISHES:


BODY: ZINC ALLOY
PLATED NICKEL

CENTER CONTACT: PHOSPHOR BRONZE
PLATED GOLD

INSULATOR: POLYPROPYLENE (94V2)

BOARD LOCK: PHOSPHOR BRONZE
PLATED TIN

SOLDER TAIL: COPPER OVER STEEL
PLATED TIN

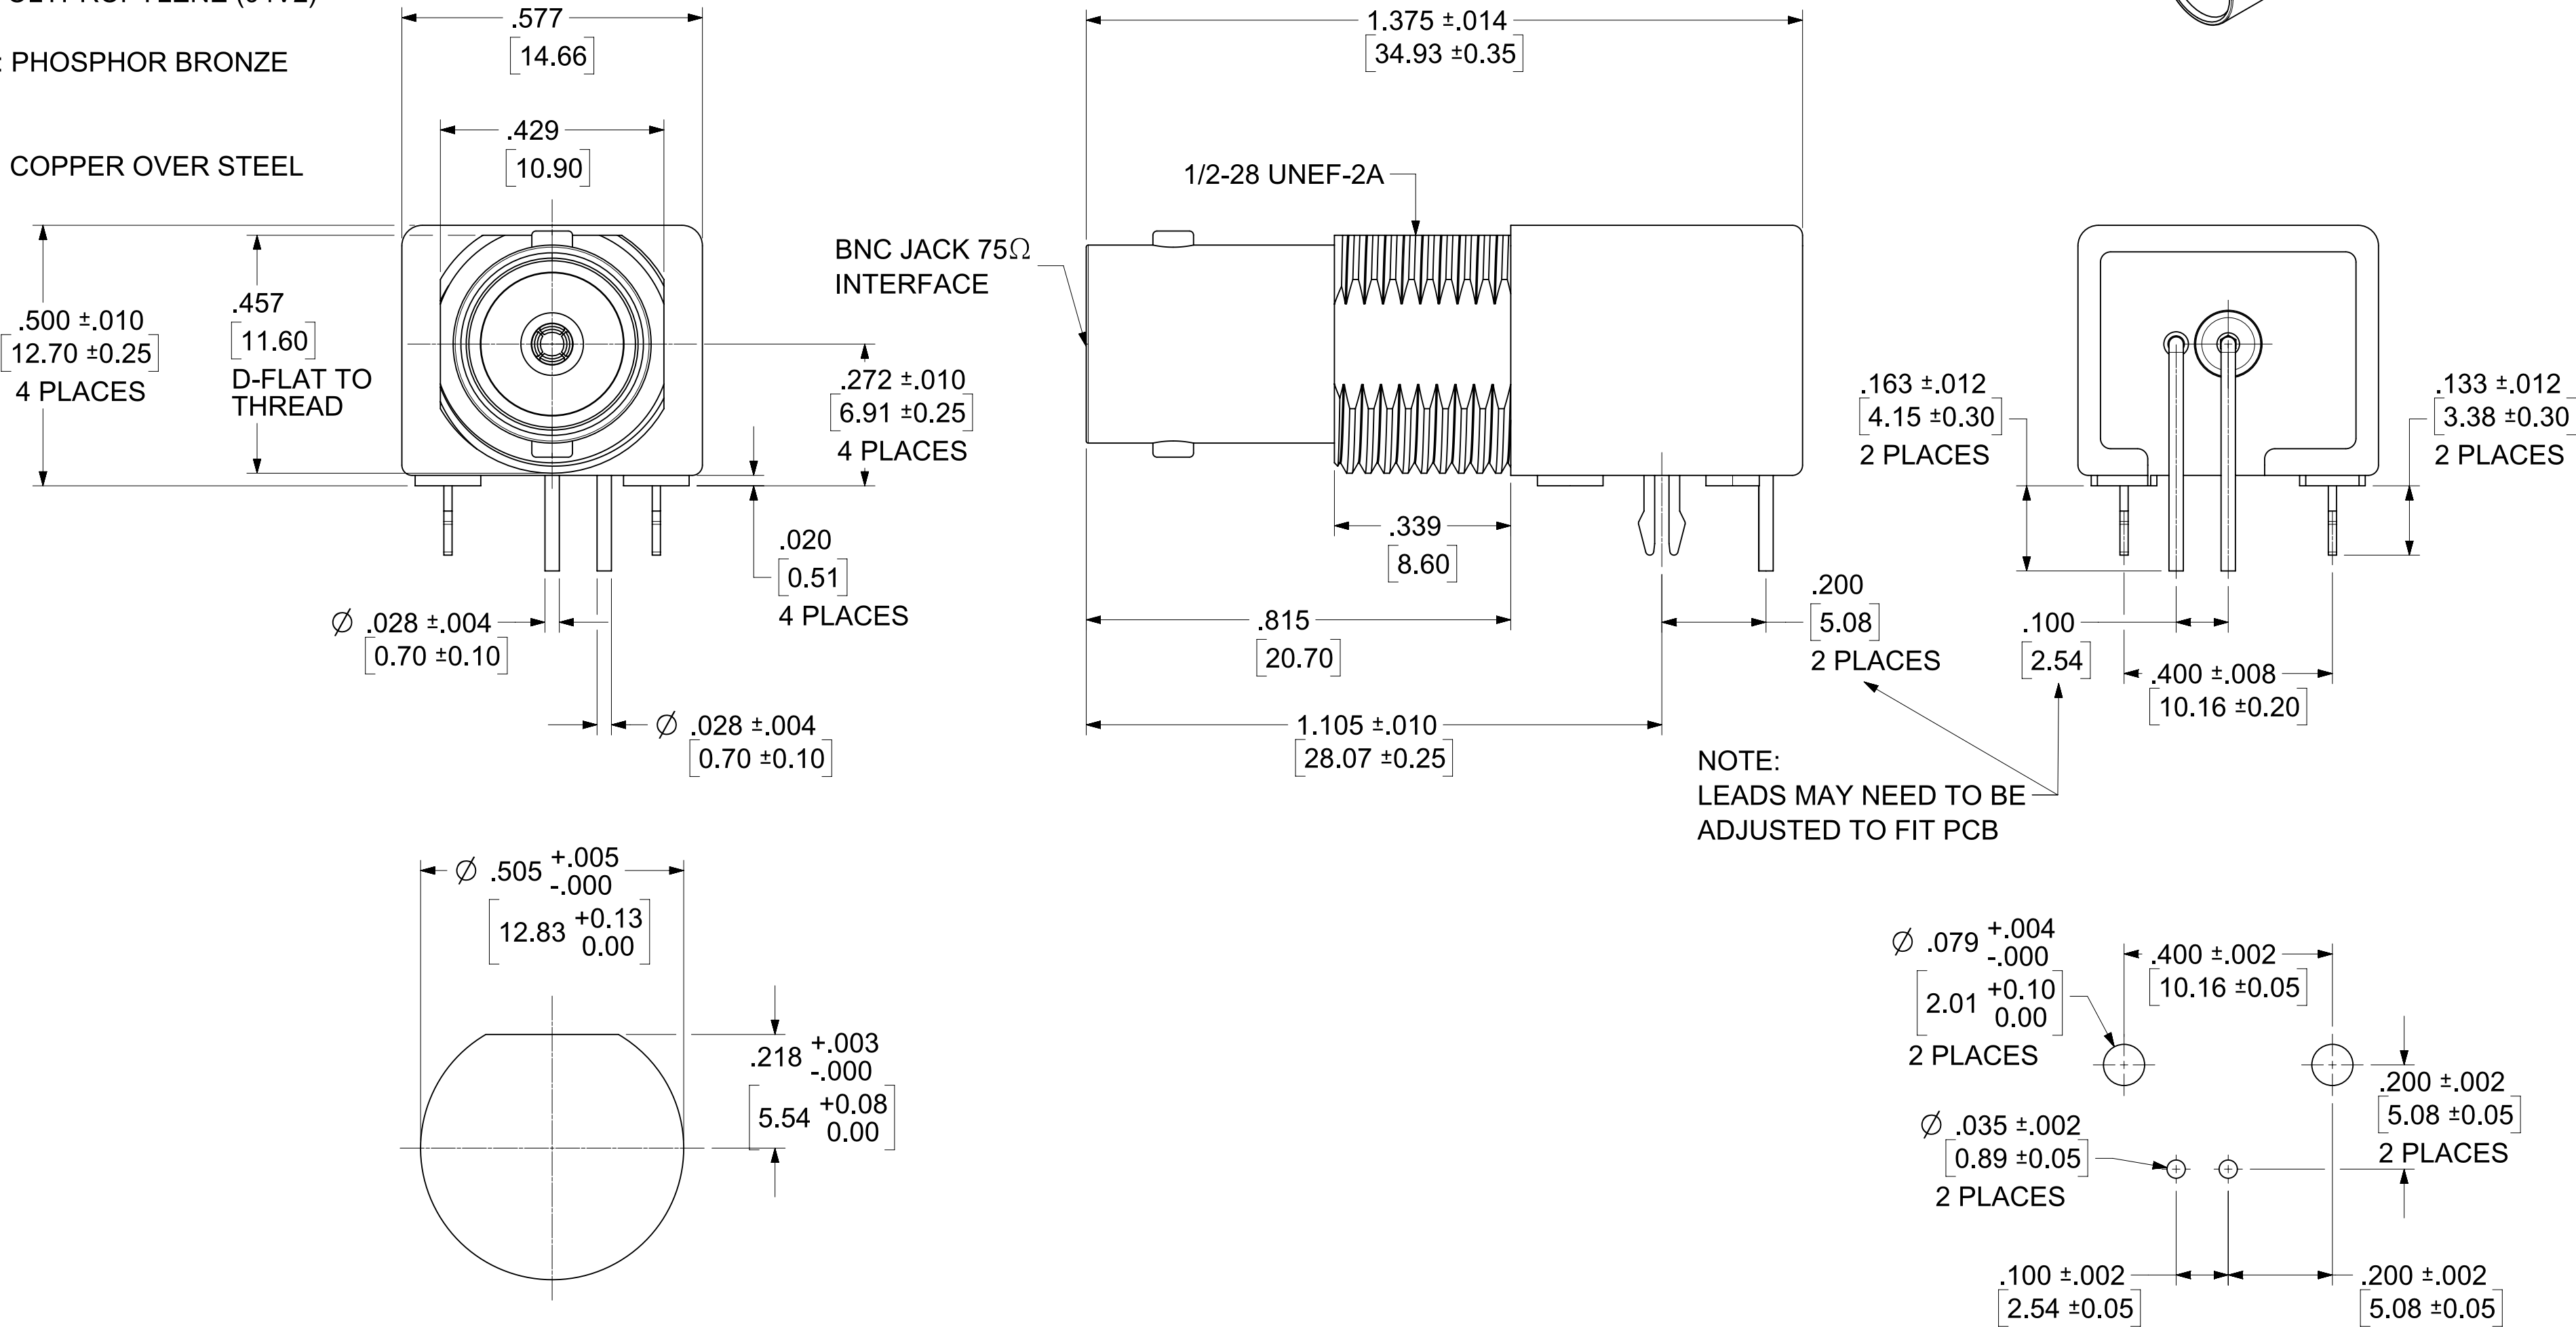

RECOMMENDED MOUNTING HOLE
PANEL THICKNESS: .216 (5.40) MAX
TORQUE: 1.36 N-m (12 INCH-LBS) MAX

RECOMMENDED PCB LAYOUT

73171-4330	73101-0120 ONE PER BAG	895420089
73101-0120	73101-0120 TRAY	895420550
PART NO.	DESCRIPTION	PACKING SPEC

PS-89675-1030	PRODUCTION SPECIFICATION
SPECIFICATION	DESCRIPTION

LABEL WITH EACH BAG
FOR 73171-4330

PART NUMBER: 73101-0120
ORDER NUMBER: 73171-4330
MOLEX
DATE: YYWW

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION												
DIMENSION UNITS		SCALE		CURRENT REV DESC: UPDATE VIEW OF RECOMMENDED PCB LAYOUT			<div>molex</div>					
INCH/MM		NTS										
GENERAL TOLERANCES (UNLESS SPECIFIED)				PHASE: CO NO: DRWN: Ricky Yeh 2023-10-25 CHK'D: Kerrie Chen 2023-10-31 APPR: Darry Cheng 2023-10-31			BNC JACK R/A PCB TH 75 OHMS DIE CAST EWR-2677					
		MM	INCH									
4 PLACES	±		±	INITIAL REVISION: DRWN: RFC_PLMIMP 2017-11-06 APPR:			DOCUMENT NUMBER		DOC TYPE	DOC PART	REVISION	
3 PLACES	±		± 0.0060				SD-73101-0120		PSD	001	B6	
2 PLACES	±	0.150	± 0.012									
1 PLACE	±	0.30	±									
0 PLACES	±		±									
ANGULAR TOL		± 2.0°										
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				THIRD ANGLE PROJECTION		DRAWING	SERIES	MATERIAL NUMBER		CUSTOMER		SHEET NUMBER
						C-SIZE	73101	SEE TABLE		GENERAL MARKET		1 OF 1