HAEBOT / KIRO V2-A Anker SOLIX C300 DC power block diagram

Rev A, 2026-11-13. PROPOSED architecture, not bench-verified. Port limits from the Anker A1726 user manual; loads from V1 Rev F records.

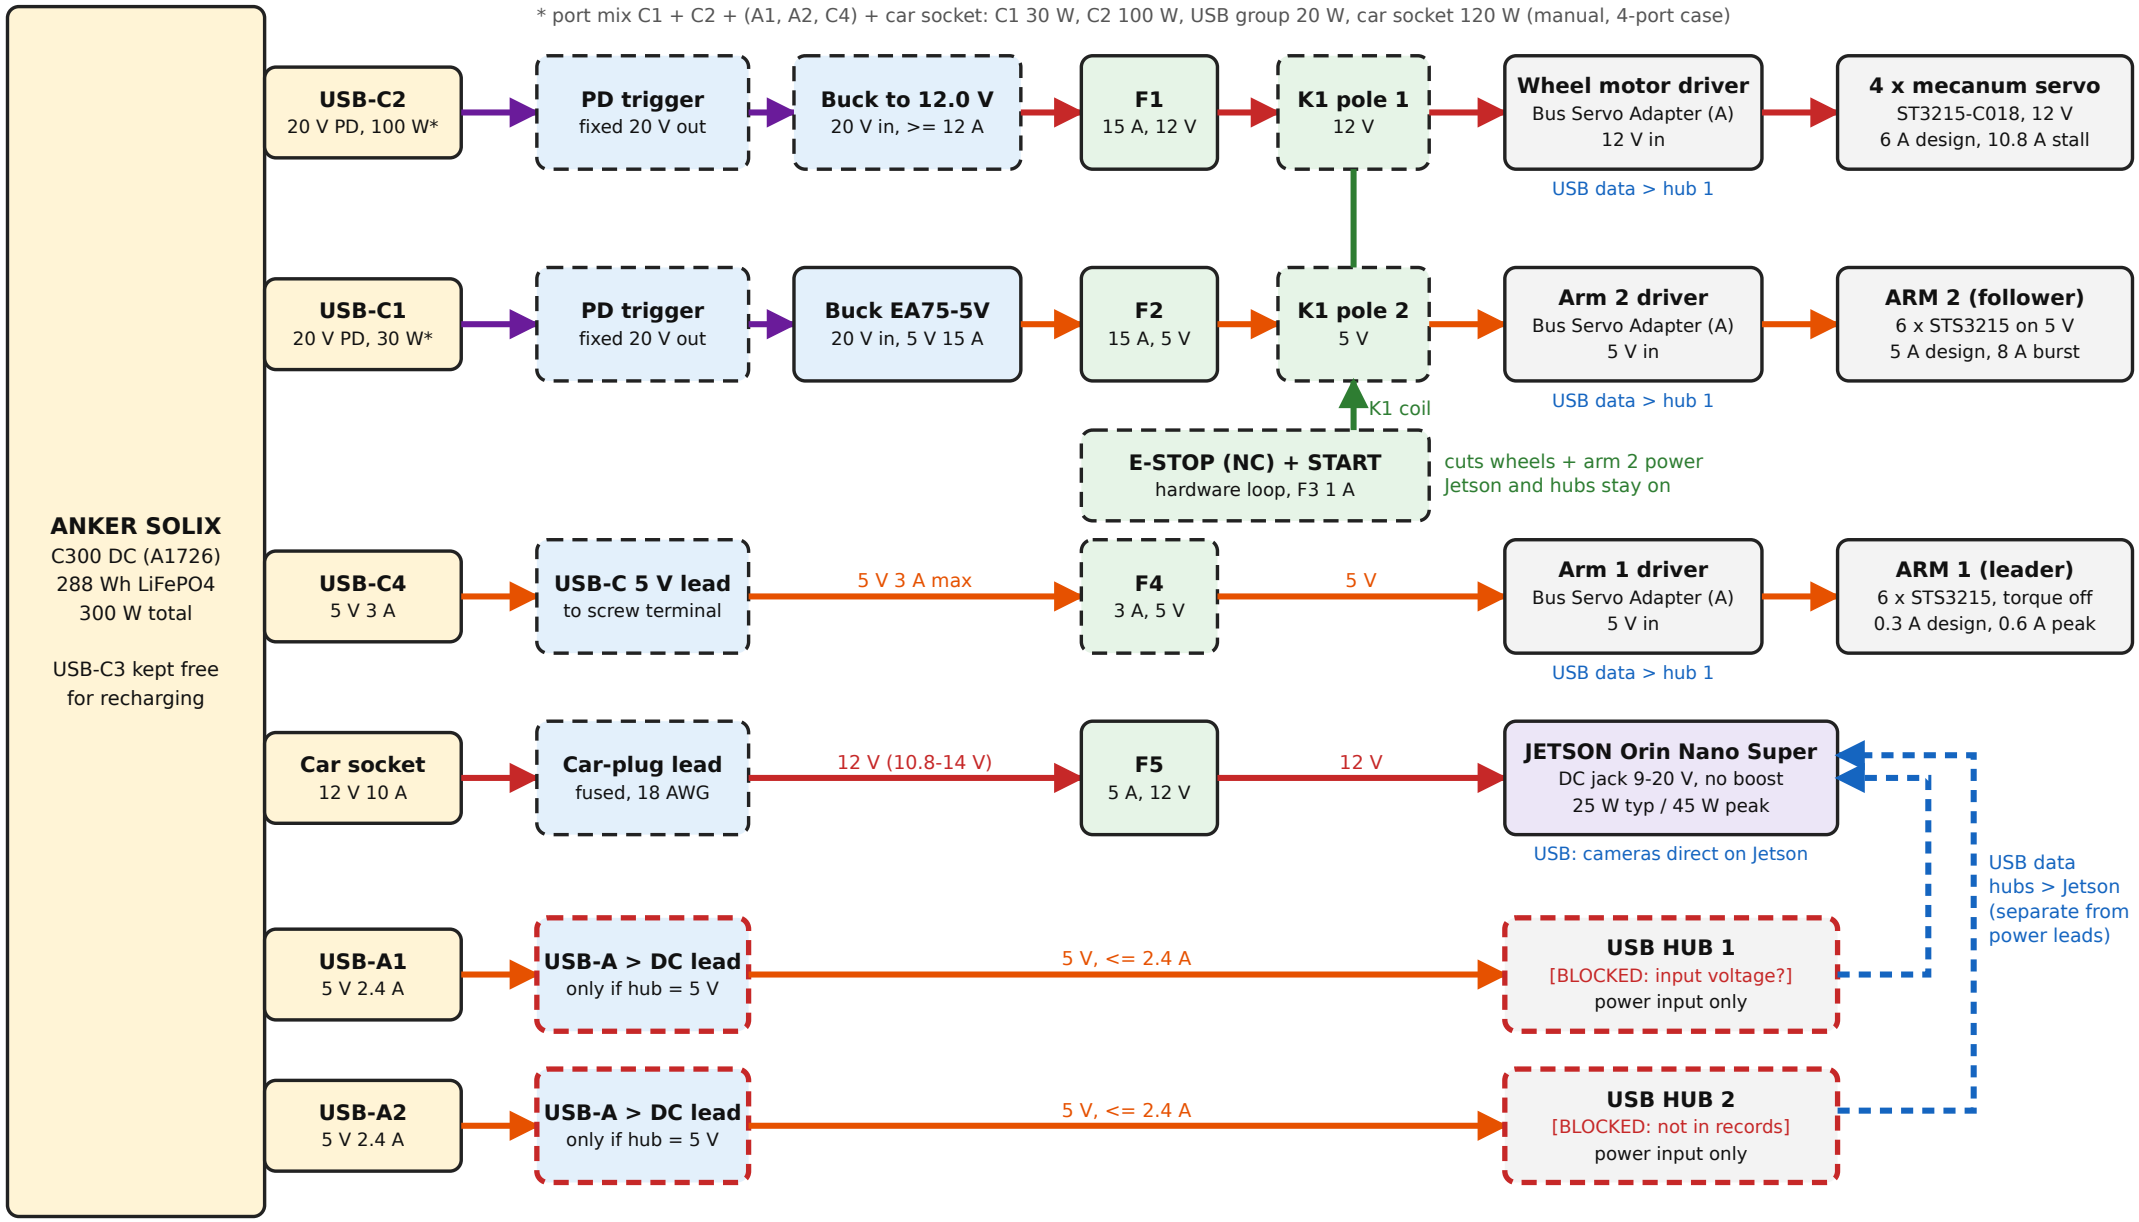

LEGEND — 20 V USB-C PD — 12 V — 5 V — USB data — protection / E-stop control

Borders: solid = existing V1 hardware dashed = PROPOSED (not bought / tested) red dashed = BLOCKED (needs a hardware fact)

Not supported as requested: 12 V PD trigger (station has no 12 V USB-C profile) and 5 V PD trigger for a follower arm (5 V PD is 3 A max).