

●オーディオ用標準品(85℃)


UTSPシリーズ

JIS C5101
CE-04

■特 徴

- ・クリアーでハイクオリティーなサウンドを実現した音響用コンデンサの標準品です。

■寸法図/DIAGRAM OF DIMENSIONS

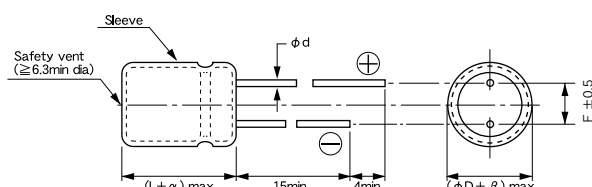

●STANDARD GRADE FOR AUDIO (85℃)

TYPE UTSP

JIS C5101
CE-04

■FEATURES

- ・ It is standard goods of the capacitor for audio that achieves clearing and a high-quality sound.

φ D	5	6.3	8	10	12.5	16	18
φ d	0.5	0.5	0.6	0.6	0.6	0.8	0.8
F	2	2.5	3.5	5.0	5.0	7.5	7.5
α	L<20: α=1.5, L≥20: α=2						
β	0.5	0.5	0.5	0.5	1.0	1.0	1.0

■性 能/PERFORMANCE SPECIFICATIONS

カ テ ゴ リ 温 度 範 囲	CATEGORY TEMPERATURE RANGE	−40℃～+85℃							
標 準 静 電 容 量 許 容 差	STANDARD CAPACITANCE TOLERANCE	−20%～+20% (120Hz)							
漏 れ 電 流 (最 大 値)	LEAKAGE CURRENT (MAX. VALUE)	I=0.01CV OR 3μA WHICHEVER IS THE GREATER (after 2 minutes)				C=RATED CAPACITANCE (μF) V=WORKING VOLTAGE (V)			
損 失 角 の 正 接 (最 大 値) (tan δ)	DISSIPATION FACTOR (MAX. VALUE) (tan δ)	W. V	6.3	10	16	25	35	50	63
		tan δ	0.24	0.20	0.16	0.14	0.12	0.10	0.08
		When the capacitance exceed 1000μF, the value of tan δ is increased by 0.02 for each increment of 1000μF or its fraction.							
耐 久 性 85℃ 1000時間 定格使用電圧印加	ENDURANCE APPLICATION OF RATED OPERATING VOLTAGE, AT 85℃ FOR 1000HOURS.	CAPACITANCE CHANGE :		LESS THAN 20% OF THE INITIAL MEASURED VALUE.					
		DISSIPATION FACTOR :		LESS THAN 200% OF THE INITIAL SPECIFIED VALUE.					
		LEAKAGE CURRENT :		LESS THAN THE INITIAL SPECIFIED VALUE.					
低 温 特 性 (+20℃における120Hzの インピーダンスに対する比) (最大値)	LOW TEMPERATURE STABILITY (RATIO OF IMPEDANCE AT COLD TO THAT AT 20℃, 120Hz. MAX. VALUE.)	W.V.	6.3	10	16	25	35	50	63
		Z-25℃/Z+20℃	4	3	2	2	2	2	2
		Z-40℃/Z+20℃	10	8	6	4	3	3	3
その他の特性はJIS C5101-4に準ずる	THE OTHER CHARACTERISTICS	THE OTHER CHARACTERISTICS ARE BASED ON JIS C 5101-4							

■寸法表/CASE SIZE TABLE

μF \ W.V	6.3V	10V	16V	25V	35V	50V	63V
1.0						5×11	
2.2						5×11	
3.3						5×11	
4.7				5×11	5×11	5×11	5×11
10			5×11	5×11	5×11	5×11	5×11
22	5×11	5×11	5×11	5×11	5×11	5×11	6.3×11
33	5×11	5×11	5×11	5×11	5×11	6.3×11	6.3×11
47	5×11	5×11	5×11	5×11	6.3×11	6.3×11	8×11.5
100	5×11	5×11	6.3×11	6.3×11	8×11.5	8×11.5	10×12.5
220	6.3×11	6.3×11	8×11.5	8×11.5	10×12.5	10×16	10×20
330	6.3×11	8×11.5	8×11.5	10×12.5	10×16	10×20	12.5×20
470	8×11.5	8×11.5	10×12.5	10×16	10×20	12.5×20	12.5×25
1000	10×12.5	10×16	10×20	12.5×20	12.5×25	16×25	16×31.5
2200	12.5×20	12.5×20	12.5×25	16×25	16×31.5	18×35.5	18×40
3300	12.5×20	12.5×25	16×25	16×31.5	18×35.5		
4700	16×25	16×25	16×31.5	18×35.5	18×40		
6800	16×25	16×31.5	18×35.5				
10000	16×31.5	18×35.5	18×40				
12000	16×35.5	18×35.5					
15000	18×35.5	18×40					
18000	18×40						

■品番ご指定法/HOW TO SPECIFY ITEM NUMBER

