



■ PACKAGE DIMENSIONS

UNIT: mm

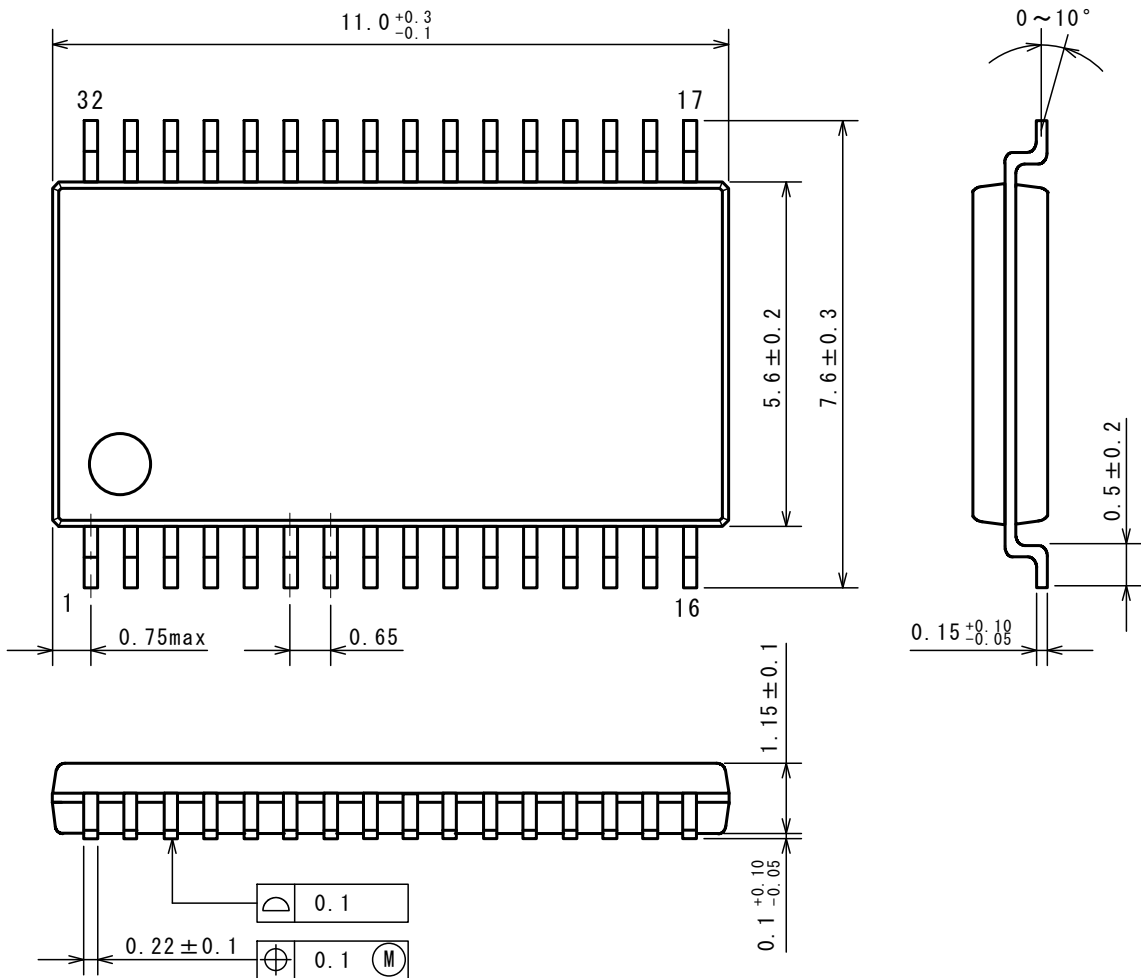

■ EXAMPLE OF SOLDER PADS DIMENSIONS

UNIT: mm

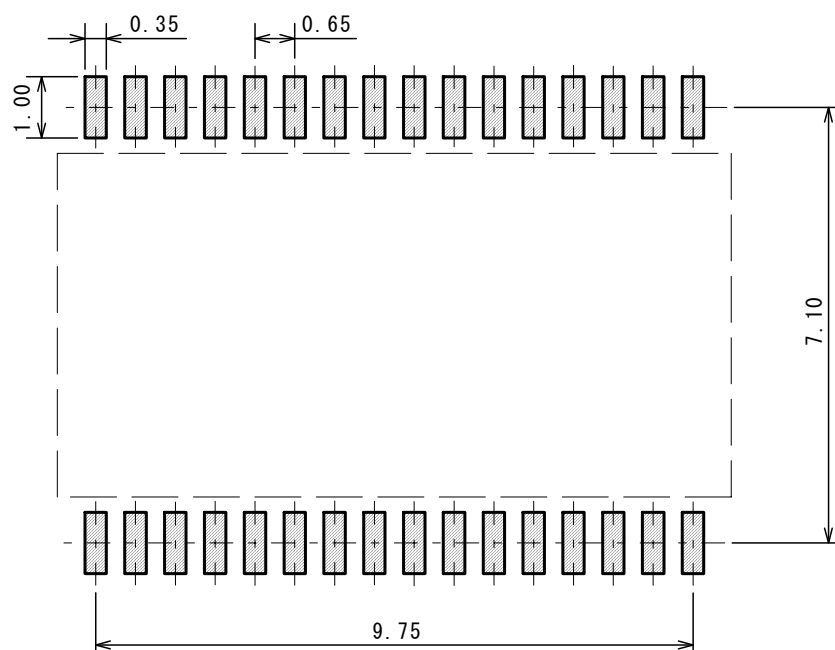

Nisshinbo Micro Devices Inc.


SSOP32

PI-SSOP32-E-A

■ PACKING SPEC


UNIT: mm

TAPING DIMENSIONS

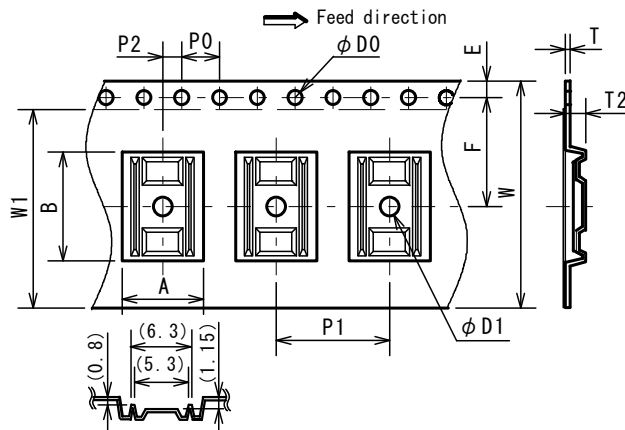


SYMBOL	DIMENSION	REMARKS
A	8.6 ± 0.1	BOTTOM DIMENSION
B	11.5 ± 0.1	BOTTOM DIMENSION
D0	$1.5^{+0.1}_0$	
D1	$2.0^{+0.1}_0$	
E	1.75 ± 0.1	
F	11.5 ± 0.01	
P0	4.0 ± 0.1	
P1	12.0 ± 0.1	
P2	2.0 ± 0.1	
T	0.3 ± 0.05	
T2	2.1 ± 0.1	
W	24.0 ± 0.3	
W1	21.0 ± 0.1	THICKNESS 0.1max

REEL DIMENSIONS

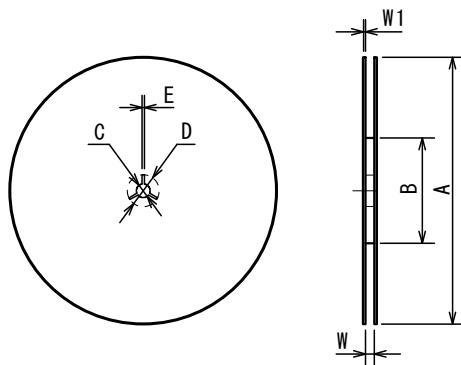

SYMBOL	DIMENSION
A	$\phi 330 \pm 2$
B	$\phi 80 \pm 1$
C	$\phi 13 \pm 0.5$
D	$\phi 21 \pm 0.8$
E	2 ± 0.5
W	25.5 ± 1.0
W1	2

TAPING STATE

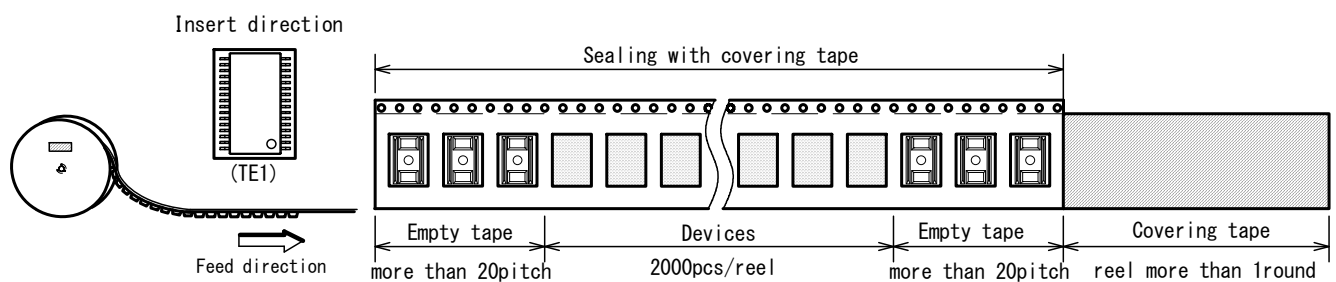

PACKING STATE

