


## 10.LOGICAL OPERATION

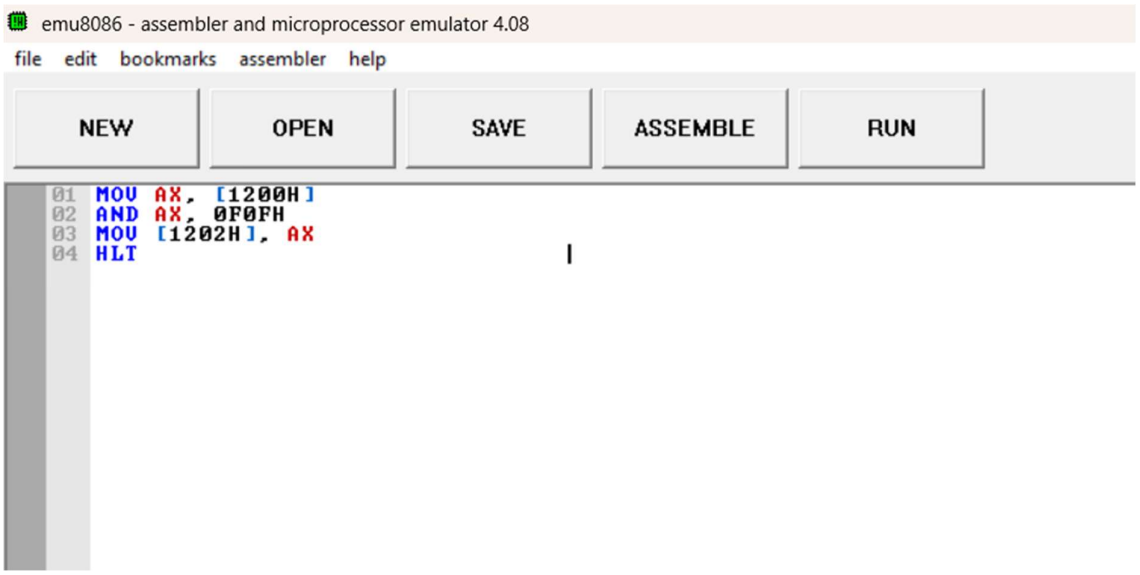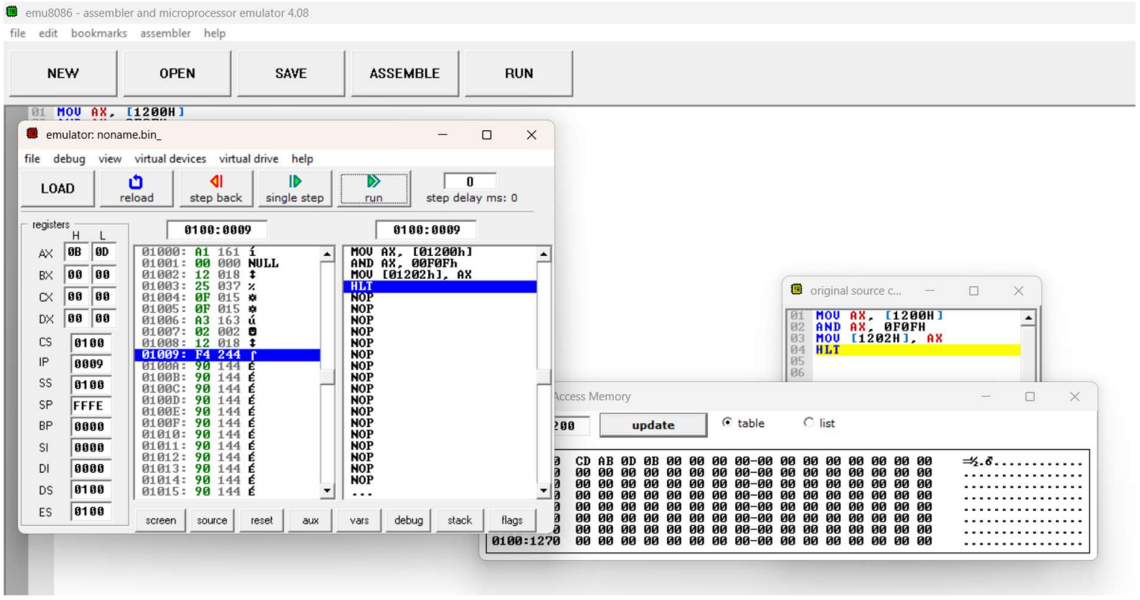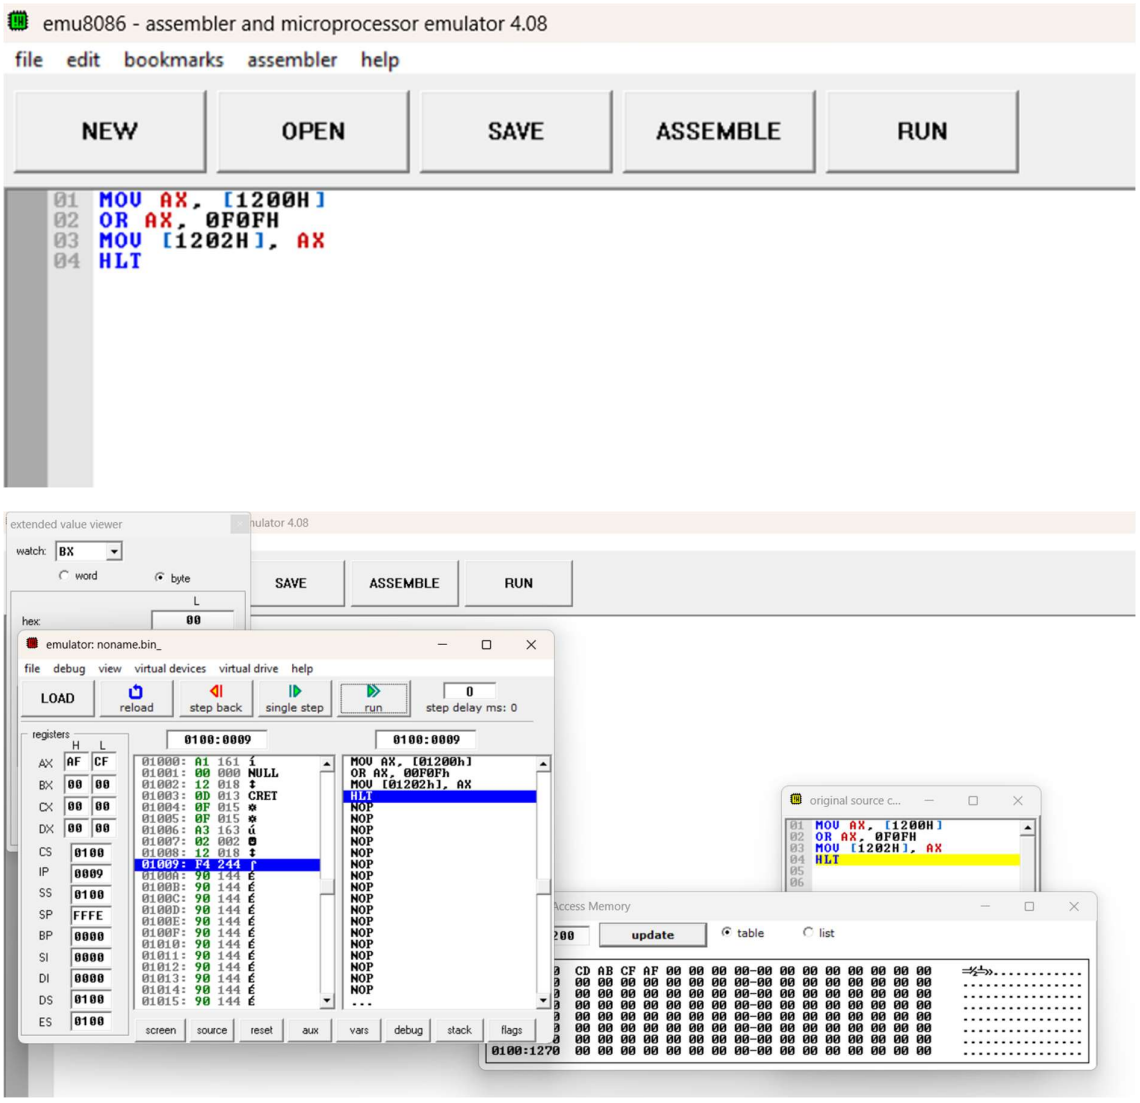


emu8086 - assembler and microprocessor emulator 4.08
file edit bookmarks assembler help
NEW
OPEN
SAVE
ASSEMBLE
RUN
01 MOV AX, [1200H]
02 OR AX, 0F0FH
03 MOV [1202H], AX
04 HLT
extended value viewer
watch: BX
word
byte
hex:
emulator: noname.bin_
file debug view virtual devices virtual drive help
LOAD
reload
step back
single step
run
step delay ms: 0
registers
AX AF CF
BX 00 00
CX 00 00
DX 00 00
CS 0100
IP 0009
SS 0100
SP FFFE
BP 0000
SI 0000
DI 0000
DS 0100
ES 0100
0100:0009
01000: A1 161 í
01001: 00 000 NULL
01002: 12 018 ↕
01003: 0D 013 CRET
01004: 0F 015 ☼
01005: 0F 015 ☼
01006: A3 163 ú
01007: 02 002 ☻
01008: 12 018 ↕
01009: F4 244 ⌠
0100A: 90 144 É
0100B: 90 144 É
0100C: 90 144 É
0100D: 90 144 É
0100E: 90 144 É
0100F: 90 144 É
01010: 90 144 É
01011: 90 144 É
01012: 90 144 É
01013: 90 144 É
01014: 90 144 É
01015: 90 144 É
screen source reset aux vars debug stack flags
MOV AX, [01200h]
OR AX, 00F0Fh
MOV [01202h], AX
HLT
NOP
original source c...
Access Memory
update
table
list
0100:1270 00 00 00 00 00 00 00 00-00 00 00 00 00 00 00 00