
Konfiguration - Beispiel SNMP

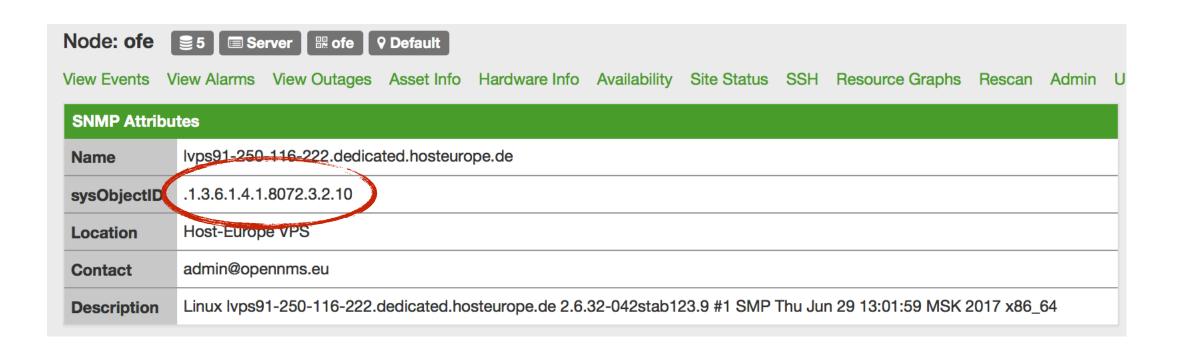

sysObjectID

.1.3.6.1.4.1.8072.3.2.10

Konfiguration - Beispiel SNMP

sysObjectID

.1.3.6.1.4.1.8072.3.2.10

```
<systemDef name="Enterprise">
  <sysoidMask>.1.3.6.1.4.1.3/sysoidMask>
  <collect>
    <includeGroup>mib2-interfaces</includeGroup>
    <includeGroup>mib2-X-interfaces/includeGroup>
    <includeGroup>mib2-icp</includeGroup>
    <includeGroup>mib2-powerethernet</includeGroup>
  </collect>
</systemDef>
     <group name="mib2-X-interfaces" ifType="all">
      <mibObj oid=".1.3.6.1.2.1.31.1.1.1" instance="ifIndex" alias="ifName"</pre>
                                                                                    type="string" />
      <mibObj oid=".1.3.6.1.2.1.31.1.1.1.15" instance="ifIndex" alias="ifHighSpeed"</pre>
                                                                                    type="string" />
                                            instance="ifIndex" alias="ifHCInOctets"
                                                                                    type="Counter64" />
      <mib0bj oid=".1.3.6.1.2.1.31.1.1.1.6"
```

</group>

<mibObj oid=".1.3.6.1.2.1.31.1.1.1.10" instance="ifIndex" alias="ifHCOutOctets" type="Counter64" />